

# RITY103

10" ALL IN ONE Fanless POS Terminal

## Quick Reference Guide

1<sup>st</sup> Ed – 17 February 2021

### Copyright Notice

Copyright © 2021 Avalue Technology Inc., ALL RIGHTS RESERVED.

## FCC Statement



THIS DEVICE COMPLIES WITH PART 15 FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE.

(2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

THIS EQUIPMENT HAS BEEN TESTED AND FOUND TO COMPLY WITH THE LIMITS FOR A CLASS "A" DIGITAL DEVICE, PURSUANT TO PART 15 OF THE FCC RULES.

THESE LIMITS ARE DESIGNED TO PROVIDE REASONABLE PROTECTION AGAINST HARMFUL INTERFERENCE WHEN THE EQUIPMENT IS OPERATED IN A COMMERCIAL ENVIRONMENT. THIS EQUIPMENT GENERATES, USES, AND CAN RADIATE RADIO FREQUENCY ENERGY AND, IF NOT INSTALLED AND USED IN ACCORDANCE WITH THE INSTRUCTION MANUAL, MAY CAUSE HARMFUL INTERFERENCE TO RADIO COMMUNICATIONS.

OPERATION OF THIS EQUIPMENT IN A RESIDENTIAL AREA IS LIKELY TO CAUSE HARMFUL INTERFERENCE IN WHICH CASE THE USER WILL BE REQUIRED TO CORRECT THE INTERFERENCE AT HIS OWN EXPENSE.

## A Message to the Customer

### ***Avalue Customer Services***

Each and every Avalue's product is built to the most exacting specifications to ensure reliable performance in the harsh and demanding conditions typical of industrial environments. Whether your new Avalue device is destined for the laboratory or the factory floor, you can be assured that your product will provide the reliability and ease of operation for which the name Avalue has come to be known.

Your satisfaction is our primary concern. Here is a guide to Avalue's customer services. To ensure you get the full benefit of our services, please follow the instructions below carefully.

### ***Technical Support***

We want you to get the maximum performance from your products. So if you run into technical difficulties, we are here to help. For the most frequently asked questions, you can easily find answers in your product documentation. These answers are normally a lot more detailed than the ones we can give over the phone. So please consult the user's manual first.

To receive the latest version of the user's manual; please visit our Web site at:

<http://www.avalue.com.tw/>

# Content

<b>1.</b>	<b>Getting Started .....</b>	<b>4</b>
1.1	Safety Precautions .....	4
1.2	Packing List.....	4
1.3	System Specifications .....	5
1.4	System Overview .....	8
1.4.1	Rear View .....	8
1.5	System Dimensions .....	9
<b>2.</b>	<b>Hardware Configuration .....</b>	<b>10</b>
2.1	RITY103 connector mapping .....	11
2.2.1	External Serial Port 1 connector (COM1) .....	11
2.2.2	External Serial Port 2 connector (COM2) .....	12
2.2.3	Cash Drawer connector (C/D) .....	13

# 1. Getting Started

## 1.1 Safety Precautions

### Warning!



Always completely disconnect the power cord from your chassis whenever you work with the hardware. Do not make connections while the power is on. Sensitive electronic components can be damaged by sudden power surges. Only experienced electronics personnel should open the PC chassis.

### Caution!



Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. As a safety precaution, use a grounding wrist strap at all times. Place all electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.

## 1.2 Packing List

- 1 x RITY Series Panel PC
- 1 x Power Adapter
- 1 x Power Cord
- 1 x Wall mount VESA kit 75x75



---

If any of the above items is damaged or missing, contact your retailer.

---

## 1.3 System Specifications

<b>Component</b>	
<b>Mother Board</b>	Intel® Celeron® Apollo Lake Platform
<b>CPU</b>	Intel® Celeron® Processor N3350
<b>Memory</b>	Default 1 x 204-pin SODIMM Socket with 4GB DDR3L Optional to 8GB
<b>Adapter</b>	DC 24V power input by Power Mini DIN 4P connector
<b>System Fan</b>	Fanless
<b>Speaker</b>	Speaker x2 on back
<b>Operating System</b>	Windows 10 64bit
<b>Storage</b>	
<b>Solid State Drive</b>	M.2 2242 SSD optional mSATA module supported by customized PCBA No support 2.5" Device
<b>Other Storage Device</b>	mSATA by M.2 B key slot optional
<b>Panel</b>	
<b>LCD Panel</b>	10.1" IVO M101GWT9 1024x600 350nits LVDS interface, 30000Hrs
<b>B/L Inverter/Converter</b>	Panel built in
<b>Touch Screen</b>	Resistive: 5W touch, Capacitive
<b>Touch Controller</b>	Resistive: PenMount6000 Capacitive: EETI control board
<b>External I/O</b>	
<b>Serial Port</b>	2 x COM ports supported ( 2 x Edge I/O ) All Pin 9 supported 5V/12V 1A max output, selected by BIOS. COM1 & 2: RS232/422/485 selected in BIOS, RS422/485 by standard.
<b>USB Port</b>	2 X USB 2.0 ports 4 X USB 3.0 ports
<b>HDMI Port</b>	HDMI port
<b>LAN Port</b>	2x RJ45 connectors for Dual Giga LAN
<b>Switch</b>	Power switch on right side with cover
<b>Indicator Light</b>	Front panel right side with PWR/ HDD/ LAN
<b>Expansion Slots</b>	1x M.2 B Key slot supported SSD module
<b>Others</b>	1x RJ11 connector for cash drawer
<b>Mechanical</b>	
<b>Power Type</b>	DC 19-24V power input

<b>Power Connector Type</b>	4P Mini DIN Wafer for Battery charger / Discharger
<b>Dimension</b>	260 X 178 X 42mm (Without stand)
<b>Weight</b>	3.65 kg
<b>Color</b>	White
<b>Fanless</b>	Fanless
<b>OS Support</b>	Windows 10 64bit
<b>Reliability</b>	
<b>EMI Test</b>	CE/FCC/VCCI : Class B
<b>Safety</b>	All design for this project have to comply with UL / CB / CCC
<b>Dust and Rain Test</b>	IP 65 for front panel, IP 41 for back
<b>Vibration Test</b>	<p>Follow Avalue standard:</p> <p>Random Vibration Operation                      Reference IEC60068-2-64 Testing procedures                      Test Fh : Vibration boardband random Test                      1 Test PSD : 0.00454G<sup>2</sup>/Hz , 1.5 Grms                      2 Test frequency : 5~500 Hz                      3 Test axis : X,Y and Z axis                      4 Test time : 30 minutes each axis                      5 System condition : operation mode                      6 Test curve</p> <p>Sine Vibration Test                      Reference IEC60068-2-6 Testing procedures                      Test Fc : Vibration sinusoidal                      1 Test Acceleration : 2G                      2 Test frequency : 5~500 Hz                      3 Sweep : 1 Oct/ per one minute. (logarithmic)                      4 Test axis : X,Y and Z axis                      5 Test time :30 min. each axis                      6 System condition : Non-Operating mode                      7 Test curve</p> <p>Package Vibration Test:                      Reference IEC60068-2-64 Testing procedures                      Test Fh : Vibration boardband random Test                      1 Test PSD : 0.026G<sup>2</sup>/Hz , 2.16 Grms</p>


	<p>2 Test frequency : 5~500 Hz</p> <p>3 Test axis : X,Y and Z axis</p> <p>4 Test time : 30 minutes each axis</p> <p>5 Test curve</p>
<b>Mechanical Shock Test</b>	<p>Follow Avalue standard:</p> <p>With CF/SSD: 10Grms, IEC 60068-2-27, Half Sine, 11ms</p>
<b>Drop Test</b>	<p>Follow Avalue standard:</p> <p>Package drop test</p> <p>Reference ISTA 2A, Method : IEC-60068-2-32 Test:Ed</p> <p>Test Ea : Drop Test</p> <p>1 Test phase : One corner, three edges, six faces</p> <p>2 Test high : 96.5cm</p> <p>3 Package weight : 4.5Kg</p> <p>4 Test drawing</p>
<b>Operating Temperature</b>	<p>0°C ~ 40°C</p>
<b>Operating Humidity</b>	<p>12hrs operation dwell time at 40°C/80% Relative Humidity, Non-condensing</p>
<b>Storage Temperature</b>	<p>-10°C ~ 60°C</p>



**Note:** Specifications are subject to change without notice.

## 1.4 System Overview


### 1.4.1 Rear View

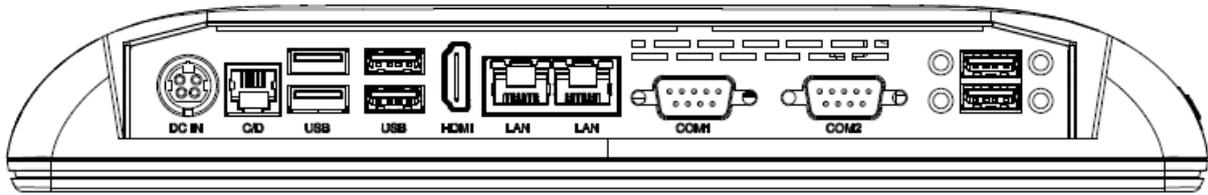

### Connectors

Label	Function	Note
COM1/2	External Serial Port 1/2 connector	DB-9 male connector
C/D	Cash Drawer connector	
USB	2 x USB 2.0 connector 4 x USB 3.0 connector	
LAN	2 x RJ-45 Ethernet connector	
HDMI	HDMI connector	
DC-IN	DC Power-in connector	

## 1.5 System Dimensions

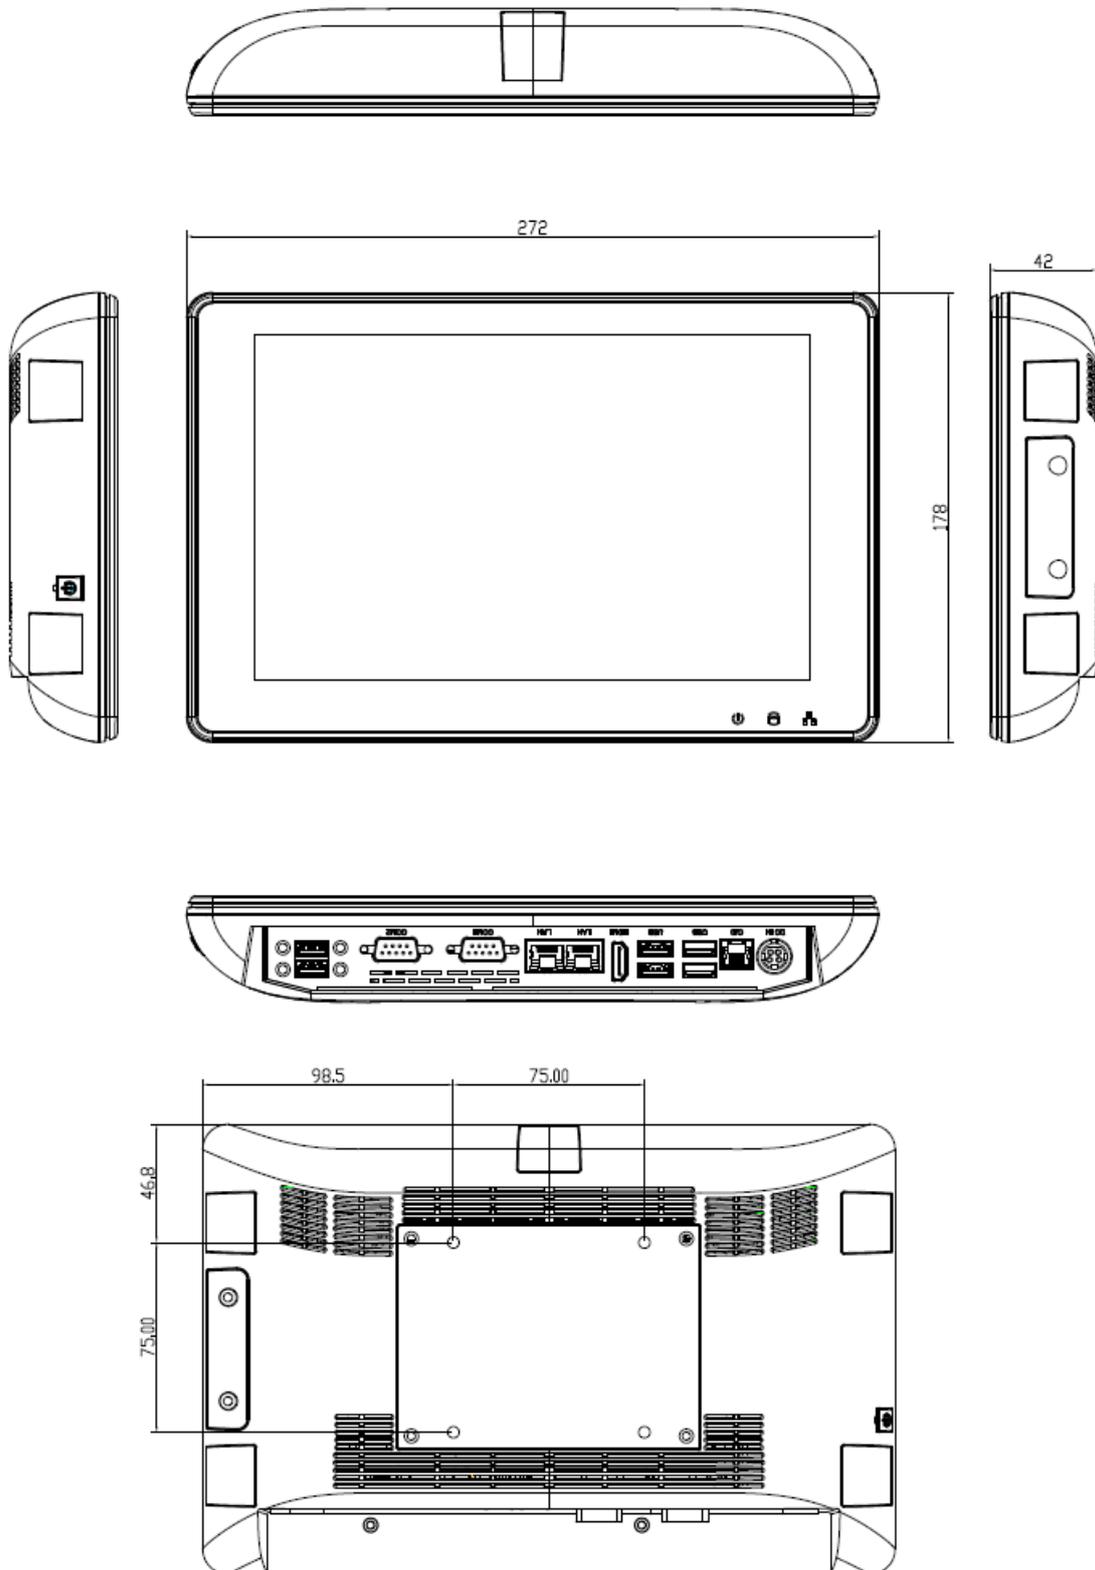

(Unit: mm)

# 2. Hardware Configuration

---





**Note:** If you need more information, please visit our website:

<http://www.avalue.com.tw>

## 2.1 RITY103 connector mapping

### 2.2.1 External Serial Port 1 connector (COM1)

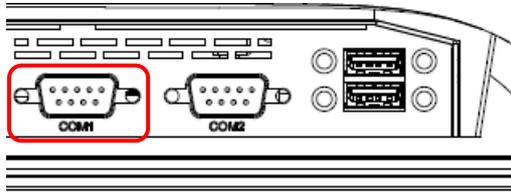

#### In RS-232 Mode

Signal	PIN	PIN	Signal
DCDA#	1	2	RXDA
TXDA	3	4	DTRA#
GND	5	6	DSRA#
RTSA#	7	8	CTSA#
RIA#	9		



#### In RS-422 Mode

Signal	PIN	PIN	Signal
TxD1-	1	2	TxD1+
RxD1+	3	4	RxD1-
GND	5	6	NC
NC	7	8	NC
NC	9		

#### In RS-485 Mode

Signal	PIN	PIN	Signal
DATA1-	1	2	DATA1+
NC	3	4	NC
GND	5	6	NC
NC	7	8	NC
NC	9		

2.2.2 External Serial Port 2 connector (COM2)

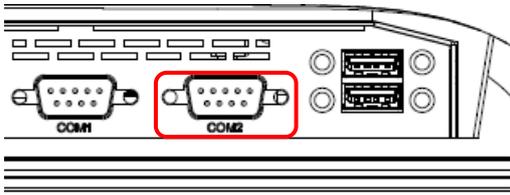

In RS-232 Mode

Signal	PIN	PIN	Signal
DCDB#	1	2	RXDB
TXDB	3	4	DTRB#
GND	5	6	DSRB#
RTSB#	7	8	CTSB#
RIB#	9		



In RS-422 Mode

Signal	PIN	PIN	Signal
TxD1-	1	2	TxD1+
RxD1+	3	4	RxD1-
GND	5	6	NC
NC	7	8	NC
NC	9		

In RS-485 Mode

Signal	PIN	PIN	Signal
DATA1-	1	2	DATA1+
NC	3	4	NC
GND	5	6	NC
NC	7	8	NC
NC	9		

2.2.3 Cash Drawer connector (C/D)

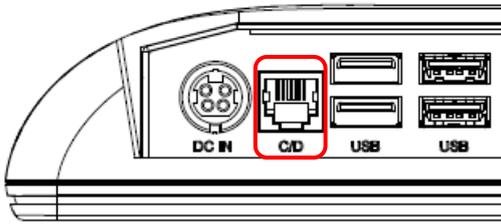

Signal	PIN
GND	1
KICKOUT1	2
CASH_SENSE	3
+V_CASH	4
KICKOOUT2	5
GND	6

