




Features

- PICMG COM R3.1 Type 6 module with Intel Atom® x7000RE Processors
- 1 x 262-pin DDR5 4800MHz SO-DIMM socket, supports up to 16GB Max, support In-Band ECC memory protection (selected SKUs)
- 1 x Intel® i226-IT
- Intel® HD Audio Integrated in SOC
- Onboard TPM 2.0
- COMe Type 6 Basic Size: 3.74" x 3.74" (95 x 95 mm)
- DC in +9V ~ +19V

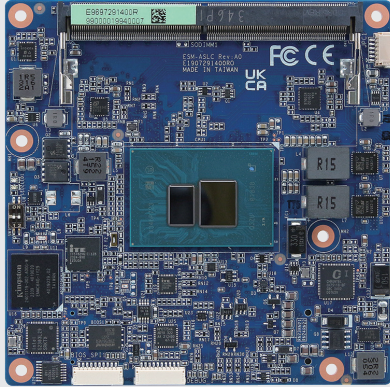

DDR5
SO-DIMM



USB 3.2



DP



HDMI



LVDS

Specifications

System Information

Processor	Intel Atom® x7000RE Series Processors
System Memory	1 x 262-pin DDR5 4800MHz SO-DIMM socket, supports up to 16GB Max, support In-Band ECC memory protection (selected SKUs)
I/O Chipset	EC iTE IT5782VG-I-128/BX or Super IO Equivalent
Watchdog Timer	H/W Reset, 1Sec. ~ 65535Sec. and 1Sec./Step
BIOS	AMI uEFI BIOS, 256 Mbit SPI Flash ROM
H/W Status Monitor	Monitoring System Temperature Voltage and FAN Status with Auto Throttling Control
TPM	Onboard TPM 2.0

Expansion

Expansion	BOM1(default): 4 x PCIe x1 Gen3 BOM2: 1 x PCIe x4 Gen3 BOM3: 2 x PCIe x1 Gen3
-----------	---

Storage

Storage	eMMC 5.1 Up to 128GB (Optional)
---------	---------------------------------

Display

Graphic Chipset	Intel® UHD Graphics
Spec. & Resolution	HDMI 2.0b: 1920x1080 as Default or 4096x2160 @60Hz set by Bios. *VBT1 use Vbios for Full HD/ no display audio. VBT3 use Vbios for output 4K/ support display audio DP 1.4: 3840x2160 @60Hz LVDS (via eDP-to-LVDS): 1920x1080 @60Hz, LVDS via CH7511B or eDP 1.4b (By BOM Optional): 2 Lanes FHD 1920x1080 @60Hz
Multiple Display	Triple Display Support
LVDS	CH7511B (eDP to LVDS)
DDI	DDIA: 2 CH LVDS (via eDP-to-LVDS) or eDP (By BOM Optional) DDIB: DDI Signal TCP0: DDI Signal or Type C Signal

Audio

Audio Interface	Intel® HD Audio Integrated on CPU
-----------------	-----------------------------------

Ethernet

LAN Chipset	1 x Intel® i226-IT
Ethernet Interface	10/100/1000/2500 Base-Tx GbE Compatible

Software Support

OS	Windows 11 64-bit, Linux
----	--------------------------

Certification

Certification Information	CE, FCC Class, RoHS Compliant
---------------------------	-------------------------------


I/O

USB	BOM1(default): 8 x USB2.0, 2 x USB3.2 Gen 2x1 BOM2: 8 x USB2.0, 4 x USB3.2 Gen 2x1 BOM3: 8 x USB2.0, 4 x USB3.2 Gen 2x1
COM Port	2 x UART (RX/TX Only)
SATA	BOM1(default): 2 x SATA III BOM2: N/A BOM3: 2 x SATA III
DIO	1 x 8-bit GPIO
MIO	1 x SMBus 1 x LPC 1 x eSPI (W-B 10Px1 1.0mm 90D for debug conn) 1 x I²C 1 x SPI

Mechanical & Environmental

Operating Temp.	Extended -40°C ~ 80°C (-40°F ~ 176°F)
Storage Temp.	-40°C ~ 75°C (-40°F ~ 167°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Weight	0.16lbs (0.07kg)
Power Requirement	+9V ~ +19V
Power Mode	AT/ATX
Dimension (L x W)	3.74" x 3.74" (95 x 95 mm)



Mechanical Drawing

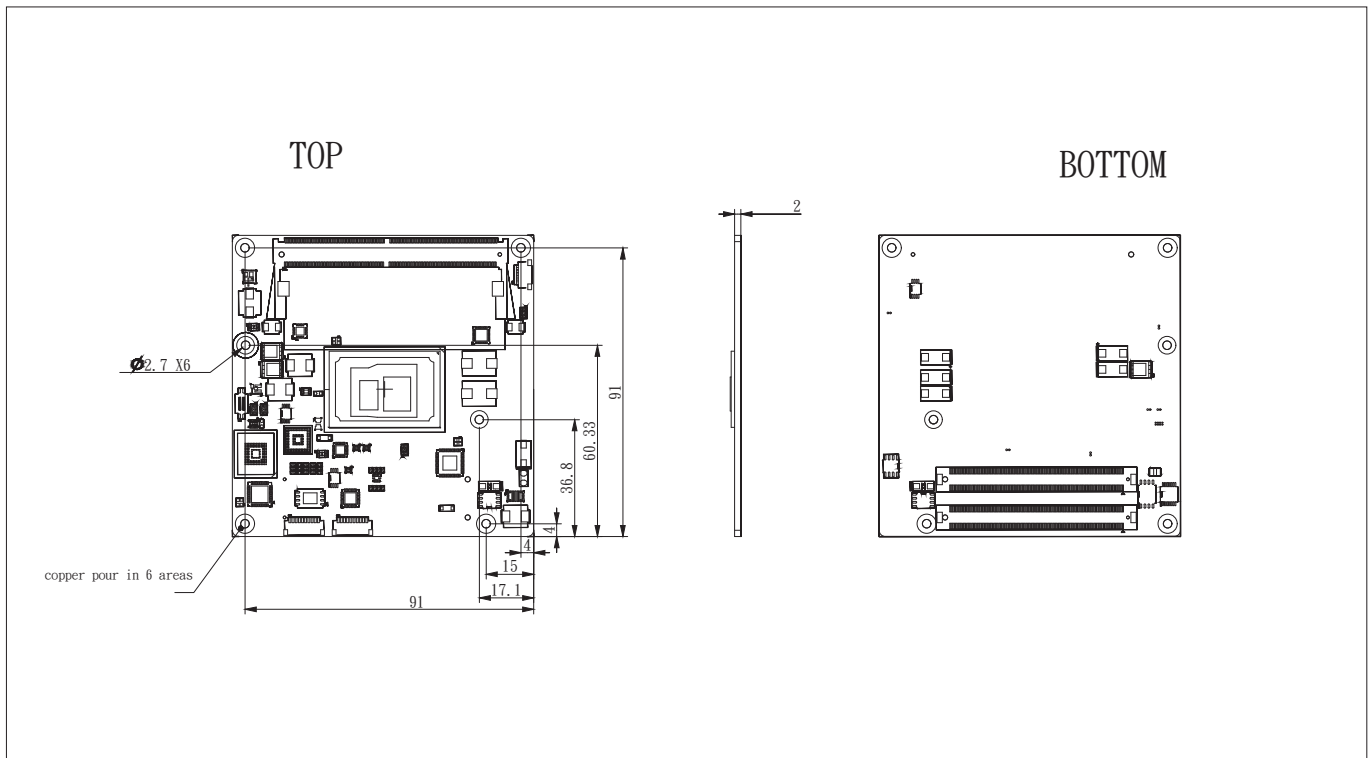


Ordering Information

P/N	CPU	PCH	LVDS/eDP	TPM	Memory	Storage	Operating Temp.	Thermal Solution
ESM-ASLC-X13RE-A1R	Intel® Atom® SoC Processor x7213RE	NA	LVDS/eDP	Onboard TPM 2.0	1	eMMC 5.1 Up to 128GB (Optional)	-40 ~ 80°C (-40°F ~ 176°F)	ACC-ESMASLC-CL-1R
ESM-ASLC-X33RE-A1R	Intel® Atom® SoC Processor x7433RE	NA	LVDS/eDP	Onboard TPM 2.0	1	eMMC 5.1 Up to 128GB (Optional)	-40 ~ 80°C (-40°F ~ 176°F)	ACC-ESMASLC-CL-1R
ESM-ASLC-X35RE-A1R	Intel® Atom® SoC Processor x7835RE	NA	LVDS/eDP	Onboard TPM 2.0	1	eMMC 5.1 Up to 128GB (Optional)	-40 ~ 80°C (-40°F ~ 176°F)	ACC-ESMASLC-CL-1R

I/O Overview

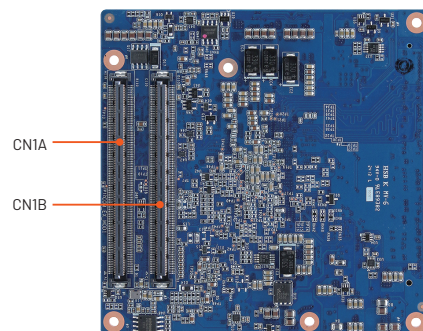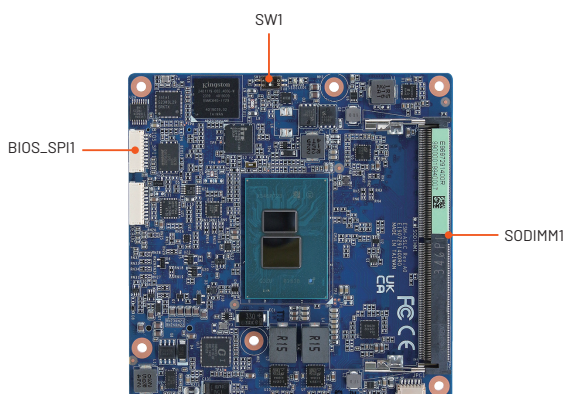

Block Diagram

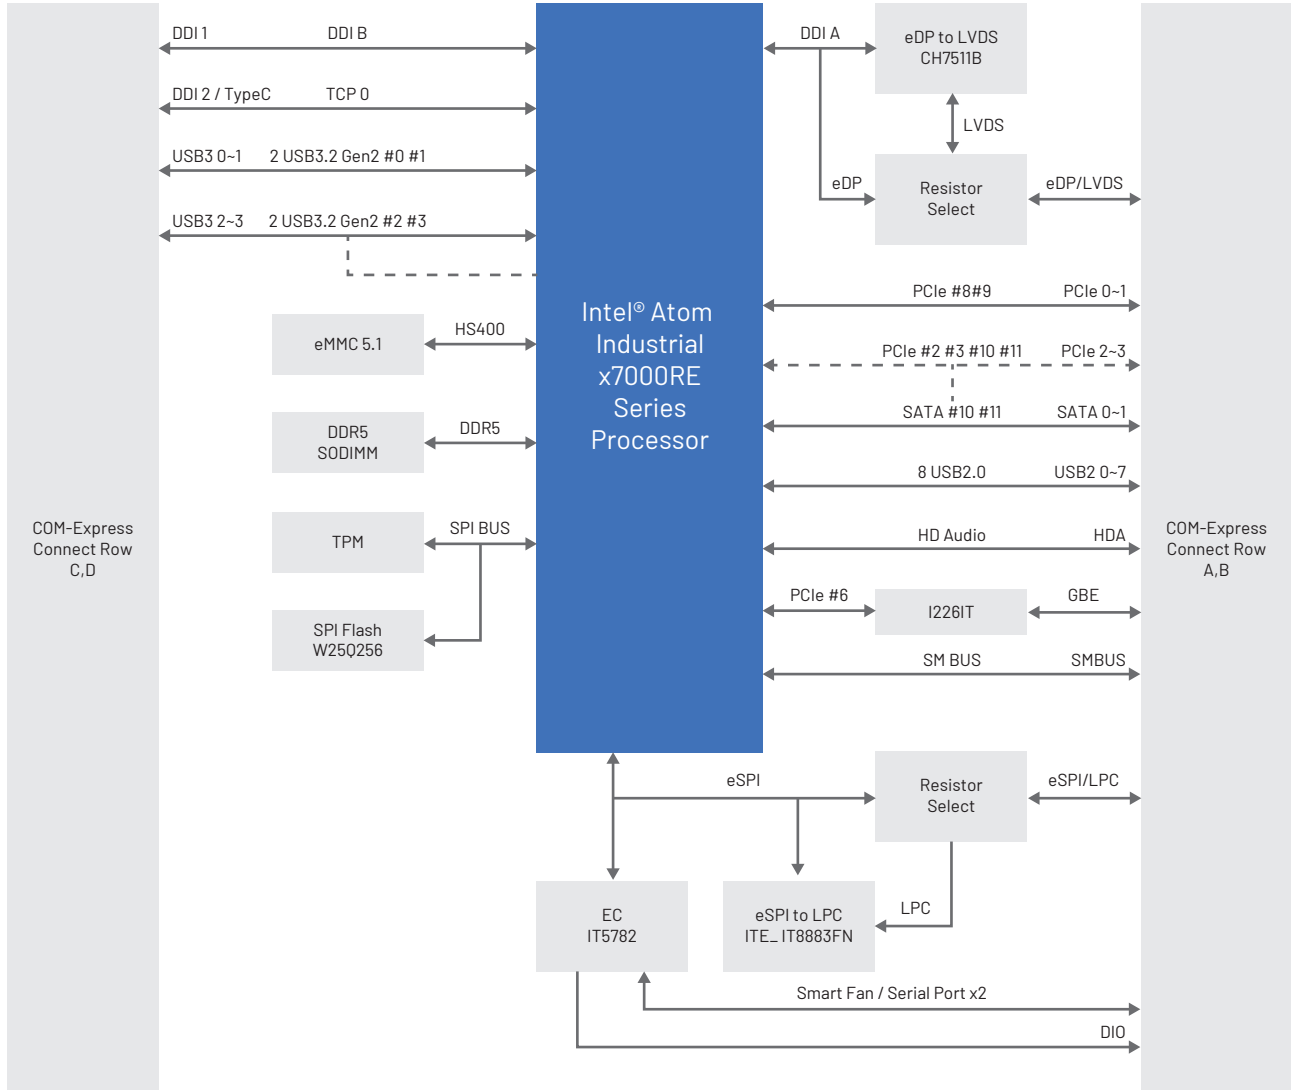

	ME1	ME2	ME3
	BOM 1	BOM 2	BOM 3
CPU Lane#	Function	Function	Function
0	USB0	USB0	USB0
1	USB1	USB1	USB1
2	PCIe2	USB2	USB2
3	PCIe3	USB3	USB3
6	I226		
8	PCIe0	PCIeX4 (0~3)	PCIe0
9	PCIe1		PCIe1
10	SATA0		SATA0
11	SATA1		SATA1