

HPS-ERSUTA

Tower Workstation supports Single 4th/5th Generation Intel® Xeon® Scalable Processor with Intel® C741 Chipset, 1300W, 5x RJ-45, IPMI2.0



Features

- Tower Chassis
- 340mm (W) x 488mm (H) x 528mm (D) with external handles & pedestal stand
- 1 x 1300W PS2 ATX PSU
- 3 x Front accessible 2.5" storage bays
- Intel LGA4677 Socket supports 4th/5th Generation Intel® Xeon® Scalable Processor (Max. TDP at 270W)
- Intel® C741 Chipset
- 6 x DDR5 5600 MHz RDIMM up to 1.5TB
- IPMI 2.0 with AST 2600 BMC controller onboard
- 1 x Intel I210AT 1GbE controller
- 1 x Intel I226-LM 2.5GbE controller
- 1 x Intel X550AT2 10GbE controller supports 2 x 10GbE Ethernet ports



4th/5th Gen.
Intel® Xeon®
Scalable
Processor



6 x DDR5
RDIMM
5600MHz



IPMI 2.0
Supported



10GbE



PCIe Gen5
Multiple
Expansion

Specifications

System Information

Processor	Intel LGA4677 Socket supports 4th/5th Generation Intel® Xeon® Scalable Processor (Max. TDP at 270W)
Platform Controller Hub	Intel® C741 Chipset
System Memory	6 x DDR5 5600 MHz RDIMM up to 1.5TB
BIOS	AMI UEFI BIOS
Watchdog Timer	System reset event 0 ~ 6553 seconds
H/W Status Monitor	CPU temperature Fan speed and voltage monitoring Fan speed control Case open detection
TPM	TPM 2.0 onboard
IPMI	IPMI 2.0 with AST 2600 BMC controller onboard
SBC	HPM-ERSUA

Front I/O

USB	2 x USB 3.2 Gen1 ports
Power Button	1 x Power button
Reset Button	1 x Reset button
LED Indicator	1 x Power status indicator 1 x Disk activity indicator 1 x Network activity indicator

Rear I/O

USB	4 x USB 3.2 Gen1 ports 2 x USB 2.0 type A ports
COM Port	1 x RS232 port
VGA	1 x VGA port
RJ-45	5 x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shares with IPMI access LAN2 port for 2.5GbE LAN3 and 4 ports for 10GbE

Display

Graphic Chipset	AST 2600 BMC controller
Resolution	1 x VGA port VGA: 1920 x 1200 @ 60Hz 32bpp

Power Requirement

Power Supply Unit	1 x 1300W PS2 ATX PSU
-------------------	-----------------------

Expansion

Expansion	4 x PCIe Gen5 x16 slots and 3 x PCIe Gen5 x4 slots Slot 1, PCIe 5.0 x16 Slot 2, PCIe 5.0 x4 Slot 3, PCIe 5.0 x16 Slot 4, PCIe 5.0 x4 Slot 5, PCIe 5.0 x16 Slot 6, PCIe 5.0 x4 Slot 7, PCIe 5.0 x16 (Slot 7 is the slot closest to CPU)
-----------	---

Storage

M.2	1 x M.2 M-Key PCIe 3.0 x4 NVMe SSD, 2242/2260/2280/22110 form factor
-----	--

2.5 Drive Bay	3 x Front accessible 2.5" storage bays
---------------	--

Ethernet

LAN Chipset	1 x Intel I210AT 1GbE controller 1 x Intel I226-LM 2.5GbE controller 1 x Intel X550AT2 10GbE controller supports 2 x 10GbE Ethernet ports
-------------	---

LAN Port	5 x RJ45 MGMT port for dedicated IPMI access only LAN1 port for 1GbE shares with IPMI access LAN2 port for 2.5GbE LAN3 and 4 ports for 10GbE
----------	--

Mechanical & Environmental

Operating Temp.	0 ~ 35°C (L6 system)
Storage Temp.	-40°C 24hrs IEC60068-2-1 Cold test Test: Ab 70°C/ RH95% 24hrs IEC 60068-2-3 Test: Ca
Operating Humidity	35°C @95% Relative Humidity, Non-condensing
Weight	19.7KG
Dimension (W x L x D)	Tower Chassis 340mm (W) x 488mm (H) x 528mm (D) with external handles & pedestal stand 174.8mm (W) x 430mm (H) x 528mm (D) without external handles & pedestal stand


Software Support

OS	Windows 10 IoT Enterprise LTSC 2021 Windows Server IoT 2019 with VT-d disabled Windows Server IoT 2022 Ubuntu 21.10, 22.04 LTS or later Red Hat Enterprise Linux (RHEL) 8.2 and later
----	---

HPS-ERSUTA

Tower Workstation supports Single 4th/5th Generation Intel® Xeon® Scalable Processor with Intel® C741 Chipset, 1300W, 5x RJ-45, IPMI2.0

Mechanical Drawing

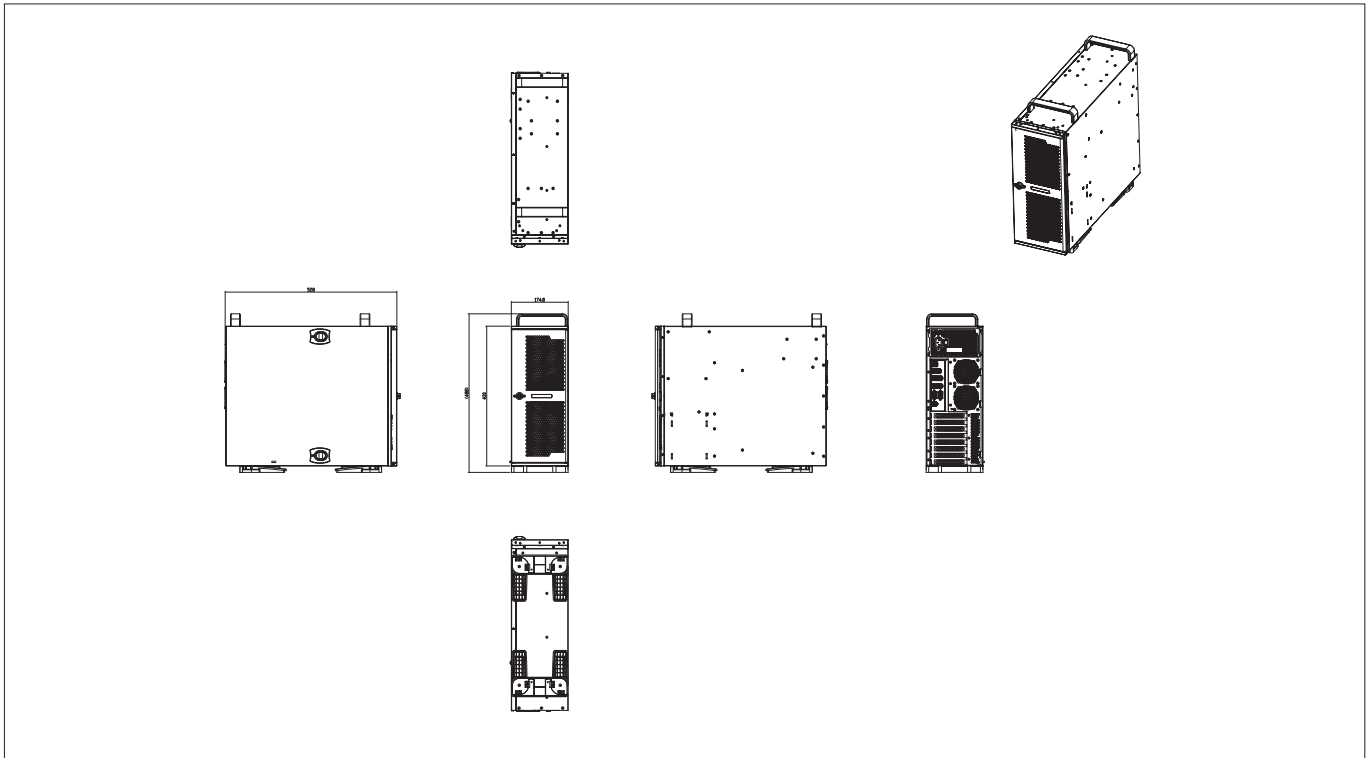

Ordering Information

P/N	CPU	Chipset	Memory	PCIe Slot	10 GbE	2.5 GbE	1GbE	1GbE	USB 3.2 Gen1	USB 2.0	2.5" Drive Bay	PSU	TPM 2.0	RS-232
HPS-ERSUTAD-A1R	1	C741	6	7	2	1	1	1	6	2	3	1300W PS2 ATX	1	1

Packing List

Item	P/N	Quantity
L6 Tower Workstation w/HPM-ERSUAA/1300W	HPS-ERSUTAD-A1R	1
LGA4677 CPU carrier-E1B	E199TR00063R	1


Optional Items

Item	P/N
CPU Cooler for LGA4677 4U 4500RPM 350W	BCC-FAN-467-01R
US Power Cord 1.8M	E170P060390R
EU Power Cord 1.8M	E1702031000R
UK Power Cord 1.8M	E170P060380R
JP Power Cord 1.8M	E170P060410R

HPS-ERSUTA

Tower Workstation supports Single 4th/5th Generation Intel® Xeon® Scalable Processor with Intel® C741 Chipset, 1300W, 5x RJ-45, IPMI2.0

I/O Overview

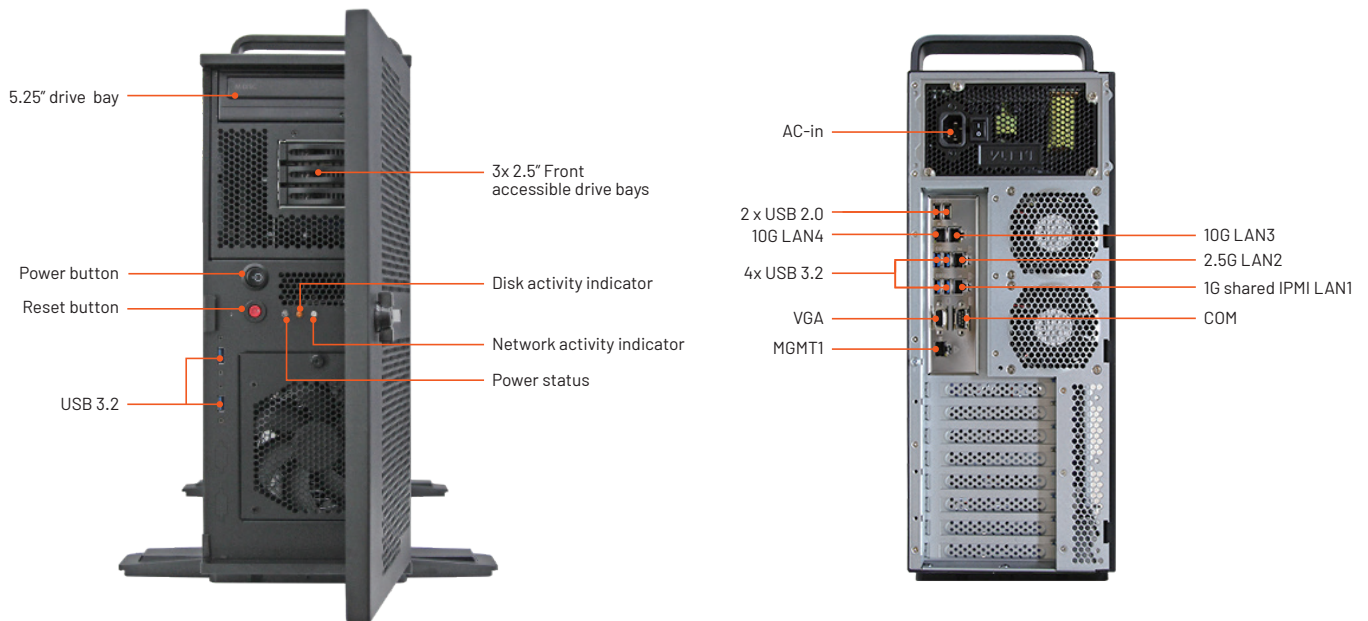

CPU Support List (HPC Only)

SKU	Launch Date	# of Cores	# of Threads	Processor Base Frequency	Max Turbo Frequency	TDP (W)
Intel® Xeon® Gold 6548Y+	Q4,23	32	64	2.5 GHz	4.1 GHz	250
Intel® Xeon® Gold 6526Y	Q4,23	16	32	2.8 GHz	3.9 GHz	195
Intel® Xeon® Gold 5515+	Q4,23	8	16	3.2 GHz	4.1 GHz	165
Intel® Xeon® Gold 6530	Q4,23	32	64	2.1 GHz	4.0 GHz	270
Intel® Xeon® Gold 5520+	Q4,23	28	56	2.2 GHz	4.0 GHz	205
Intel® Xeon® Silver 4516Y+	Q4,23	24	48	2.2 GHz	3.7 GHz	185
Intel® Xeon® Silver 4514Y	Q4,23	16	32	2.0 GHz	3.4 GHz	150
Intel® Xeon® Silver 4510	Q4,23	12	24	2.4 GHz	4.1 GHz	150
Intel® Xeon® Silver 4509Y	Q4,23	8	16	2.6 GHz	4.1 GHz	125
Intel® Xeon® Silver 4510T	Q4,23	12	24	2.0 GHz	3.7 GHz	115
Intel® Xeon® Bronze 3508U	Q4,23	8	8	2.1 GHz	2.2 GHz	125
Intel® Xeon® Gold 6448Y	Q1,23	32	64	2.1 GHz	4.1 GHz	225
Intel® Xeon® Gold 6426Y	Q1,23	16	32	2.5 GHz	4.1 GHz	185
Intel® Xeon® Gold 6418H	Q1,23	24	48	2.1 GHz	4.0 GHz	185
Intel® Xeon® Gold 5415+	Q1,23	8	16	2.9 GHz	4.1 GHz	150
Intel® Xeon® Gold 5420+	Q1,23	28	56	2.0 GHz	4.1 GHz	205
Intel® Xeon® Gold 5418Y	Q1,23	24	48	2.0 GHz	3.8 GHz	185
Intel® Xeon® Silver 4416+	Q1,23	20	40	2.0 GHz	3.9 GHz	165
Intel® Xeon® Silver 4410Y	Q1,23	12	24	2.0 GHz	3.9 GHz	150
Intel® Xeon® Silver 4410T	Q1,23	10	20	2.7 GHz	4.0 GHz	150
Intel® Xeon® Bronze 3408U	Q1,23	8	8	1.8 GHz	1.9 GHz	125
Intel® Xeon® Gold 6430	Q1,23	32	64	2.10 GHz	3.40 GHz	270