OFP-15W33

15.6" Open Frame Panel PC

Quick Reference Guide

4th Ed – 16 December 2024

Copyright Notice

Copyright © 2024 Avalue Technology Inc., ALL RIGHTS RESERVED.

Part No. E2017O153A5R

Declaration of Conformity



This device complies with part 15 fcc rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a class "a" digital device, pursuant to part 15 of the fcc rules.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CE statement

The product(s) described in this manual complies with all application European Union (CE) directives if it has a CE marking. For computer systems to remain CE compliant, only CE-compliant parts may be used. Maintaining CE compliance also requires proper cable and cabling techniques.

Notice

This guide is designed for experienced users to setup the system within the shortest time. For detailed information, please always refer to the electronic user's manual.

Copyright Notice

© 2024 by Avalue Technology Inc. All rights are reserved. No parts of this manual may be copied, modified, or reproduced in any form or by any means for commercial use without the prior written permission of Avalue Technology Inc. All information and specification provided in this manual are for reference only and remain subject to change without prior notice.

Acknowledgements

Intel and Pentium are trademarks of Intel Corporation.

Microsoft Windows is registered trademark of Microsoft Corp.

All other product names or trademarks are properties of their respective owners.

Disclaimer

This manual is intended to be used as a practical and informative guide only and is subject

to change without notice. It does not represent a commitment on the part of Avalue. This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

A Message to the Customer

Avalue Customer Services

Each and every Avalue's product is built to the most exacting specifications to ensure reliable performance in the harsh and demanding conditions typical of industrial environments. Whether your new Avalue device is destined for the laboratory or the factory floor, you can be assured that your product will provide the reliability and ease of operation for which the name Avalue has come to be known.

Your satisfaction is our primary concern. Here is a guide to Avalue's customer services. To ensure you get the full benefit of our services, please follow the instructions below carefully.

Technical Support and Assistance

1. Visit the Avalue website at https://www.avalue.com/ where you can find the latest information about the product.
2. Contact your distributor or our technical support team or sales representative for technical support if you need additional assistance. Please have following information ready before you call:

- Product name and serial number
- Description of your peripheral attachments
- Description of your software (operating system, version, application software, etc.)
- A complete description of the problem
- The exact wording of any error messages

To receive the latest version of the user's manual; please visit our Web site at:
www.avalue.com

Product Warranty (Returns & Warranties policy)

1. Purpose

Avalue establishes the following maintenance specifications and operation procedures for providing the best quality of service and shortened repair time to our customers.

2. Warranty

2.1 Warranty Period

Avalue endeavors to offer customers the most comprehensive post-sales services and protection; besides offering a 2-year warranty for standard Avalue products, an extended warranty service can also be provided based on additional request from the customer. Within the warranty period, customers are entitled to receive comprehensive and prompt repair and warranty.

Standard products manufactured by Avalue are offered a 2-year warranty, from the date of delivery from Avalue. For ODM/OEM products manufactured by Avalue or PCBA with conformal coating, will follow up the define warranty of the agreement, otherwise will be offered 1-year warranty for ODM/OEM products but non-warranty for PCBA with conformal coating. For outsourcing parts kit by Avalue (ex: Motherboard, LCD touch panel, CPU, RAM, HDD) are offered a 6-month warranty, and Mobile/Tablet PC battery are offered a warranty of the half year, from the date of delivery by Avalue. Products before the mass production stage, i.e. engineering samples are not applied in this warranty or service policy. For extended warranty and cross-territory services, product defects resulting from design, production process or material are covered by the pre-set warranty period after the date of delivery from Avalue. For non-Avalue products, the product warranty and repair time shall be based on the service standards provided by the original manufacturer; in principle Avalue will provide these products a warranty service for no more than one year.

2.2 Maintenance services within the warranty period

In the case of Avalue product DOA (Defect-on-Arrival) when the customer finds any defect within 1 month after the delivery, Avalue will replace it with a new product in a soonest way. Except for custom products, once the customer is approved of a Cross-Shipment Agreement, which allows for delivery a new product to the customer before receiving the defective one, Avalue will immediately proceed with new product replacement for the said DOA case. On validation of the confirmed defect, Avalue is entitled to reserve the right whether to provide a new product for replacement. For the returned defective new product, it is necessary to verify that there shall be no bruise, alteration, scratch or marking to the appearance, and that none of the delivered accessories missing; otherwise, the customer will be requested to pay a processing fee. On the other hand, if the new product defect is resulting from incorrect configuration or erroneous use by the user instead of any problem of the hardware itself, the customer will also be requested to pay for relevant handling fees.

As for other conditions, Avalue will handle defects by way of repair. The customer will be requested to send the defective product to an Avalue authorized service center, and Avalue will return the repaired product back to the customer as soon as possible.

2.3 Ruling of an out-of-warranty defect

The following situations are not included in the warranty:

- The warranty period has expired.
- Product has been altered or its label of the serial number has been torn off.
- Product functionality issues resulting from improper use by the user, unauthorized dismantle or alteration, unfit operation environment, improper maintenance, accident or other causes. Avalue reserves the right for the ruling of the aforementioned situations.
- Product damage resulting from lightning, flood, earthquake or other calamities.
- The warranty rules of non-Avalue products and accessories shall be in accordance with standards set up by the original manufacturer. These products and accessories include RAM, HDD, FDD, CD-ROM, CPU, FAN, etc.
- Product upgrade request or test request submitted by the customer after expiration of the warranty.
- PCBA with conformal coating.
- Avalue semi-product and outsourced products without Avalue serial number.
- Products before the mass production stage, i.e. engineering samples.

3. Procedure for sending for repair

3.1 Attain a RMA number

A customer’s rejected product returned for repair shall have a RMA (Return Merchandise Authorization) number. Without a RMA number, Avalue will not provide any repair service for the rejected product, and the product will be returned to the customer at customer’s cost. Avalue will not issue any notice for the return of the product.

Each returned product for repair shall have a RMA number, which is simply the authorization of the return for repair; it is not a guarantee that the returned goods can be repaired or replaced. For applying for a RMA number, the customer may enter the eRMA webpage of Avalue https://www.avalue.com/en/member and log-in with an account number and a password authorized by Avalue. The system will then automatically issue a RMA number.

When applying for the RMA number, it is essential to fill in basic information of the customer and the product, together with detailed description of the problem encountered. If possible, avoid using ambiguous words such as “does not work” or “problematic”. Without a substantial description of the problem, it is hard to start the repair and will cause prolonged repair time. Lacking detailed statement of fault steps also makes the problem hard to be identified, sometimes resulting in second-time repairs.

In case the customer can't define the cause of problem, please contact Avalue application engineers. Sometimes when the problem can be resolved even before the customer sends back the product.
On the other hand, if the customer only returns the key parts to Avalue for repair, it is necessary that the serial number of the entire unit is given in the "Problem Description" field, so that warranty period can be ruled accordingly; or Avalue will handle the case as an Out-of- warranty case.

3.2 Return of faulty product for repair

It is recommended that the customer not to return the accessories (manual, connection cables, etc.) with the products for repair, devices such as CPU, DRAM, CF memory card, etc., shall also be removed from the faulty goods before return for repair. If these devices are relevant to described repair problems and necessary to be returned with the goods; please clearly indicate the items included in the eRMA application form. Avalue shall not be responsible for any item that is not itemized. Moreover, make sure the problem(s) are detailed in the "Problem Description" field.
In the list of delivery, the customer may fill-in a value which is lower than the actual value, to prevent customs levying a higher tax over the excessive value of the return goods. The customer shall be held responsible for extra fees caused by this. We strongly recommend that "Invoice for customs purpose only with no commercial value" be indicated on the delivery note. Also for the purpose of expedited handling, please printout the RMA number and put it in the carton, also indicate the number outside of the carton, with the recipient addressing to Avalue RMA Department.
When returning the defective product, please use an anti-static bag or ESD material to pack it properly. In case of improper packing resulting in damages in the transportation process, Avalue reserves the right to reject the un-repaired faulty good at the customer's costs. Furthermore, it is suggested that the faulty goods shall be sent via a door-to-door courier service. The customer shall be held responsible for any customs clearance fee or extra expenses if Air-Cargo is used for the delivery.
In case of a DOA situation of a new product, Avalue will be responsible for the product and the freight. If the faulty goods are within the warranty period, the sender will take responsibility for the freight. For an out-of-warranty case, the customer shall be responsible for the freight of both trips.

3.3 Maintenance Charge

Avalue will charge a moderate repair fee for the following conditions:

- The warranty period has expired.
- Product has been altered or its label of the serial number has been torn off.
- Product functionality issues resulting from improper use by the user, unauthorized dismantle or alteration, unfit operation environment, improper maintenance, accident

or other causes. Avalue reserves the right for the ruling of the aforementioned situations.

- Product damage resulting from lightning, flood, earthquake or other calamities.
- The warranty rules for non-Avalue products and accessories shall be in accordance with standards set up by the original supplier. These products and accessories include RAM, HDD, FDD, CD-ROM, CPU, FAN, etc.
- Product upgrade request or test request submitted by the customer after expiry of the warranty.
- PCBA with conformal coating.
- Avalue semi-product and outsourced products without Avalue serial number
- Products before the mass production stage, i.e. engineering samples.
- In case the products received are examined as NPF (No Problem Found) within the warranty period, the customer shall be responsible for the freight of both trips.
- Please contact your local distributor to examine in advance to prevent unnecessary freight cost.

For system failure of out-of-warranty products, Avalue will provide a quotation prior to repair service. When the customer applies for the cost, please refer to the Quotation number. In case the customer does not return the DOA product that has already been replaced by a new one, or the customer does not sign back the quotation of the out-of-warranty maintenance, Avalue reserves the right of whether or not to provide the repair service. In case the customer does not reply in 3 months, Avalue shall directly scrap or return the product back to customer at customer's cost without further notice to the customer.

3.4 Maintenance service of phased-out products

For servicing phased-out products, Avalue provides an extended period, starting the date of phase-out, as a guaranteed maintenance period of such products, for continuance of the maintenance service to meet customer's requirements. In case of unexpected factors causing Avalue to be unable to repair/replace a warranted but phased-out product, Avalue will, depending on the availability, upgrade the product (free of charge with continued warranty period as of the original product), or, give partial refund (based on the length of the remaining warranty period) to solve this kind of problem.

3.5 Maintenance Report

On completion of repair of a defective product, a Maintenance Report indicating the maintenance result and part(s) replaced (if any) will be sent to the customer together with the product. If the customer demands an additional maintenance analysis report, a service fee of various level will be charged depending on the warranty status. In case the analysis result shows that the defect attributes to Avalue's faulty design or process, the analysis fee will be exempted.

4. Service Products

Avalue provides service products to manage with different customer needs. Should you have any need, please consult to Avalue Sales Department.

Defect Analysis Report (DAR)

Avalue provides DAR (Defect Analysis Report) services aiming to elevating customer satisfaction. A DAR includes defect cause identification/verification/suggestion and improvement precautions, with instructions on correct usage for the avoidance of any reoccurrence.

Upgrade Service

Avalue is capable to provide system upgrade service for customization requirements. This upgrade service is applicable for main parts, such as CPU, memory, HDD, SSD, storage devices; also replacements motherboards of systems. Please contact Avalue sales for details to evaluate the possibility of system upgrade service and obtain information of lead time and price.

Safety Instructions

Safety Precautions

Before installing and using this device, please note the following precautions.

1. Read these safety instructions carefully.
2. Keep this User's Manual for future reference.
3. Disconnected this equipment from any AC outlet before cleaning.
4. For plug-in equipment, the power outlet socket must be located near the equipment and must be easily accessible.
5. Keep this equipment away from humidity.
6. Put this equipment on a reliable surface during installation. Dropping it or letting it fall may cause damage.
7. Make sure the voltage of the power source is correct before connecting the equipment to the power outlet.
8. Use a power cord that has been approved for using with the product and that it matches the voltage and current marked on the product's electrical range label. The voltage and current rating of the cord must be greater than the voltage and current rating marked on the product.
9. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to

avoid damage by transient overvoltage.

12. Never pour any liquid into an opening. This may cause fire or electrical shock.

13. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel. If one of the following situations arises, get the equipment checked by service personnel:

- The power cord or plug is damaged.
- Liquid has penetrated into the equipment.
- The equipment has been exposed to moisture.
- The equipment does not work well, or you cannot get it work according to the user's manual.
- The equipment has been dropped and damaged.
- The equipment has obvious signs of breakage.

14. CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer.

15. Equipment intended only for use in a RESTRICTED ACCESS AREA.

Explanation of Graphical Symbols

	Warning	A WARNING statement provides important information about a potentially hazardous situation which, if not avoided, could result in death or serious injury.
	Caution	A CAUTION statement provides important information about a potentially hazardous situation which, if not avoided, may result in minor or moderate injury to the user or patient or in damage to the equipment or other property.
	Note	A NOTE provides additional information intended to avoid inconveniences during operation.
		Direct current.
		Alternating current
		Stand-by, Power on
		FCC Certification
		CE Certification
		Follow the national requirements for disposal of equipment.
		Stacking layer limit
		This side up

		Fragile Packaging
		Beware of water damage, moisture-proof
		Carton recyclable
		Handle with care
		Follow operating instructions of consult instructions for use.

Disposing of your old product

WARNING:
There is danger of explosion if the battery is mishandled or incorretly replaced. Replace only with the same type of battery. Do not disassemble it or attempt to recharge it outside the system. Do not crush, puncture, dispose of in fire, short the external contacts, or expose to water or ther liquids. Dispose of the battery in accordance with local regulations and instructions from your service provider.

CAUTION:
- Lithium Battery Caution: Danger of explosion if battery is incorrectly replaced. Replace only with same or equivalent type. Dispose batteries according to manufacturer's instructions.
- Disposal of a BATTERY into fire or a hot oven, or mechanically crushing or cutting of a BATTERY, that can result in an EXPLOSION
- Leaving a BATTERY in an extremely high temperature surrounding environment that can result in an EXPLOSION or the leakage of flammable liquid or gas.
- A BATTERY subjected to extremely low air pressure that may result in an EXPLOSION or the leakage of flammable liquid or gas.

Mise en garde!
AVERTISSEMENT : Il existe un risque d'explosion si la batterie est mal manipulée ou remplacée de manière incorrecte. Remplacez uniquement par le même type de batterie. Ne le démontez pas et ne tentez pas de le recharger en dehors du système. Ne pas écraser, percer, jeter au feu, court-circuiter les contacts externes ou exposer à l'eau ou à d'autres liquides. Jetez la batterie conformément aux réglementations locales et aux instructions de votre fournisseur de services.

MISE EN GARDE:
- Pile au lithium Attention : Danger d'explosion si la pile n'est pas remplacée correctement. Remplacer uniquement par un type identique ou équivalent. Jetez les piles conformément aux instructions du fabricant.
- L'élimination d'une BATTERIE dans le feu ou dans un four chaud, ou l'écrasement ou le découpage mécanique d'une BATTERIE, pouvant entraîner une EXPLOSION
- Laisser une BATTERIE dans un environnement à température extrêmement élevée pouvant entraîner une EXPLOSION ou une fuite de liquide ou de gaz inflammable.
- UNE BATTERIE soumise à une pression d'air extrêmement basse pouvant entraîner une EXPLOSION ou une fuite de liquide ou de gaz inflammable.

Content

1. Getting Started 16
1.1 Safety Precautions 16
1.2 Packing List 16
1.3 System Specifications 18
1.4 System Overview 21
1.4.1 Right View 21
1.4.2 Left View 21
1.4.3 Bottom View 21
1.5 System Dimensions 22
1.5.1 Front and Rear side 22
1.6 Panel Mounting 23
1.7 Wall Mounting 34
2. Hardware Configuration 44
2.1 OFP-15W33 connector mapping 45
2.1.1 Serial Port connector (COM) 45
2.1.2 DC power-in connector (DC in) 46
2.2 Product Overview 47
2.3 Jumper and Connector List 49
2.4 Setting Jumpers & Connectors 52
2.4.1 Serial port 1/2/3/4/5/6 pin9 signal select (JRI1/JRI2/JRI3/JRI4/JRI5/JRI6) 52
2.4.2 SATA2/MSATA1 mPCIe slot selector (JMSW1) 52
2.4.3 LVDS Back Light power selection (JSBKL1) 53
2.4.4 AT/ATX Power Mode Select (JSATX1) 53
2.4.5 Clear CMOS (CMOS1) 54
2.4.6 LCD Inverter connector (JBKL1) 54
2.4.7 Serial port 1/2 connector (COM1/2) 55
2.4.8 Serial port 3/4/6 connector (COM3/4/6) 55
2.4.9 Serial port 5 connector (COM5) 56
2.4.10 Serial Port 1 RS485/422 Mode connector (JRS485) 56
2.4.11 General purpose I/O connector (DIO1) 57
2.4.12 SATA Power connector 1/2 (SPWR1/2) 57
2.4.13 Power connector (PWR1) 58
2.4.14 USB2.0 connector (USB3) 58
2.4.15 USB2.0 connector (USBH1) 59
2.4.16 USB2.0 connector (USBH2) 59

2.4.17 LVDS connector (LVDS1) 60
2.4.18 Battery connector (BT1) 61
2.4.19 Front Audio connector (FAUD1) 61
2.4.19.1 Signal Description –Front Audio connector (FAUD1) 61
2.4.20 LPC connector (JLPC1) 62
2.4.21 EC_Program (EC1) 62
2.4.22 SPI connector (SPI1) 63
2.4.23 Sony/Philips Digital Interface (SPDIF1) 63
2.4.24 Speaker connector (SPK1) 64
2.4.25 Front Panel connector 1 (FPT1) 64
2.4.26 Front Panel connector 2 (FPT2) 65
2.4.27 LED indicator connector 1 (LED1) 65
2.4.28 LED indicator connector 2 (LED2) 66
2.4.29 CPU fan connector (FAN1) 66
2.4.30 Digital Microphone connector (DMIC1) 67
2.4.31 eDP connector (EDP1) 67
2.4.32 I2C connector (I2C1) 68
3.BIOS Setup 69
3.1 Introduction 70
3.2 Starting Setup 70
3.3 Using Setup 71
3.4 Getting Help 72
3.5 In Case of Problems 72
3.6 BIOS setup 73
3.6.1 Main Menu 73
3.6.1.1 System Language 74
3.6.1.2 System Date 74
3.6.1.3 System Time 74
3.6.2 Advanced Menu 74
3.6.2.1 Trusted Computing 75
3.6.2.2 ACPI Settings 75
3.6.2.3 IT8528 Super IO Configuration 76
3.6.2.3.1 Serial Port 1 Configuration 77
3.6.2.3.2 Serial Port 2 Configuration 78
3.6.2.3.3 Serial Port 3 Configuration 78
3.6.2.3.4 Serial Port 4 Configuration 79
3.6.2.3.5 Serial Port 5 Configuration 79
3.6.2.4 H/W Monitor 80
3.6.2.4.1 Smart Fan Mode Configuration 80
3.6.2.5 S5 RTC Wake Settings 81

3.6.2.6 Serial Port Console Redirection 83
3.6.2.7 CPU Configuration 83
3.6.2.7.1 Socket 0 CPU Information 84
3.6.2.7.2 CPU Power Management Configuration 85
3.6.2.8 Network Stack Configuration 86
3.6.2.9 NVMe Configuration 87
3.6.2.10 CSM Configuration 87
3.6.2.11 USB Configuration 88
3.6.2.12 Security Configuration 89
3.6.2.13 System Component 90
3.6.3 Chipset 90
3.6.3.1 North Bridge 91
3.6.3.2 South Bridge 92
3.6.3.3 Uncore Configuration 92
3.6.3.4 South Cluster Configuration 94
3.6.3.4.1 HD-Audio Configuration 94
3.6.3.4.2 PCI Express Configuration 95
3.6.3.4.2.1 PCI Express Root Port 3(i210/211) 96
3.6.3.4.2.2 PCI Express Root Port 4(i210/211) 97
3.6.3.4.2.3 PCI Express Root Port 5(M.2/PCIe slot) 98
3.6.3.4.2.4 PCI Express Root Port 6(mPCIe) 99
3.6.3.4.3 SATA Drives 100
3.6.3.4.4 SCC Configuration 101
3.6.3.4.5 USB Configuration 101
3.6.4 Security 102
3.6.4.1 Secure Boot 103
3.6.5 Boot 104
3.6.6 Save and exit 105
3.6.6.1 Save Changes and Reset 105
3.6.6.2 Discard Changes and Reset 105
3.6.6.3 Restore Defaults 105
3.6.6.4 Launch EFI Shell from filesystem device 105
4. Drivers Installation 106
4.1 Install Chipset Driver 107
4.2 Install VGA Driver 108
4.3 Install Serial IO Driver 109
4.4 Install TXE Driver 110
4.5 Install Audio Driver (For Realtek ALC662 HD Audio) 111
4.6 Install LAN Driver (For Intel I211AT) 112
5. Development Resource 114

1. Getting Started

1.1 Safety Precautions

Warning!



Always completely disconnect the power cord from your chassis whenever you work with the hardware. Do not make connections while the power is on. Sensitive electronic components can be damaged by sudden power surges. Only experienced electronics personnel should open the PC chassis.

Caution!



Always ground yourself to remove any static charge before touching the CPU card. Modern electronic devices are very sensitive to static electric charges. As a safety precaution, use a grounding wrist strap at all times. Place all electronic components in a static-dissipative surface or static-shielded bag when they are not in the chassis.

1.2 Packing List

Before installation, please ensure all the items listed in the following table are included in the package.

Item	Description	Q'ty
1	OFP-15W33 Open Frame Panel PC	1
2	Screws for VESA	4



If any of the above items is damaged or missing, contact your retailer.

Purposes and Applications

OFP-15W33 is used the Intel® Celeron® series (Apollo Lake platform), which has stronger performance and lower power consumption. it also inherits from OFP-series strength, Modularized, Flexible Expansion, Reliability and Stability.
OFP series have been passed stricter vibration and shock testing. It can be used on extreme environment like manufacture or factory. Typical applications are HMI, Automation, POI, KIOSK.
It also can be suitable for the customer's various application and scenario that need more ruggedized, vibration and water/dust-proof environment(IP65 Front Panel, IP41 Rear (except I/O)).

Unpacking

Note:
If any of the components listed in the checklist below are missing, do not proceed with the installation. Contact the Avalue reseller or vendor the product was purchased from or contact an Avalue sales representative directly by sending an email to sales@avalue.com

To unpack the flat bezel panel PC, follow the steps below.
WARNING!
The front side LCD screen has a protective plastic cover stuck to the screen. Only remove the plastic cover after the fiat bezel panel PC has been properly installed. This ensures the screen is protected during the installation process.

Step 1: Carefully cut the tape sealing the box. Only cut deep enough to break the tape.
Step 2: Open the outside box.
Step 3: Carefully cut the tape sealing the box. Only cut deep enough to break the tape.
Step 4: Open the inside box.
Step 5: Lift the panel PC out of the boxes.
Step 6: Remove the peripheral parts box from the main box.

1.3 System Specifications

Board Specification	
Mother Board	EMX-APLP (EMX-APLP-34-A1-01R(eDP Ver))
CPU	Intel® Celeron® J3455 (F1 stepping)
CPU Cooler (Type)	Fanless
Memory	2 x 204-pin DDR3L 1600 & 1333MHz SO-DIMM supports up to 16GB
Wireless LAN	IEEE802.11 ac/a/b/g/n 2.4 GHz, 5 GHz (Optional)
Bluetooth	BT4.0 (Optional)
Operating System	Windows 10 Ubuntu 16.04
Expansion Card	1 x full size Mini PCI-e support mSATA (SATA III and mSATA By auto switch IC) with 1 x SIM card slot 1 x M.2 (2230) A-Key, support WiFi module
Storage	
Solid State Drive	N/A (Reserve space for future1 x 2.5” Drive Bay design)
Other Storage Device	Default by 1 x mSATA (Shared mPCIe)
Panel	
LCD Panel	15.6" eDP Panel, BOE NV156FHM-N42 1920*1080 or Innolux N156HCE-EBA 1920*1080
LCD Control Board	Built in
Touch Screen	15.6" PCAP Touch, Henghao: HD-T156WP05-F4SB or ACDC119
External I/O	
Serial Port	1 x RS232(default)/422/485 4 x RS232 (option)
USB Port	4 x USB 3.0, 4 x USB 2.0 (option)
Video Port	DP++, HDMI/DP(HDMI/DP: 3840 x 2160 @ 30Hz, 2560 x 1600 @ 30Hz)
Audio Port	Line-out, Mic-in
LAN Port	2 x RJ45 LAN port (2 x Intel® I211AT, 10/100/1000 Base-Tx Gigabit Ethernet Compatible)
Wireless LAN Antenna	2 x Antenna Mounting with Dust Cover
Switch	2 pins Phoenix connector default for system reset function (option for power on/off) *Do not connect any power source to this connector to avoid damage of

	motherboard
Mechanical	
Power Type	+12V~24V DC in
Power Connector Type	3 pins Phoenix connector and Lockable DC in
Dimension	387 x 235 x 47 mm
Weight	2.5 Kg
Color	Silver
Fanless	Fanless
OS Support	Windows 10 Ubuntu 16.04 Android x86 8.1
Reliability	
EMI Test	CE/FCC Class A
Vibration Test	Random Vibration Operation 1 Test PSD : 0.00454G²/Hz , 1.5 Grms 2 System condition : operation mode 3 Test frequency : 5~500 Hz 4 Test axis : X,Y and Z axis 5 Test time : 30 minutes per each axis 6 IEC60068-2-64 Test Fh 6 Storage : mSATA Sine Vibration test (Non-operation) 1 Test Acceleration : 2G 2 Test frequency : 5~500 Hz 3 Sweep：1 Oct/ per one minute. (logarithmic) 4 Test Axis : X,Y and Z axis 5 Test time :30 min. each axis 6 System condition : Non-Operating mode 7. Reference IEC 60068-2-6 Testing procedures Package Vibration Test: 1 Test PSD : 0.026G²/Hz , 2.16 Grms 2 Test frequency : 5~500 Hz 3 Test axis : X,Y and Z axis 4 Test time : 30 minutes per each axis 5 IEC 60068-2-64 Test Fh
Mechanical Shock Test	1 Wave from : Half Sine wave 2 Acceleration Rate : 10g for operation mode


	3 Duration Time : 11ms 4 No. of shock : Z axis 300 times 5 Test Axis : Z axis 6 operation mode 7 Reference IEC 60068-2-27 testing procedures Test Eb : Shock Test
Drop Test	Package drop test Reference ISTA 2A, Method : IEC-60068-2-32 Test:Ed Test Ea : Drop Test 1 Test phase : One corner, three edges, six faces 2 Test high : 96.5cm 3 Package weight : 5Kg 4 Test drawing 4-feet drop resistance without package MIL-STD-810G
Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Operating Humidity	0% ~ 90% Relative Humidity, Non-condensing
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Power Consumption	Max. load 38.87W with intel J3455/4GB/32GB(mSATA) , 12V DC in




Note: Specifications are subject to change without notice.

1.4 System Overview


1.4.1 Right View

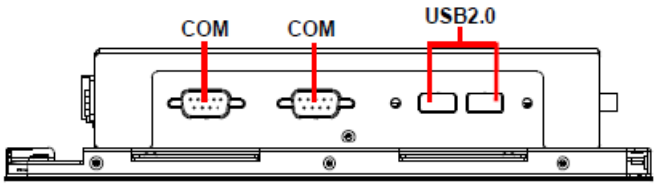

1.4.2 Left View

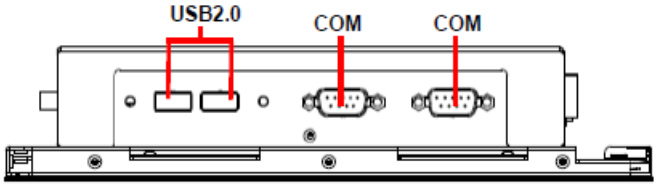

1.4.3 Bottom View

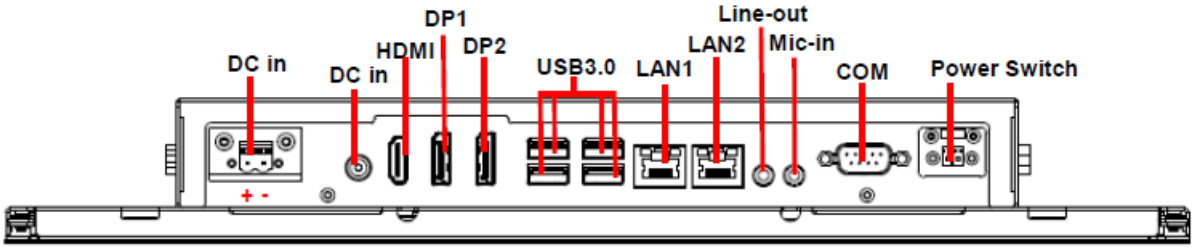


Connectors

Label	Function	Note
COM	5 x Serial port connector	1 x RS232(default)/422/485 4 x RS232(option)
HDMI	HDMI connector	
USB3.0	4 x USB 3.0 connector	
USB2.0	4 x USB 2.0 connector(option)	
LAN1/2	2 x RJ-45 Ethernet	
Line-out	Line-out jack	
Mic-in	Mic-in audio jack	
DC in	DC power-in connector	
DC in	2 pins Phoenix connector	
DP1/2	2 x DP connector	
Power Switch	2 pins Phoenix connector default for system reset function (option for power on/off)	Do not connect any power source to this connector to avoid damage of motherboard

1.5 System Dimensions

1.5.1 Front and Rear side

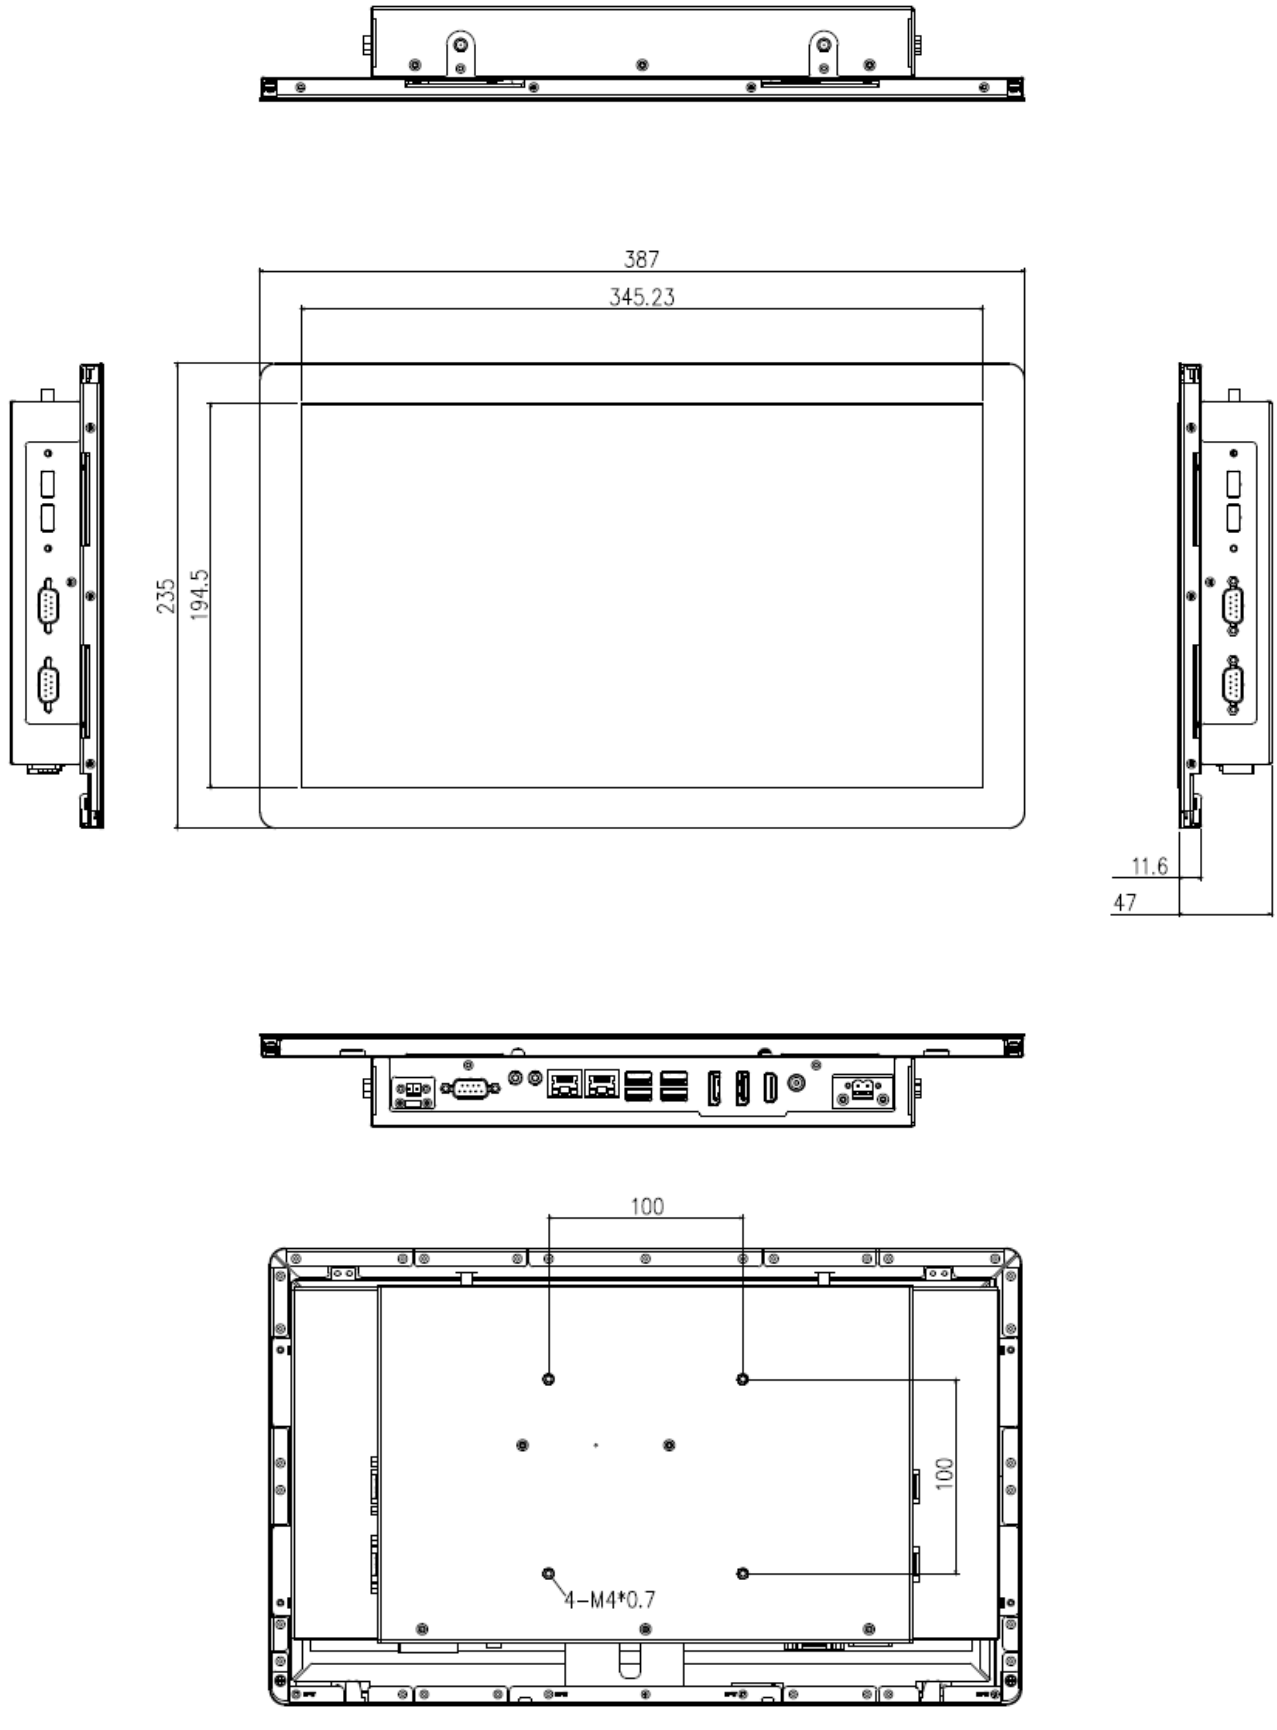


(Unit: mm)


1.6 Panel Mounting

Panel mount is the solution for mounting OFP into the opening of wall (or cabinet).

The dimension of opening is as below:

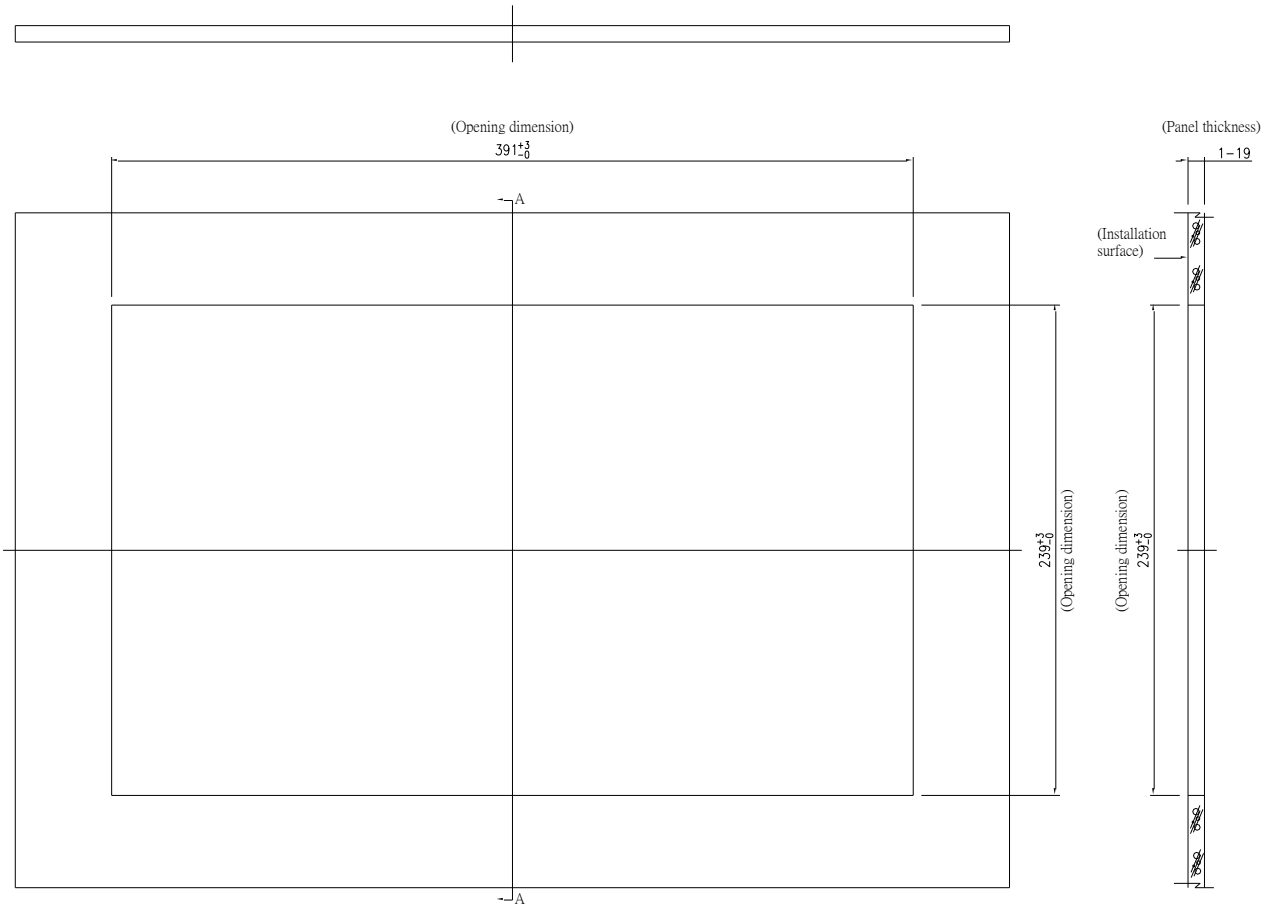


(Unit: mm)

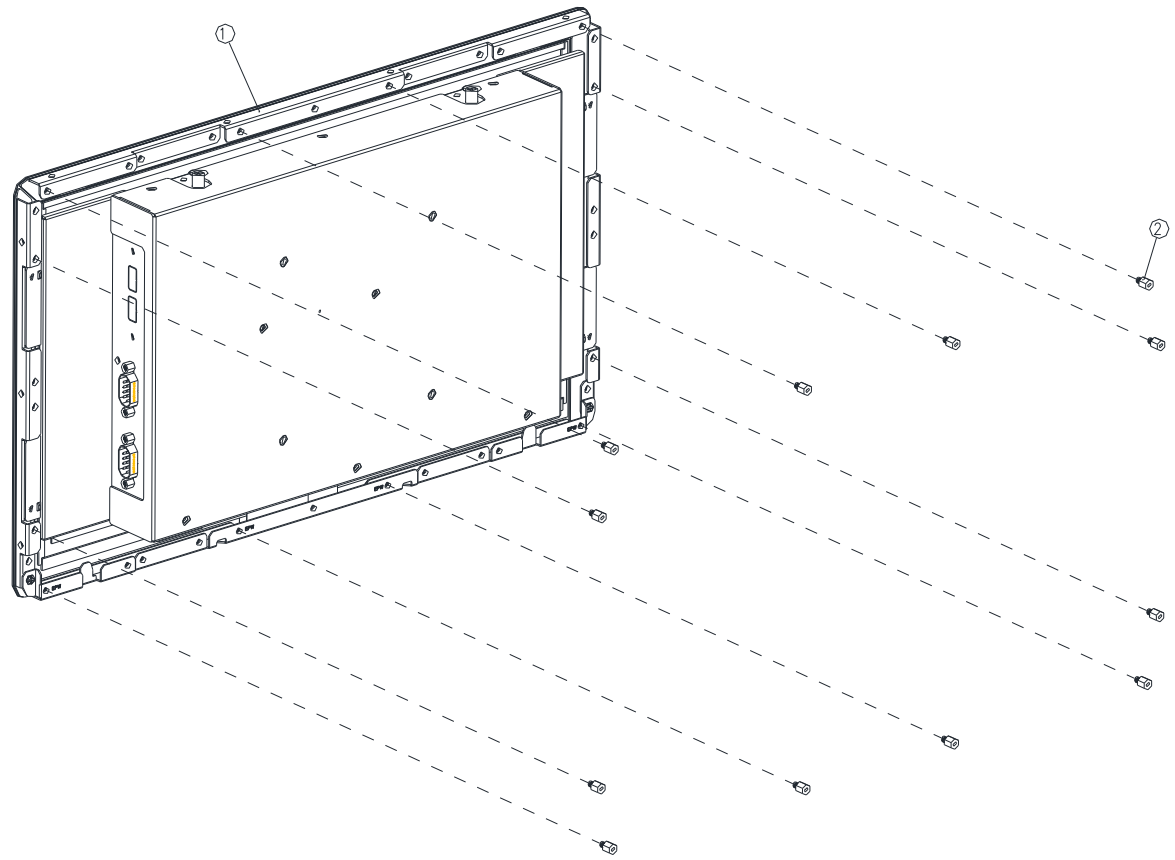


Step1. Insert and fasten 12 pcs Hexagon Studs on each side of the OFP-15W33 Bracket.

2	Hexagon Stud	12
1	OFP-15W33	1
Item	Part Name	Quantity

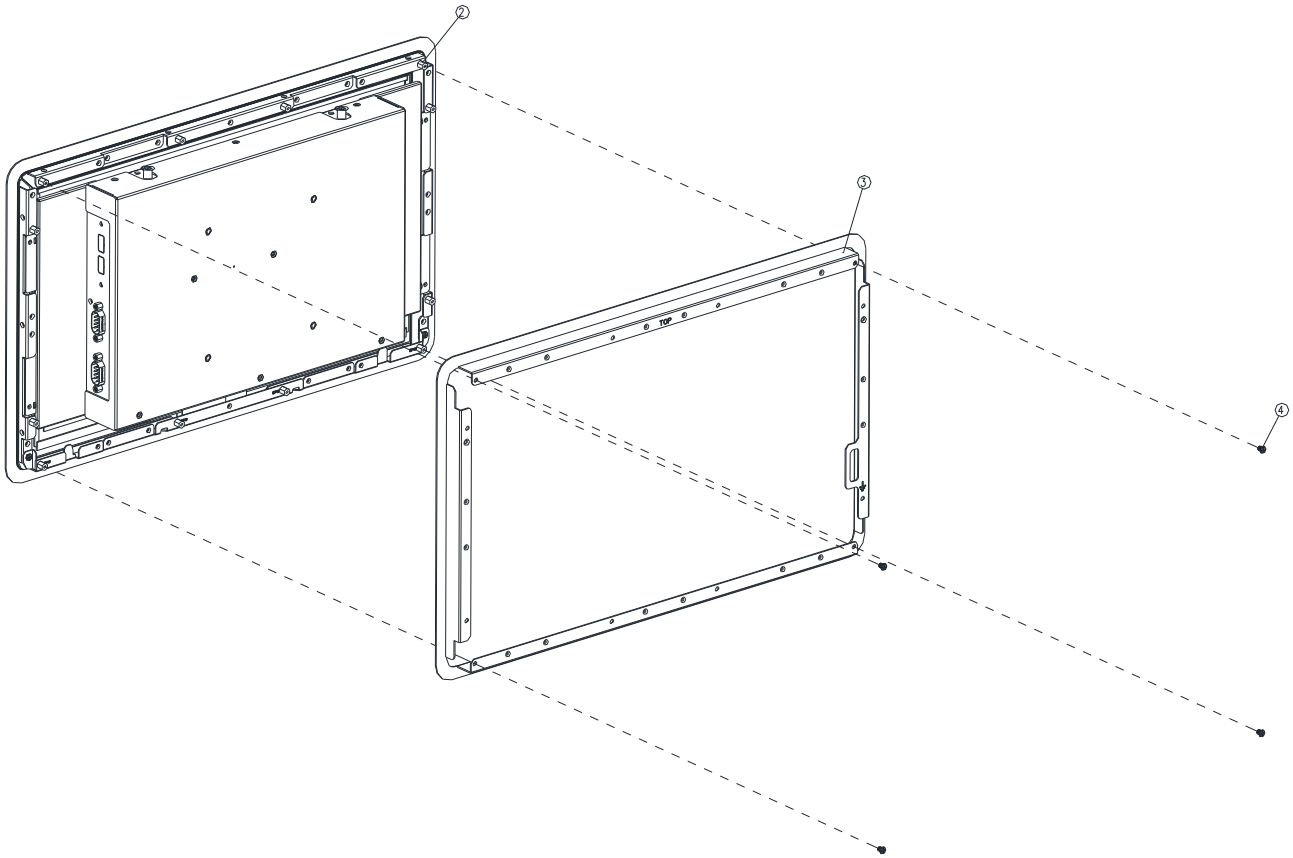


Step2. Assemble the Front bracket to OFP-15W33 and fasten 4 screws on the corresponding Hexagon Studs.

4	Screw	4
3	Front Bracket	1
2	Hexagon Stud	4
Item	Part Name	Quantity

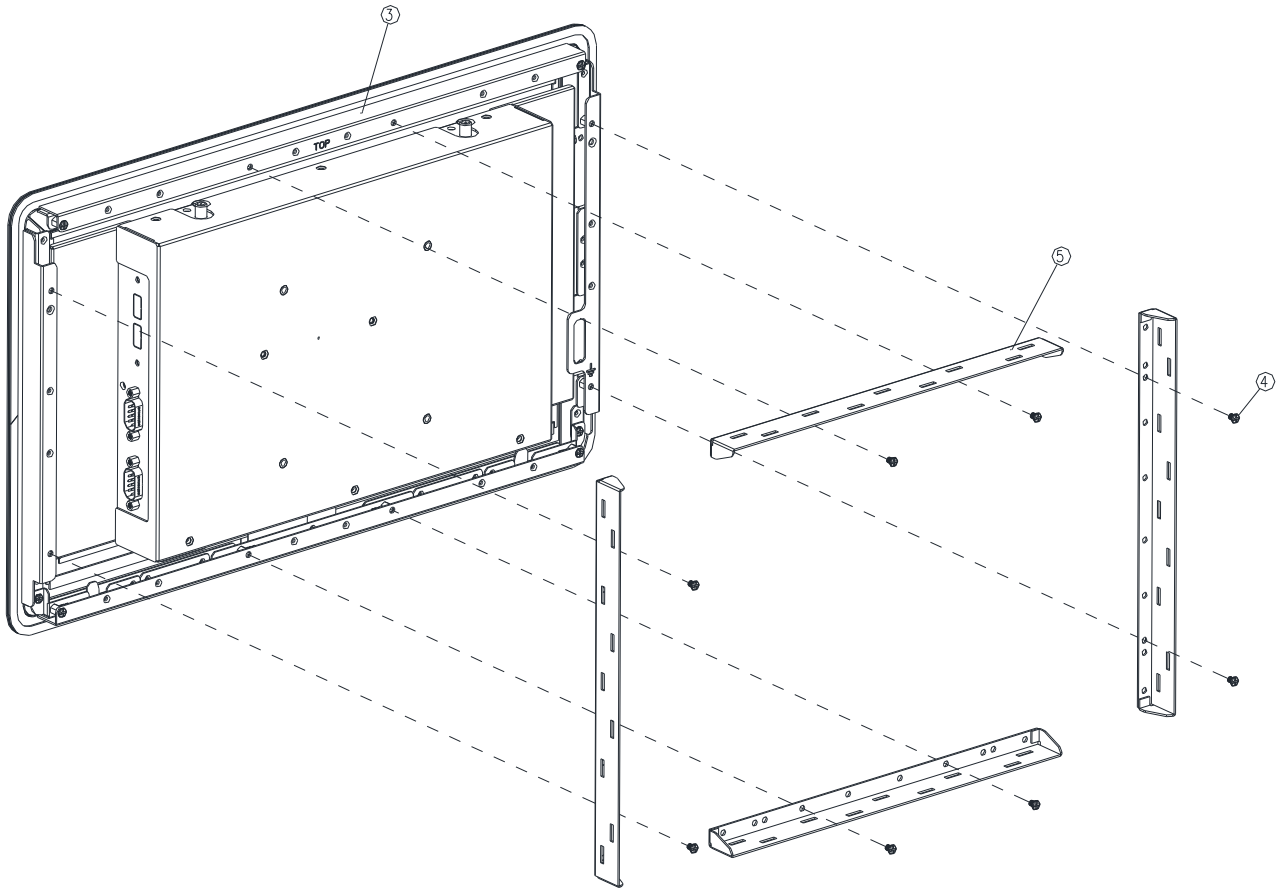

Step3. Assemble the 4pcs Panel Mount Brackets on the Front Bracket and fasten the 8 pcs screws to the corresponding holes.


5	Panel Mount Bracket	4
4	Screw	8
3	Front Bracket	1
Item	Part Name	Quantity

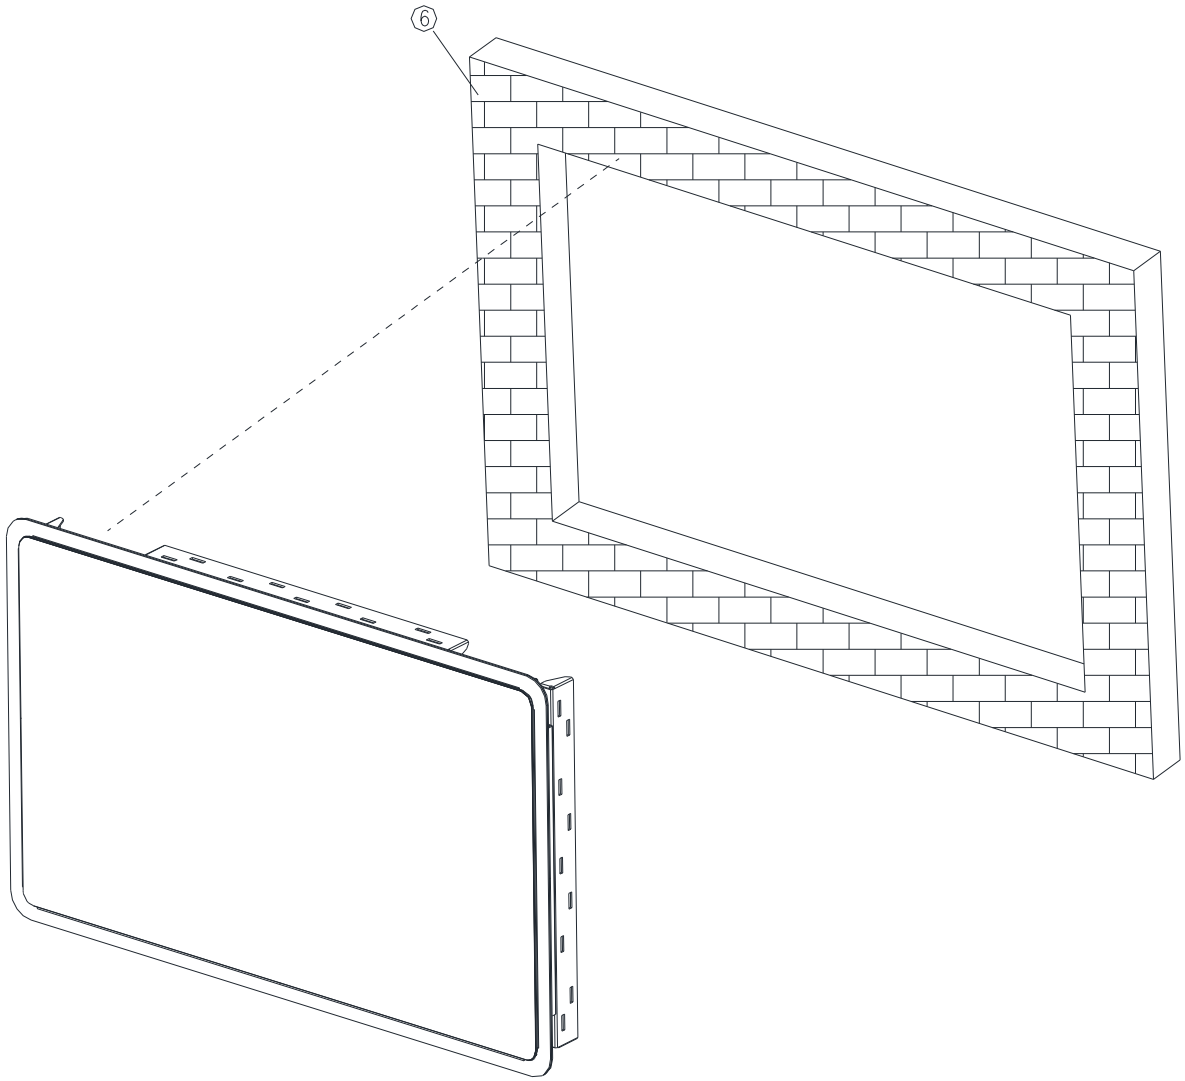

(outside the wall (or cabinet) opening)

Step4. Embed the OFP-15W33 semi-finished product into the wall (or cabinet) opening.

6	Wall	1
Item	Part Name	Quantity

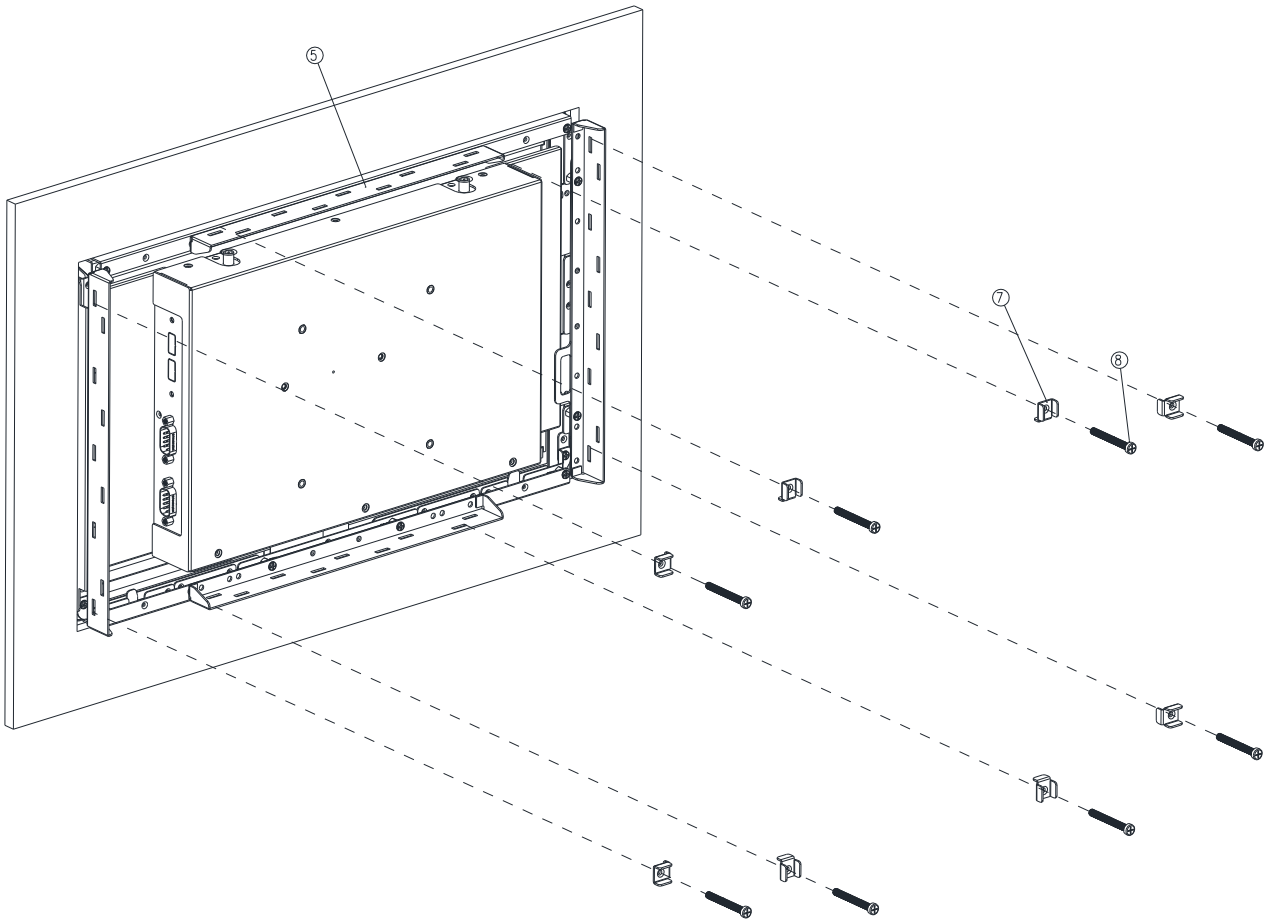

(inside the wall (or cabinet))

Step5. Fasten the Panel mount screw*8 to the Panel mount kit bracket*8 (as shown in Figure 5-1), and then attach them to the Panel Mount Bracket*4 fixing slots.






Figure 5-1

8	Panel mount Screw	8
7	Panel Mount Kit Bracket	8
5	Panel Mount Bracket	4
Item	Part Name	Quantity






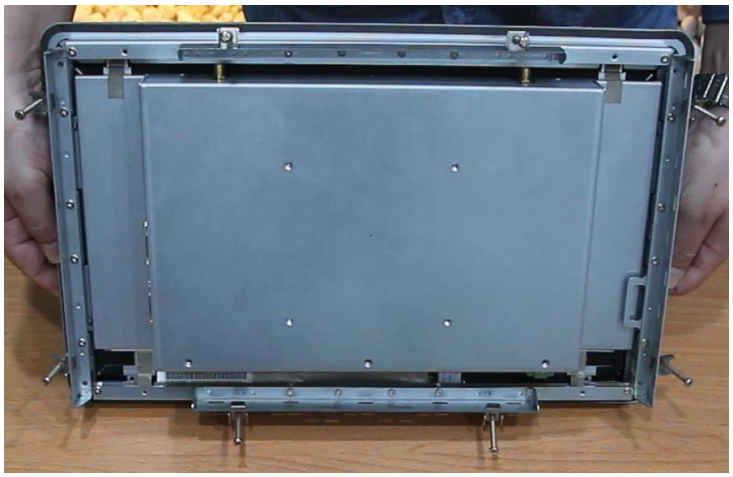

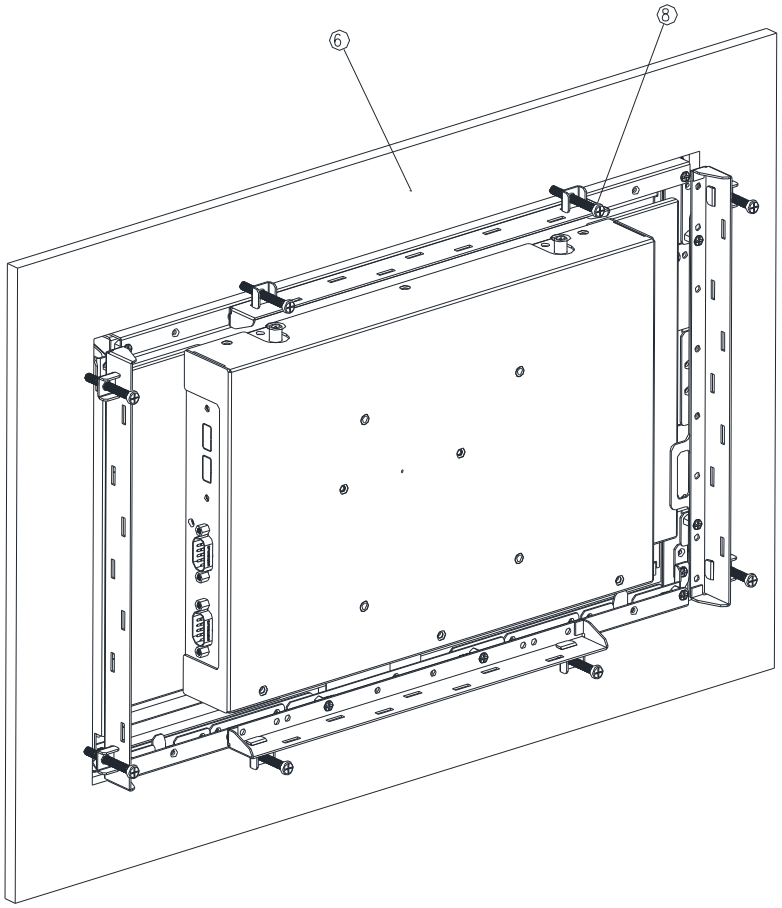


Step6. Fasten the Panel mount screw*8 against the wall, so that the entire module can be secured by the Panel mount screws and Panel mount kit brackets..

8	Panel mount Screw	8
6	Wall	1
Item	Part Name	Quantity

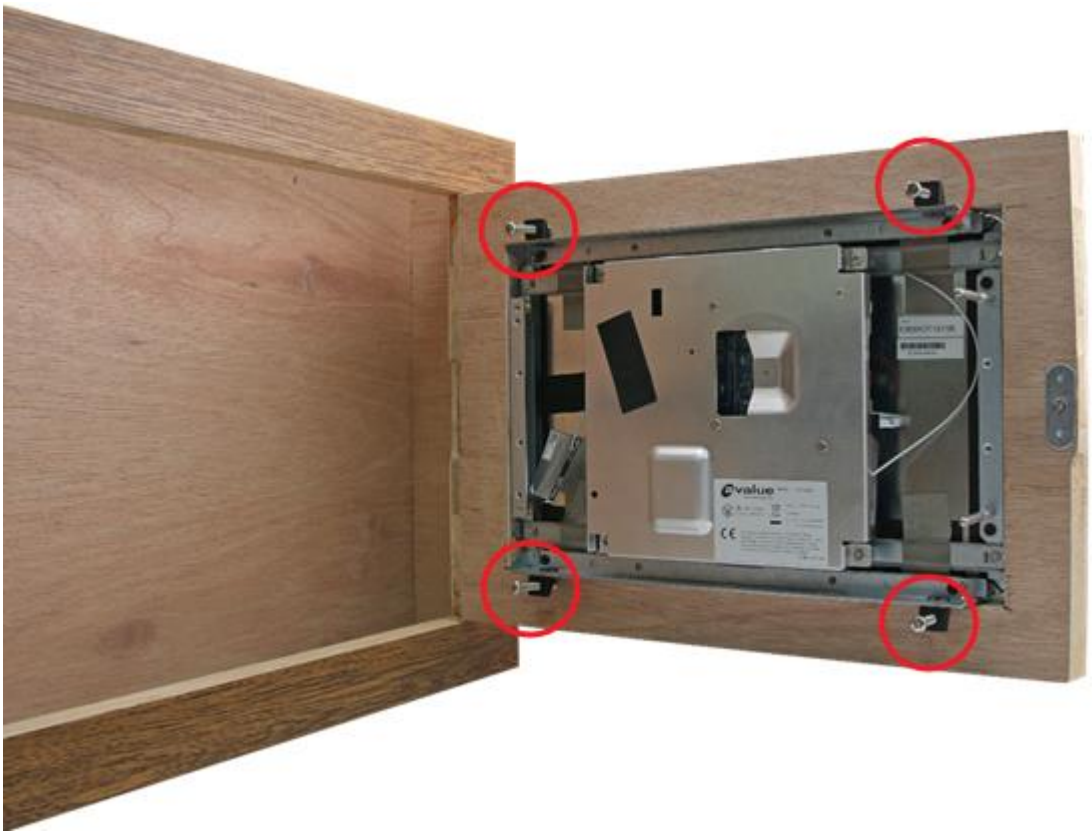


(The diagram is demonstrated by OFP-10W01, but the concept “the entire module can be secured by fastening the Panel mount screws against the wall” is the same)

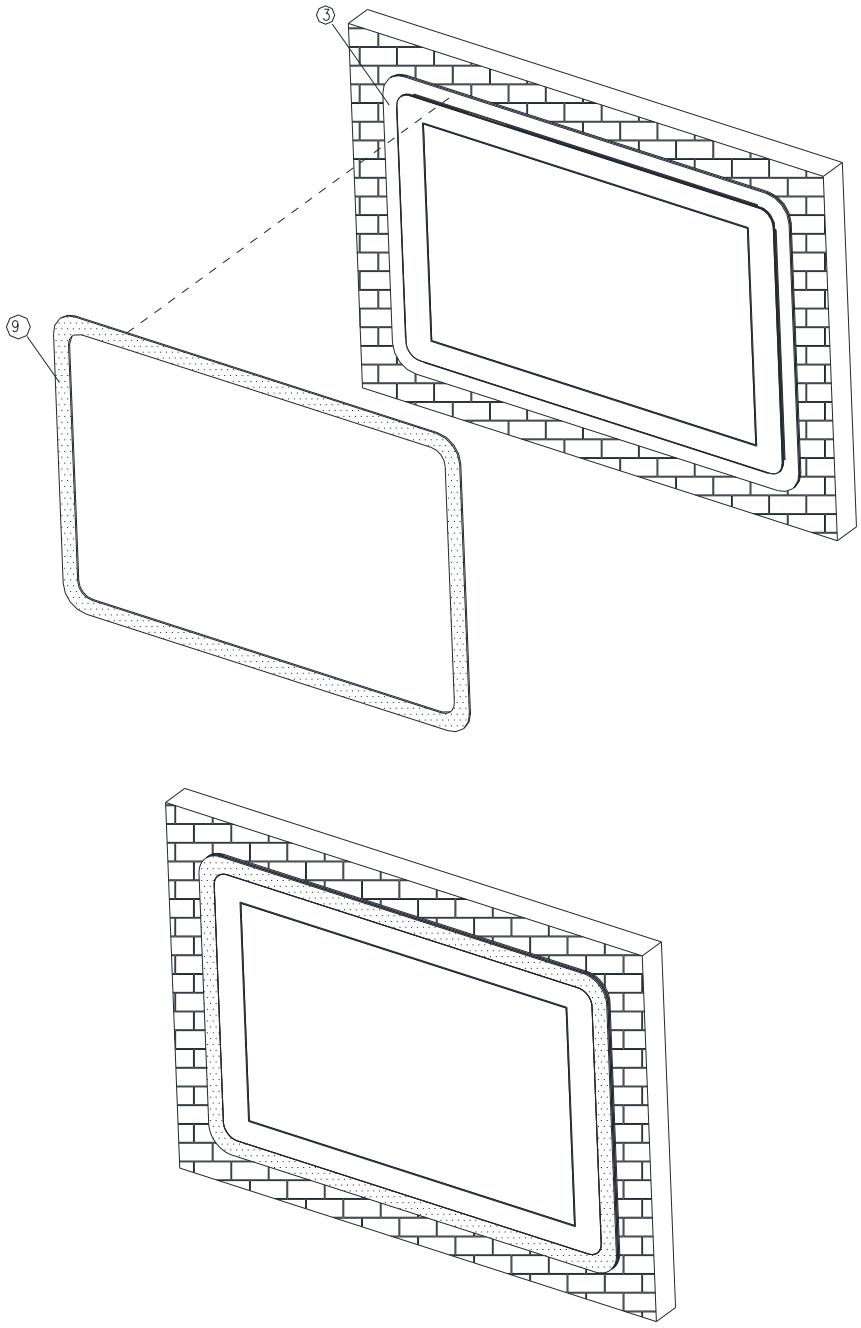


Step7. Paste the Decoration Plate on the Front bracket to complete installation.

9	Decoration Plate	1
3	Front Bracket	1
Item	Part Name	Quantity



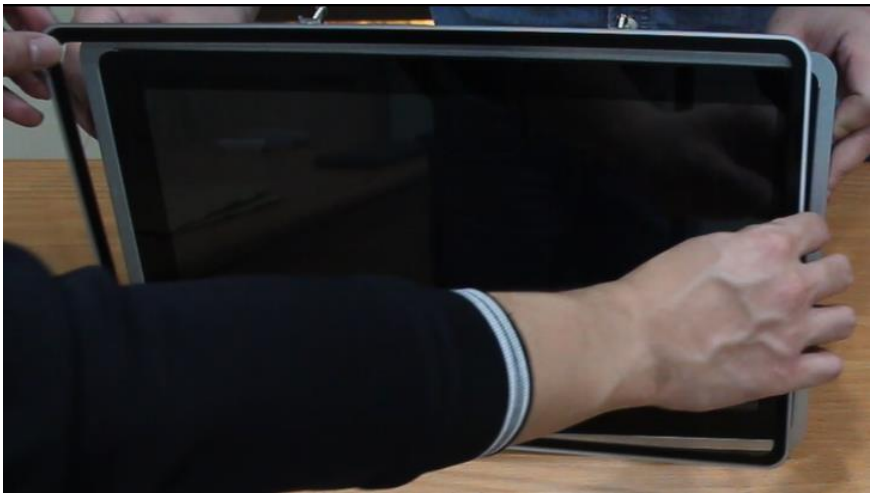


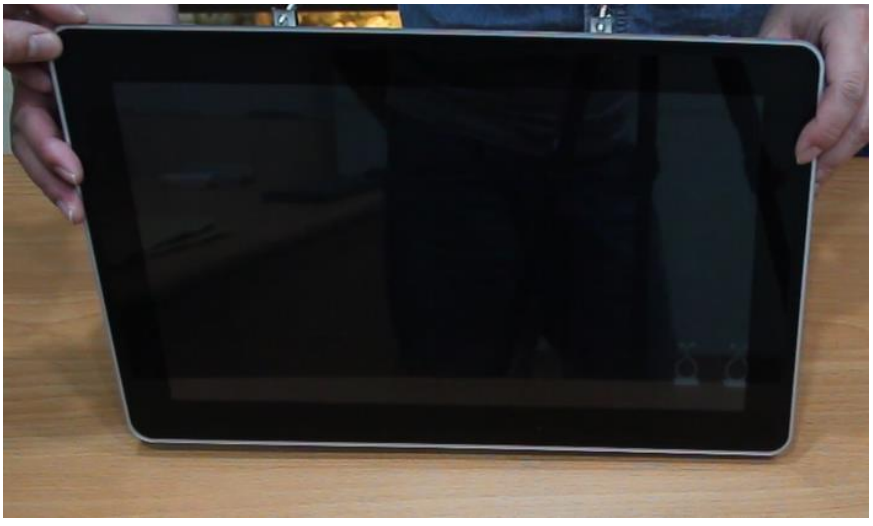

1.7 Wall Mounting


Wall mount is the solution for mounting OFP into the wall.

Size of the opening:

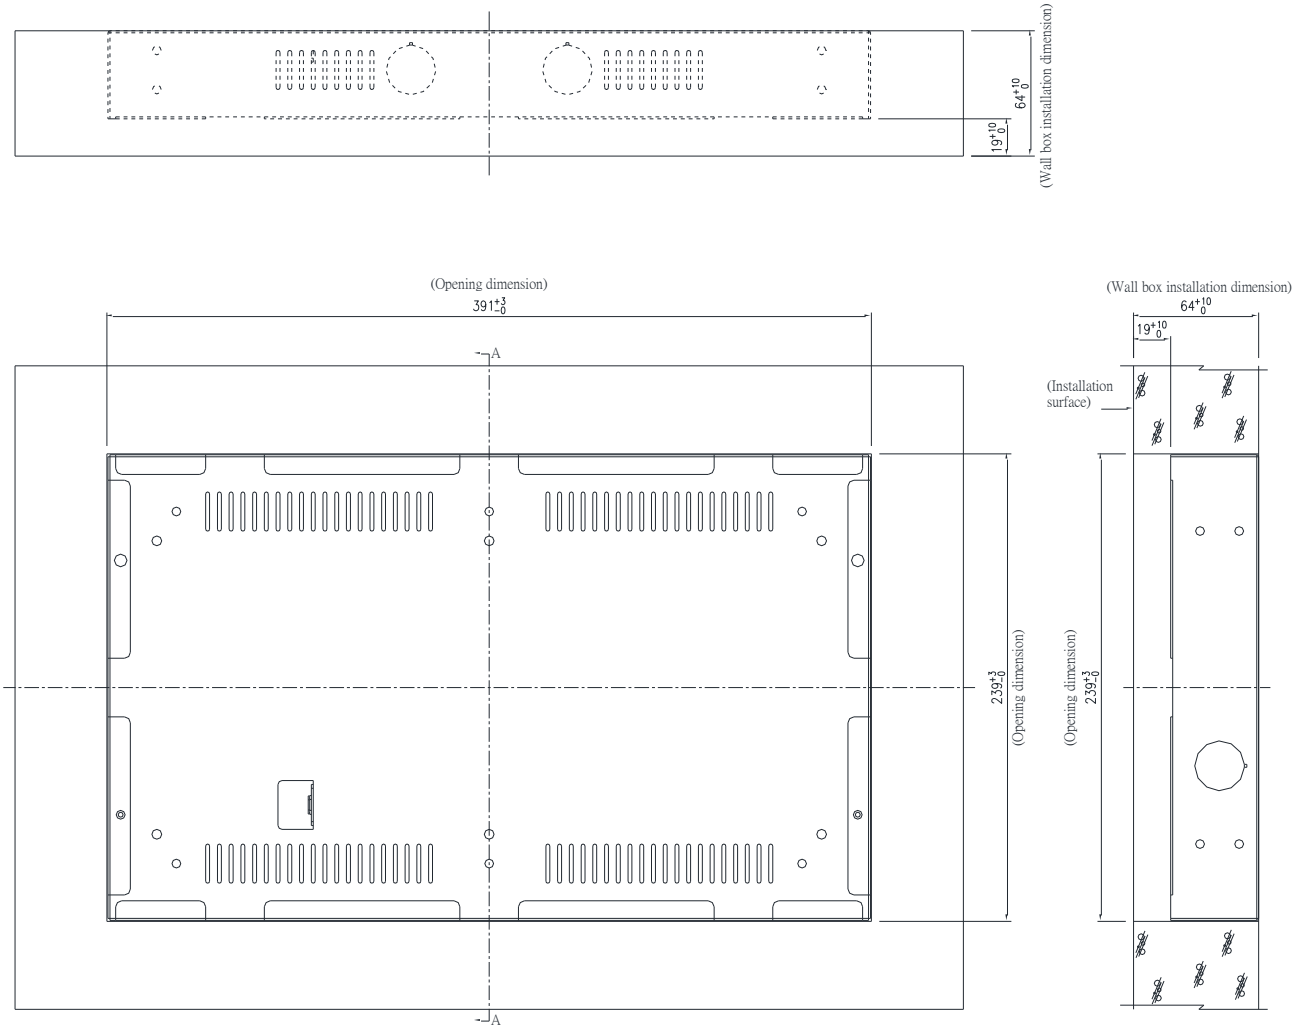


(Unit: mm)

Screw hole location:

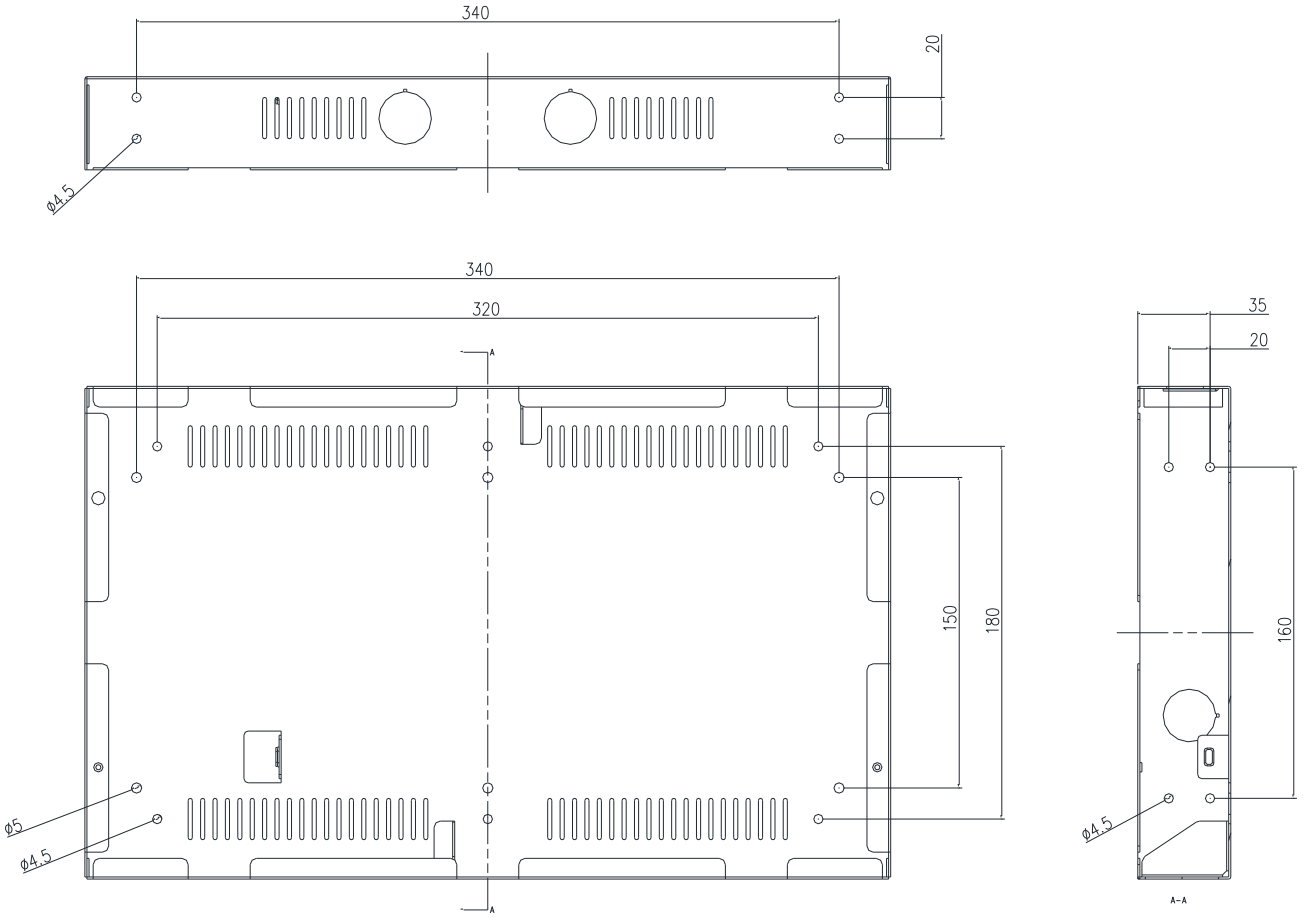


(Unit: mm)

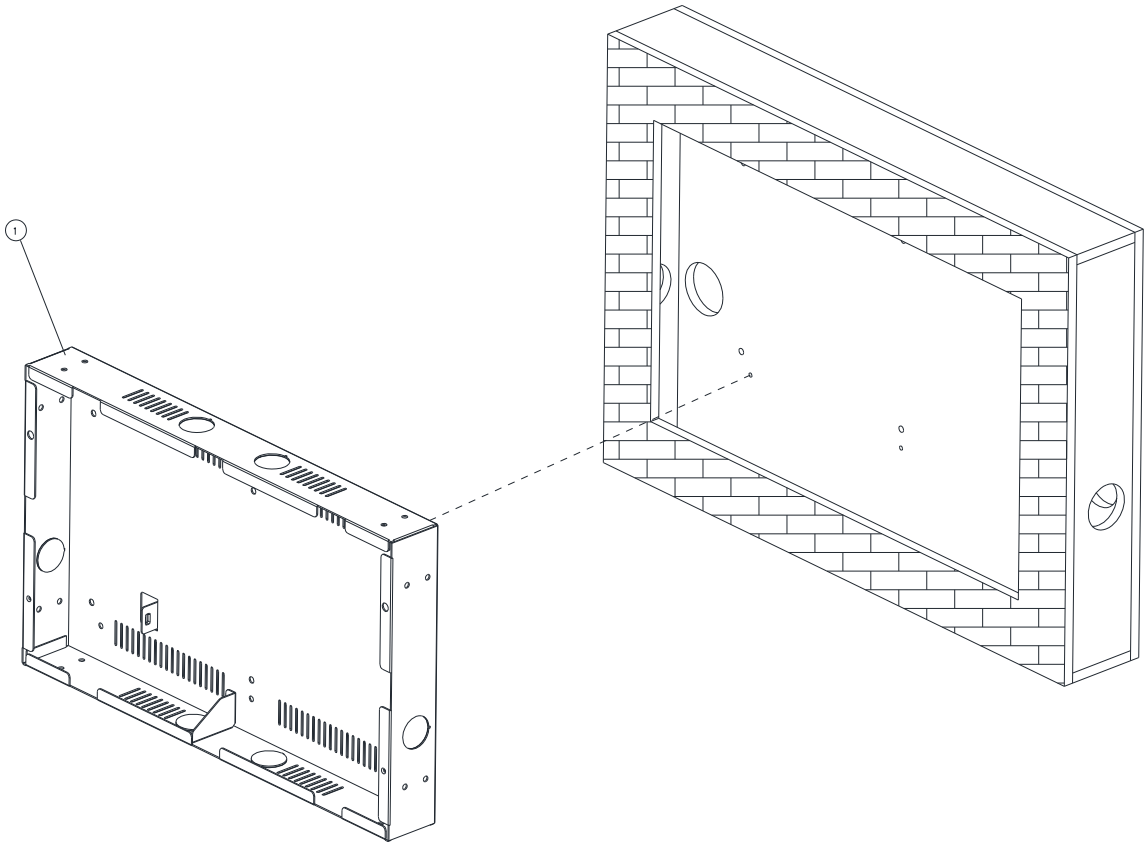


Step1. Install the 15” Wall Box and fix it on the wall, and use suitable screws to lock the wall box (the screws can be purchased according to actual needs)

1	Wall box	1
Item	Part Name	Quantity

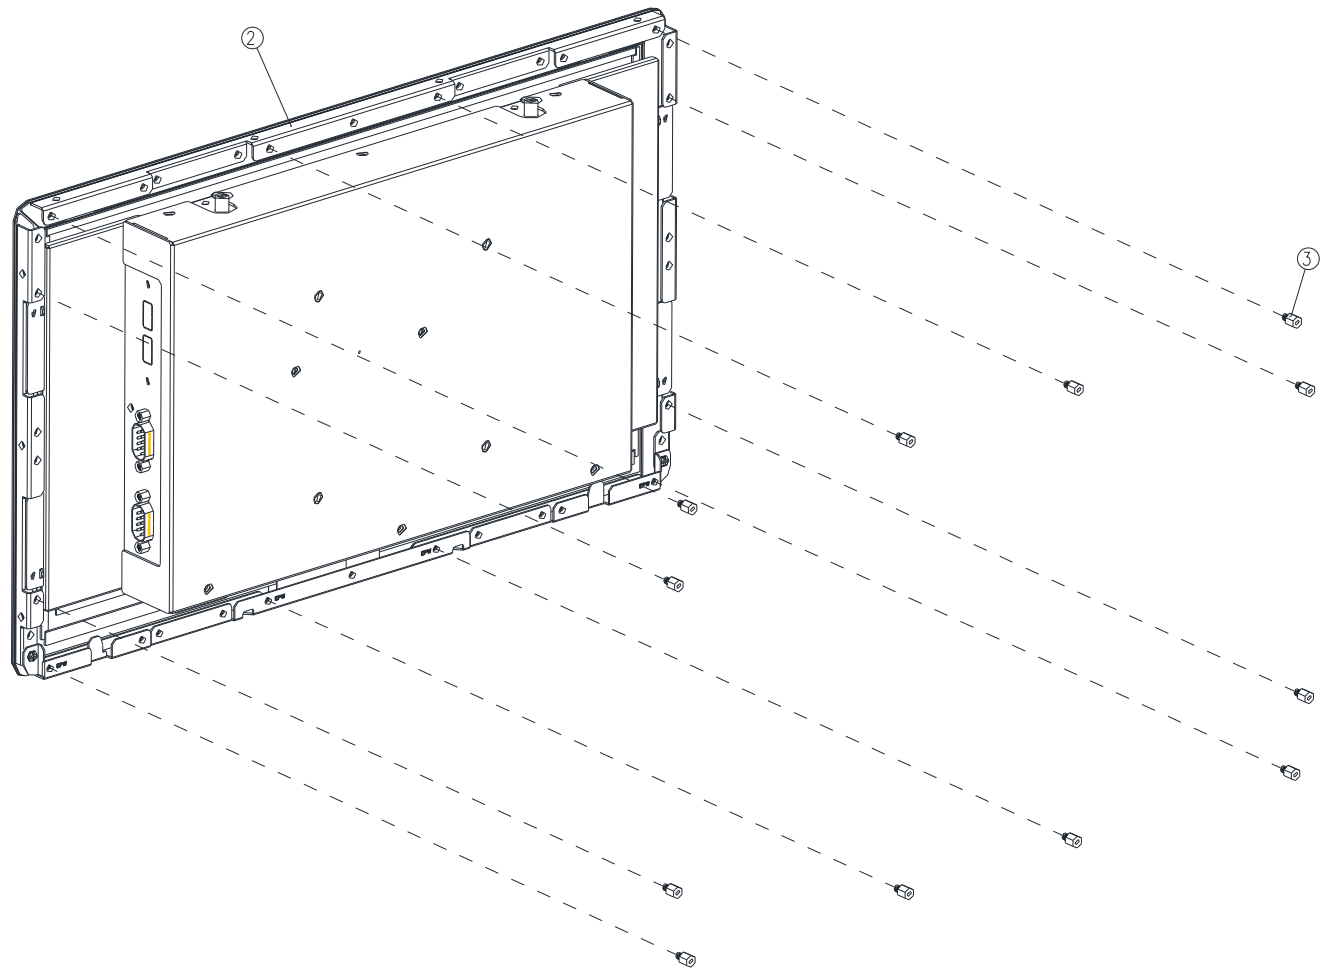

Step2. Fasten 12pcs Hexagon Studs on each side of the OFP-15W33 Panel Bracket.

3	Hexagon Stud	12
2	OFP-15W33	1
Item	Part Name	Quantity

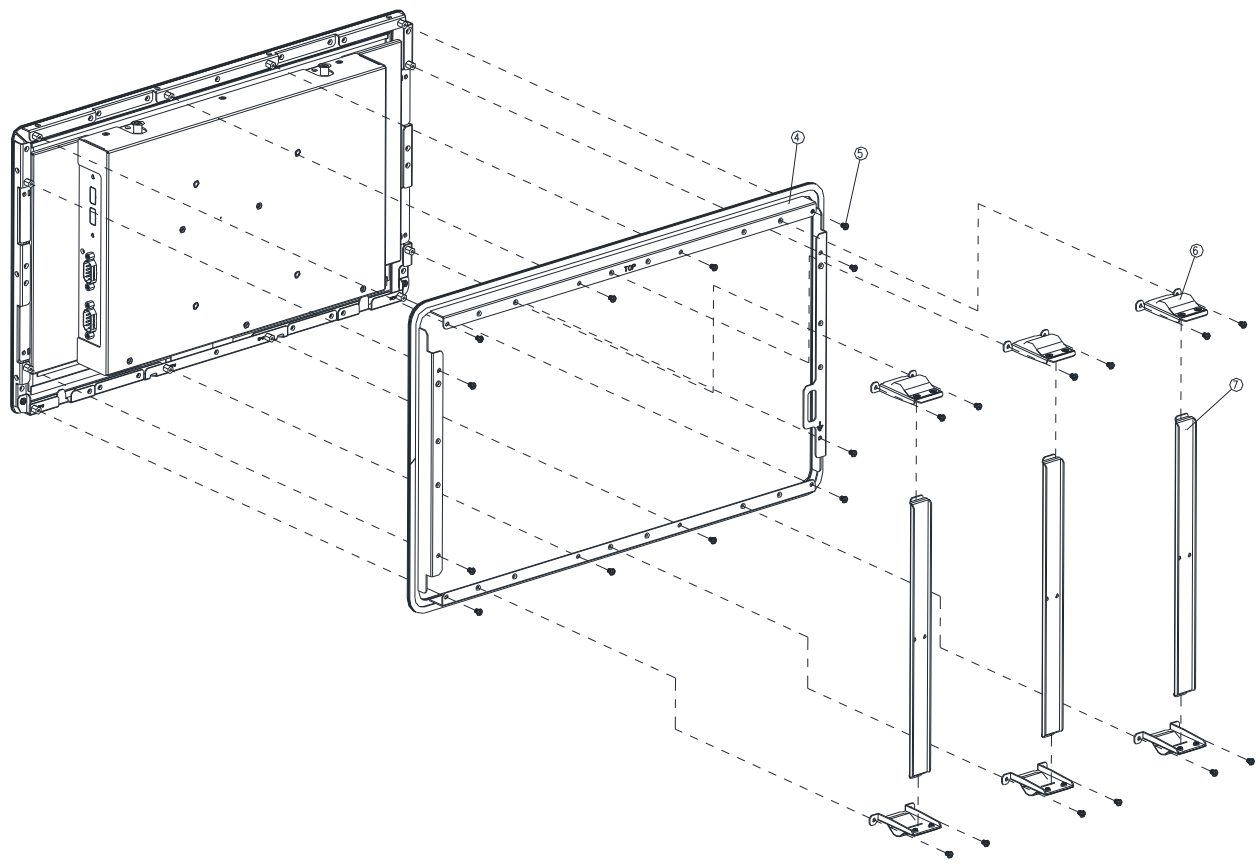


Step3-1. Assemble the Front bracket to the OFP-15W33, and fasten the 12 pcs screws on the corresponding Hexagon Studs;


Step3-2. Assemble the 3 pcs Wall mount kit to the Front bracket with 6pcs screws.


Step3-3. Insert the 3 pcs Support Bracket into the rectangular hole of Wall mount kit.

Step3-4. Insert the 3 pcs Wall mount kit's rectangular hole into the 3 pcs Support Bracket and fasten 6 pcs screws into the front bracket.

7	Support Bracket	3
6	Wall mount kit	6
5	Screw	24
4	Front bracket	1
Item	Part Name	Quantity

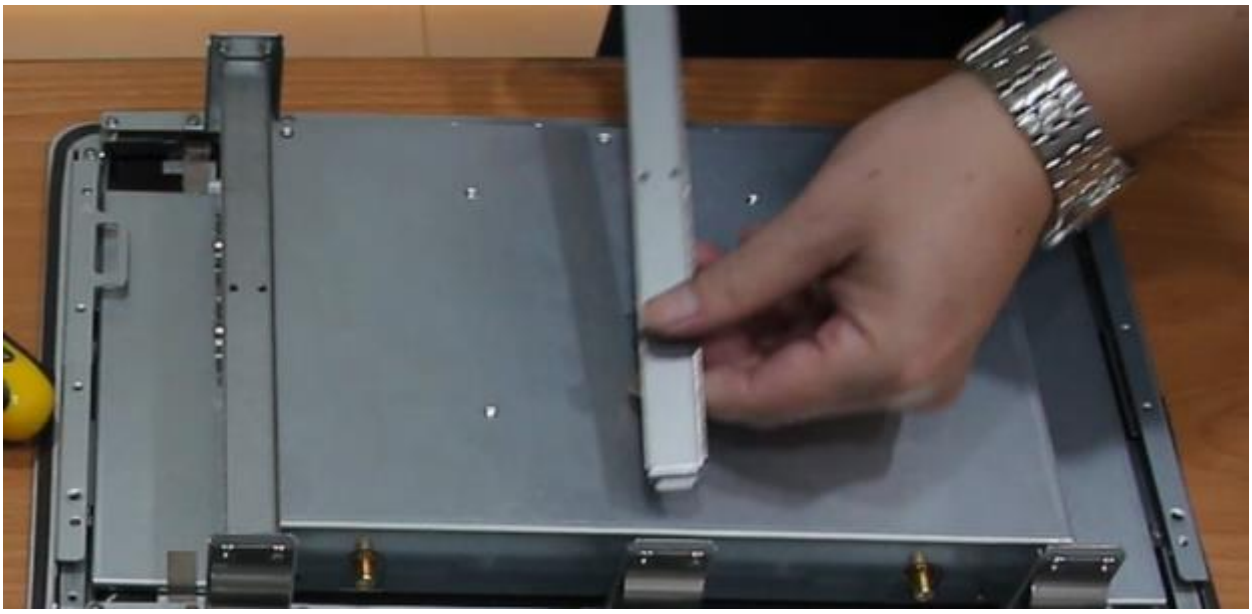


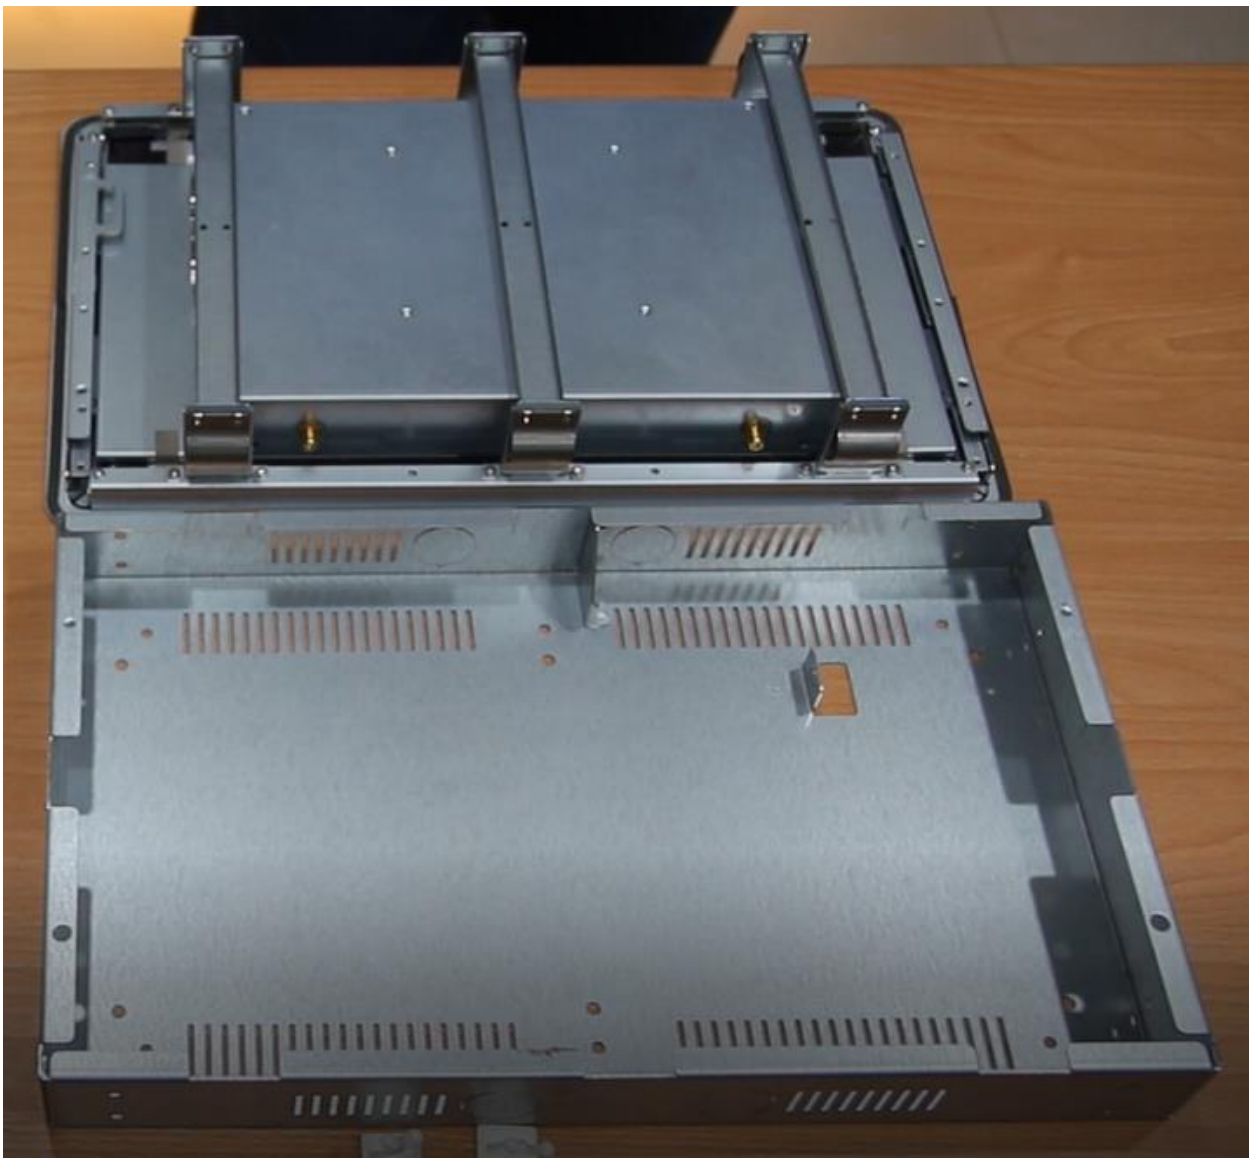

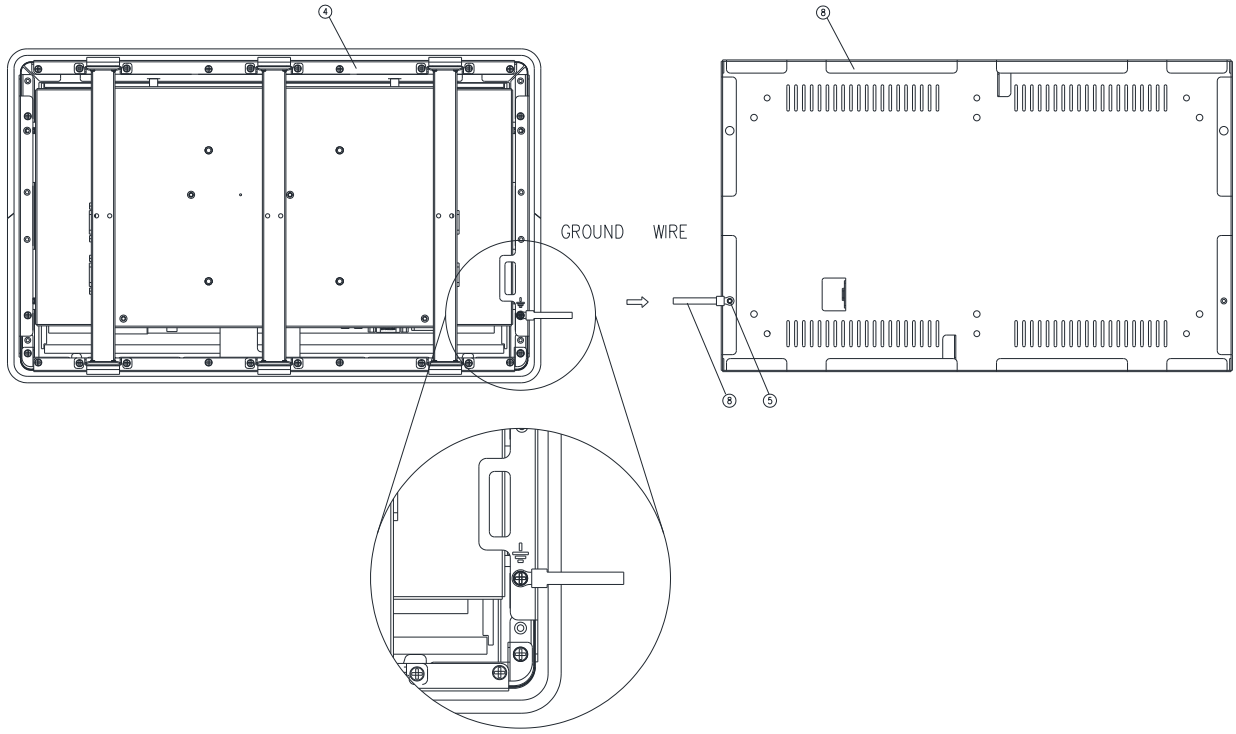


Step4. Fasten the Ground wire with 2 screws on the ground screw holes of Front bracket and Wall box.

8	Ground wire	1
5	Screw	2
4	Front bracket	1
1	Wall box	1
Item	Part Name	Quantity

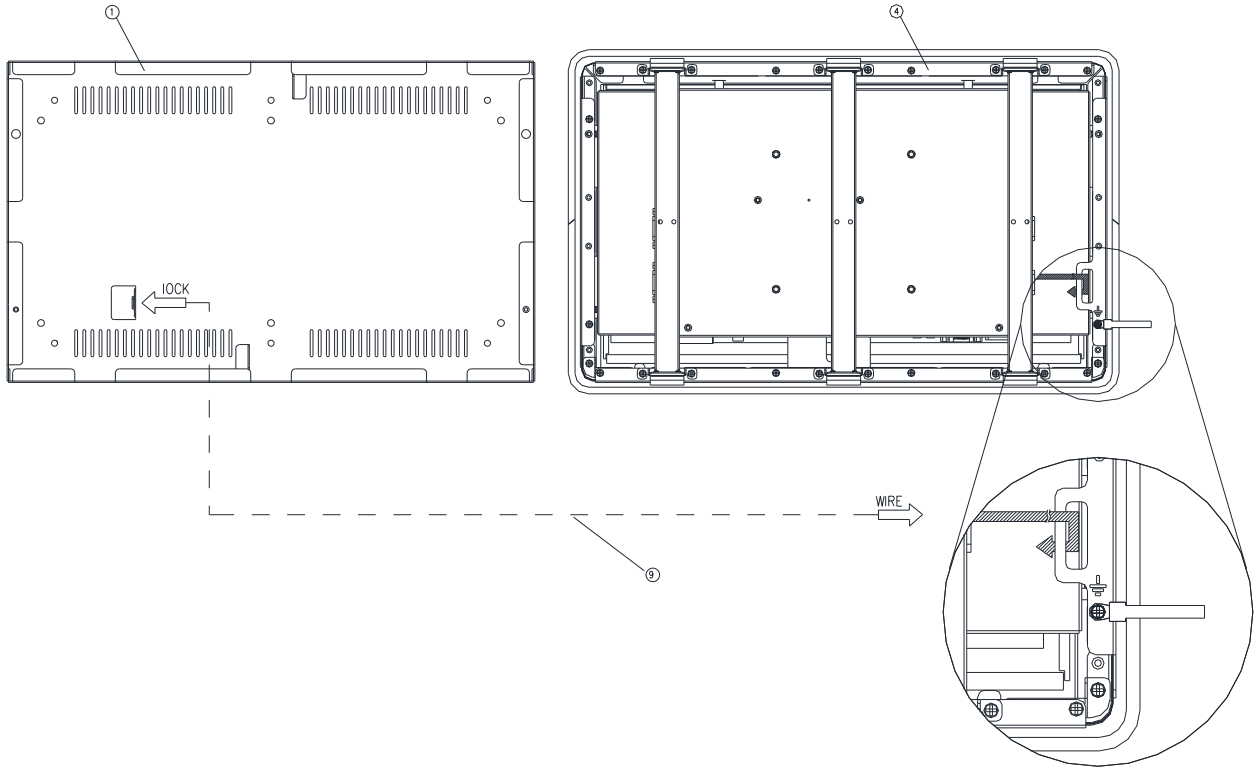

Step5. Wrap the Kensington lock (option) around the hole in the Front bracket and attach the lock to the keyhole in the Wall box.

9	Kensington lock	1
4	Front bracket	1
1	Wall box	1
Item	Part Name	Quantity

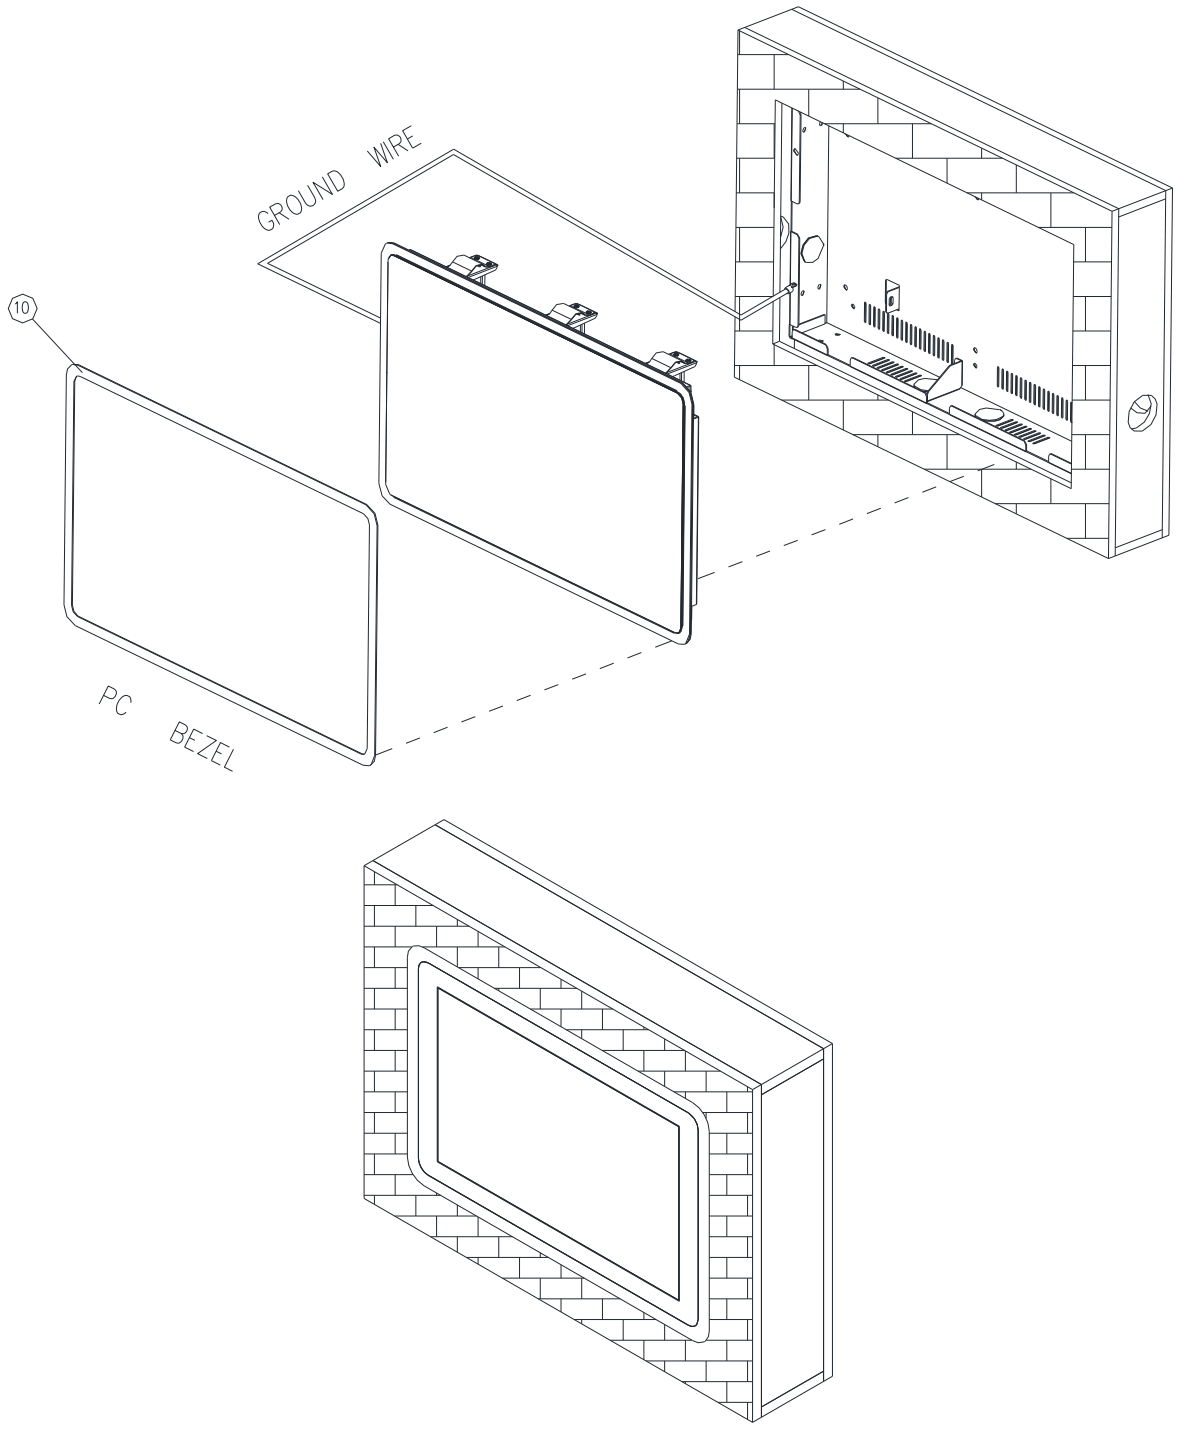

Step6-1. Store the Ground wire and Kensington lock in the Wall box and embed the OFP-15W33 semi-finished product into the wall (Wall Box).

Step6-2. Paste the Decoration Plate on the Front bracket to complete installation.

10	PC bezel	1
Item	Part Name	Quantity







2. Hardware Configuration

For advanced information, please refer to:

1- EMX-APLP included in this manual.





Note: If you need more information, please visit our website:

www.avalue.com

2.1 OFP-15W33 connector mapping

2.1.1 Serial Port connector (COM)

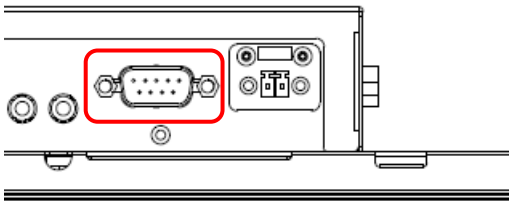



In RS-232 Mode

Signal	PIN	PIN	Signal
NDCD#	1	6	NDSR#
NRXD	2	7	NRTS#
NTXD	3	8	NCTS#
NDTR#	4	9	NRI#
GND	5		


In RS-422 Mode

Signal	PIN	PIN	Signal
TxD1-	1	6	NC
TxD1+	2	7	NC
RxD1+	3	8	NC
RxD1-	4	9	NC
GND	5		

In RS-485 Mode

Signal	PIN	PIN	Signal
DATA1-	1	6	NC
DATA1+	2	7	NC
NC	3	8	NC
NC	4	9	NC
GND	5		


2.1.2 DC power-in connector (DC in)

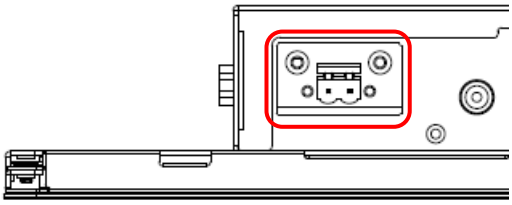




Signal	PIN
+V12-24_DCIN	1
GND	2

2.2 Product Overview

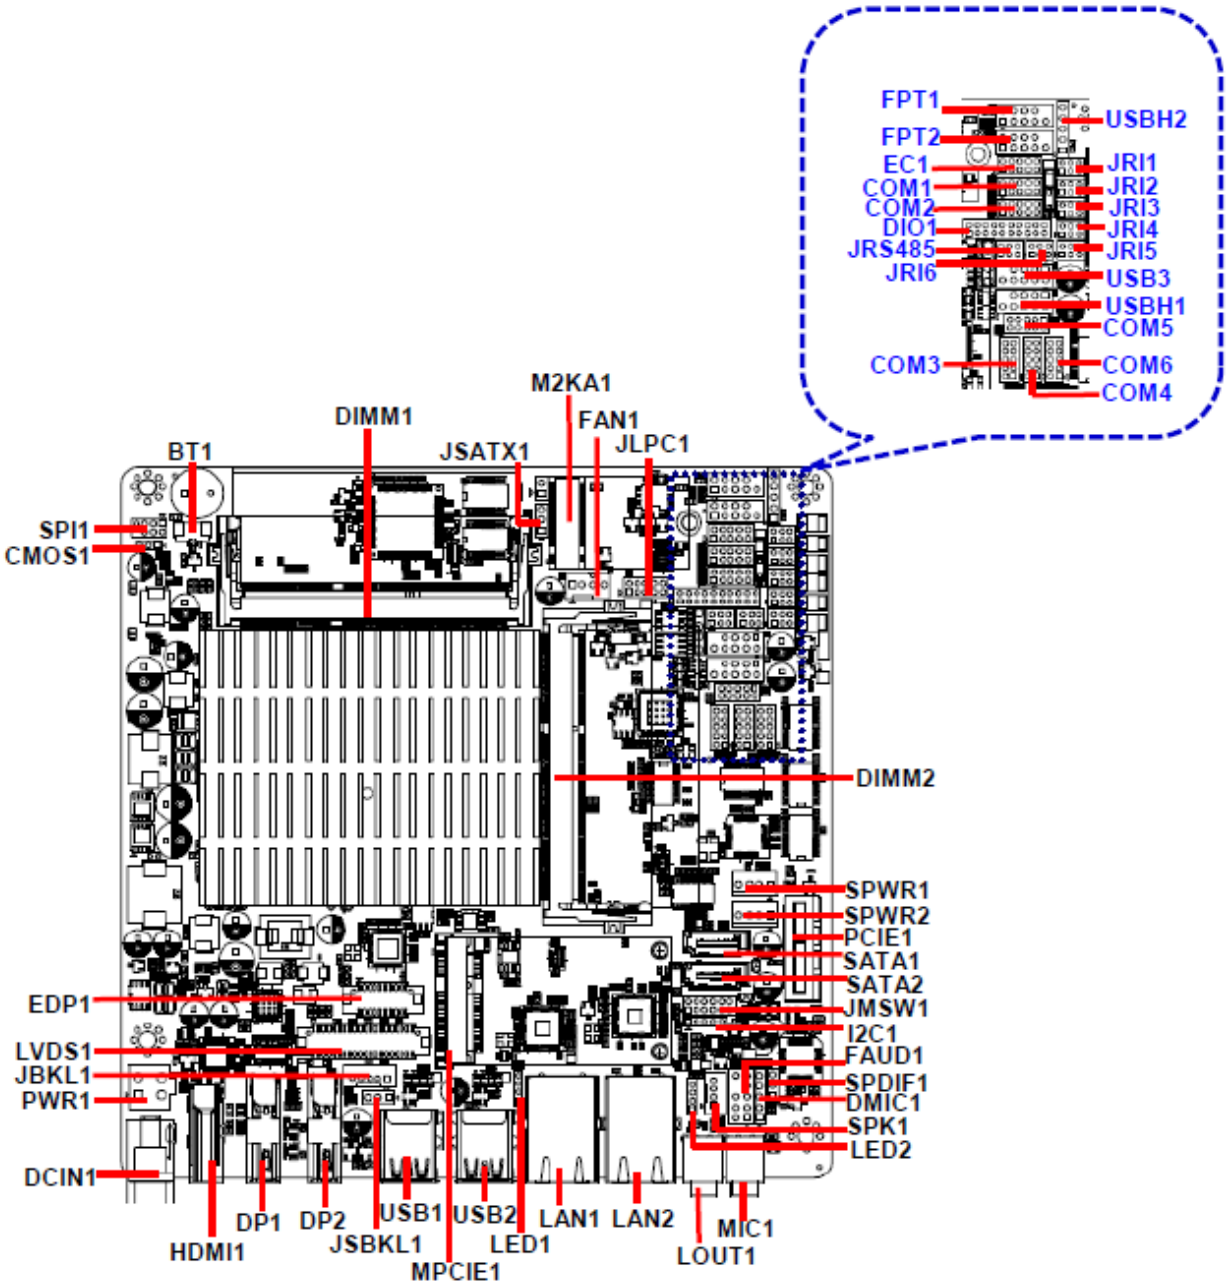


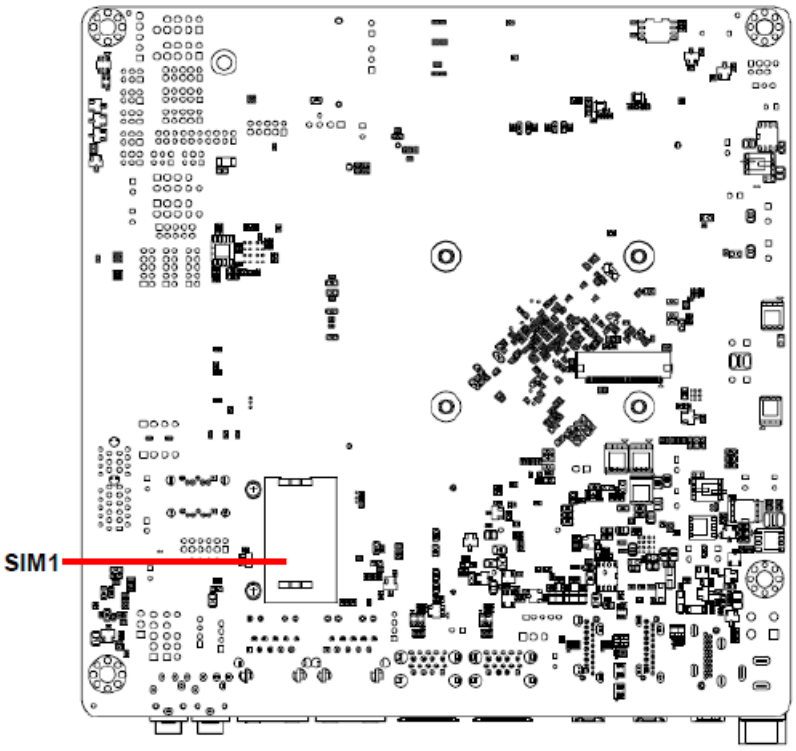
SIM1

2.3 Jumper and Connector List

You can configure your board to match the needs of your application by setting jumpers. A jumper is the simplest kind of electric switch.

It consists of two metal pins and a small metal clip (often protected by a plastic cover) that slides over the pins to connect them. To “close” a jumper you connect the pins with the clip. To “open” a jumper you remove the clip. Sometimes a jumper will have three pins, labeled 1, 2, and 3. In this case, you would connect either two pins.



Open Closed Closed 2-3

The jumper settings are schematically depicted in this manual as follows:



Open Closed Closed 2-3

A pair of needle-nose pliers may be helpful when working with jumpers.

Connectors on the board are linked to external devices such as hard disk drives, a keyboard, or floppy drives. In addition, the board has a number of jumpers that allow you to configure your system to suit your application.

If you have any doubts about the best hardware configuration for your application, contact your local distributor or sales representative before you make any changes.

The following tables list the function of each of the board’s jumpers and connectors.

Jumpers

Label	Function	Note
JRI1/2/3/4/5/6	Serial port 1/2/3/4/5/6 pin9 signal select	3 x 2 header, pitch 2.00mm
JMSW1	SATA2/MSATA1 mPCIe slot selector	6 x 2 header, pitch 2.00mm
JSBKL1	LVDS Back Light power selection	3 x 1 header, pitch 2.54mm
JSATX1	AT/ATX Power Mode Select	3 x 1 header, pitch 2.54mm
CMOS1	Clear CMOS	3 x 1 header, pitch 2.00mm

Connectors


Label	Function	Note
FAN1	CPU fan connector	4 x 1 wafer, pitch 2.54mm
FPT1	Front Panel connector 1	5 x 2 header, pitch 2.54mm
FPT2	Front Panel connector 2	5 x 2 header, pitch 2.54mm

DIMM1/2	204-pin DDR3L DIMM socket	
FAUD1	Front Audio connector	5 x 2 header, pitch 2.54mm
JBKL1	LCD Inverter connector	5 x 1 wafer, pitch 2.00mm Compatible with Connector: JST PHR-5
SPI1	SPI connector	4 x 2 header, pitch 2.00mm
COM1	Serial Port 1 connector	5 x 2 header, pitch 2.00mm
COM2	Serial Port 2 connector	5 x 2 header, pitch 2.00mm
COM3	Serial Port 3 connector	5 x 2 header, pitch 2.00mm
COM4	Serial Port 4 connector	5 x 2 header, pitch 2.00mm
COM5	Serial Port 5 connector	5 x 2 header, pitch 2.00mm
COM6	Serial Port 6 connector	5 x 2 header, pitch 2.00mm
JRS485	Serial Port 1 RS485/422 Mode connector	3 x 2 header, pitch 2.00mm
DIO1	General purpose I/O connector	10 x 2 header, pitch 2.00mm
SPK1	Speaker connector	4 x 1 wafer, pitch 2.00mm
LVDS1	LVDS Connector	DIN 40-pin wafer, pitch 1.25mm Compatible with Connector: Hirose DF13-40DS-1.25C
USB1/2	USB connector 1/2	
USB3	USB 2.0 connector	5 x 2 header, pitch 2.54mm
USBH1	USB 2.0 connector	5 x 2 header, pitch 2.54mm
USBH2	USB 2.0 connector	5 x 1 header, pitch 2.54mm
SPDIF1	Sony/Philips Digital Interface	3 x 1 header, pitch 2.54mm
LAN1/2	RJ-45 Ethernet 1/2	
PCIE1	PCIe connector	
LED1	LED indicator connector 1	4 x 1 header, pitch 2.00mm
LED2	LED indicator connector 2	4 x 1 header, pitch 2.00mm
DP1/2	DP connector 1/2	
EDP1	eDP connector	10 x 2 wafer, pitch 1.25mm
BT1	Battery connector	2 x 1 wafer, pitch 1.25mm
M2KA1	M.2 Type A 2230 connector	
MPCIE1	Mini-PCIe connector 1	
JLPC1	LPC connector	5 x 2 header, pitch 2.00mm
PWR1	Power connector	2 x 2 wafer, pitch 4.20mm
SATA1/2	Serial ATA connector 1/2	
SPWR1/2	SATA Power connector 1/2	4 x 1 wafer, pitch 2.54mm


EC1	EC_Program	5 x 2 header, pitch 2.00mm
DCIN1	DC Power-in connector	
I2C1	I2C connector	5 x 1 header, pitch 2.00mm
HDMI1	HDMI connector	
LOUT1	Line-out audio jack	
MIC1	Mic-in audio jack	
DMIC1	Digital Microphone connector	5 x 1 header, pitch 2.54mm
SIM1	SIM card slot	

2.4 Setting Jumpers & Connectors


2.4.1 Serial port 1/2/3/4/5/6 pin9 signal select (JRI1/JRI2/JRI3/JRI4/JRI5/JRI6)

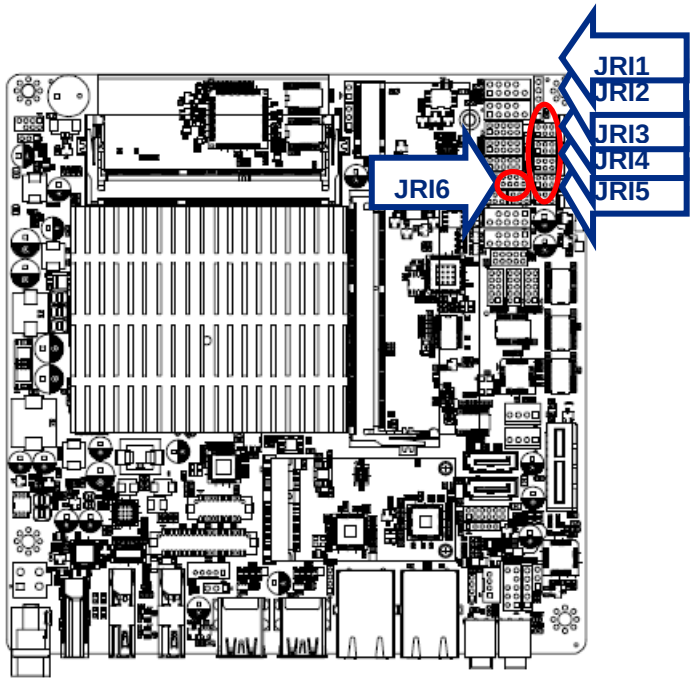


Ring*



+5V




+12V




*** Default**

2.4.2 SATA2/MSATA1 mPCIe slot selector (JMSW1)

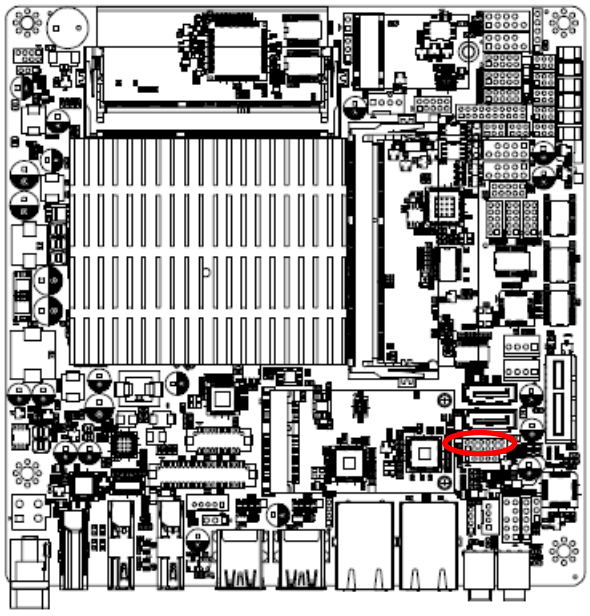


SATA2 Connector*

(SATA2 Connector enabled, MSATA1 slot Disabled)



MSATA1 mPCIe slot

(MSATA1 slot enabled, SATA2 Connector Disabled)




*** Default**


Note:

SATA2/MSATA1 shared SATA signal, can not be used simultaneously.


2.4.3 LVDS Back Light power selection (JSBKL1)

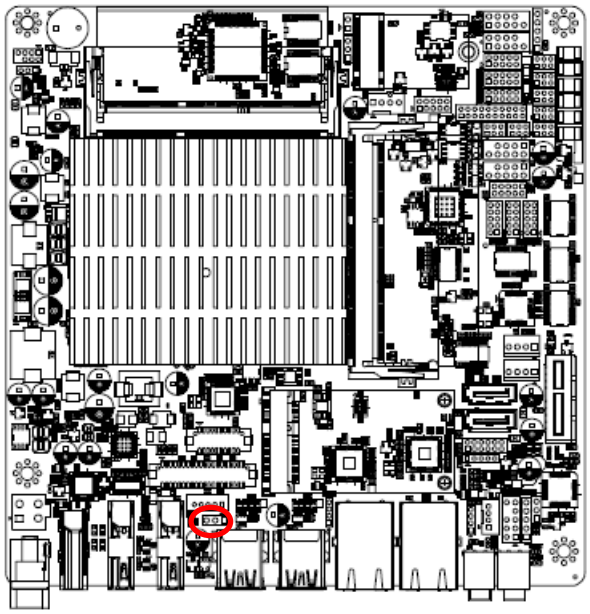

PWM Mode*(Max current: 2A)




DC Mode(Max current: 2A)




*** Default**


2.4.4 AT/ATX Power Mode Select (JSATX1)

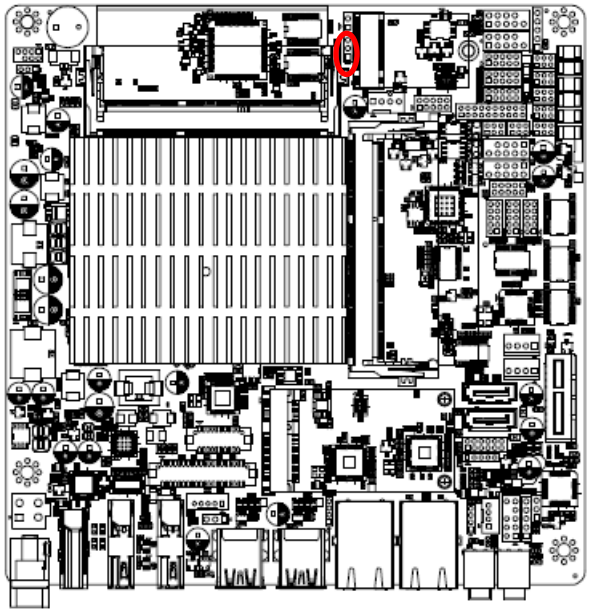

ATX*




AT




*** Default**


2.4.5 Clear CMOS (CMOS1)

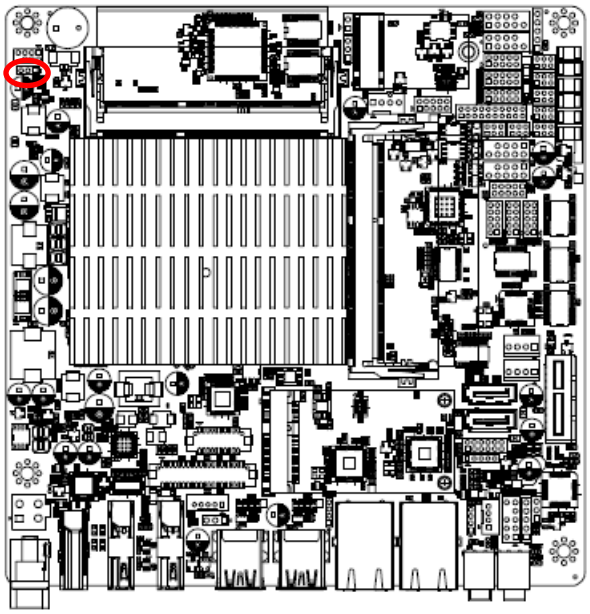

Protect*





Clear CMOS



*** Default**


2.4.6 LCD Inverter connector (JBKL1)

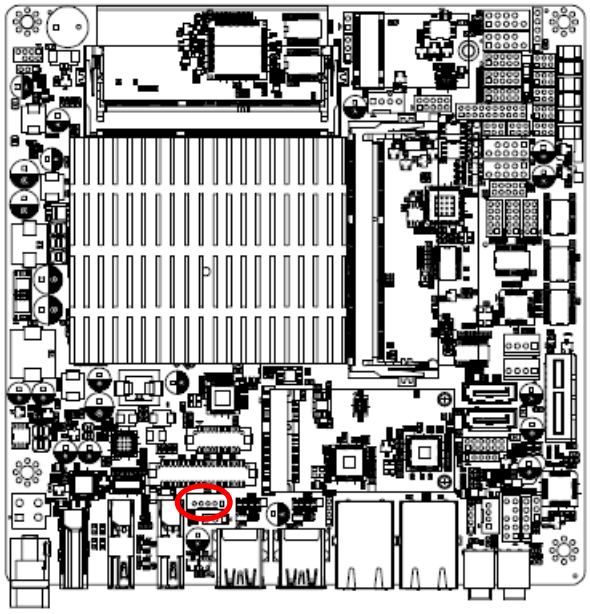




PIN	Signal
1	+12V
2	GND
3	LVDS_BKLTEN
4	LVDS_BKLADJ
5	+5V


2.4.7 Serial port 1/2 connector (COM1/2)

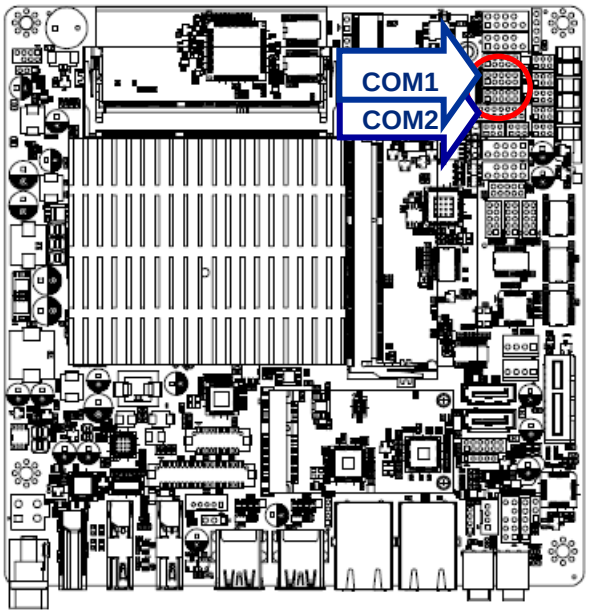




Signal	PIN	PIN	Signal
DCD	1	2	RXD
TXD	3	4	DTR
GND	5	6	DSR
RTS	7	8	CTS
RI	9	10	NC


2.4.8 Serial port 3/4/6 connector (COM3/4/6)

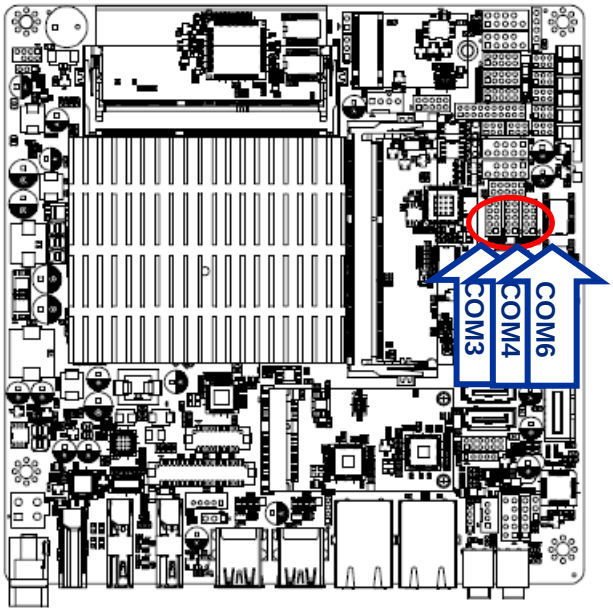




Signal	PIN	PIN	Signal
NC	10	9	RI
CTS	8	7	RTS
DSR	6	5	GND
DTR	4	3	TXD
RXD	2	1	DCD


2.4.9 Serial port 5 connector (COM5)

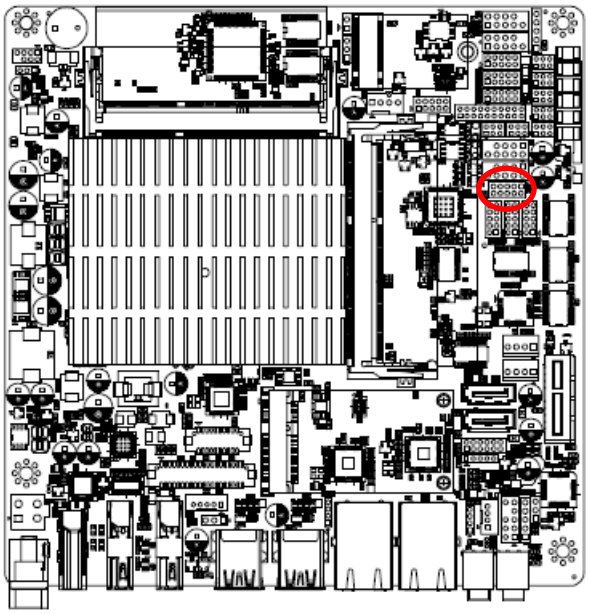




Signal	PIN	PIN	Signal
NDCD#	1	2	NRXD
NTXD	3	4	NDTR#
GND	5	6	NDSR#
NRTS#	7	8	NCTS#
NRI#	9	10	NC


2.4.10 Serial Port 1 RS485/422 Mode connector (JRS485)

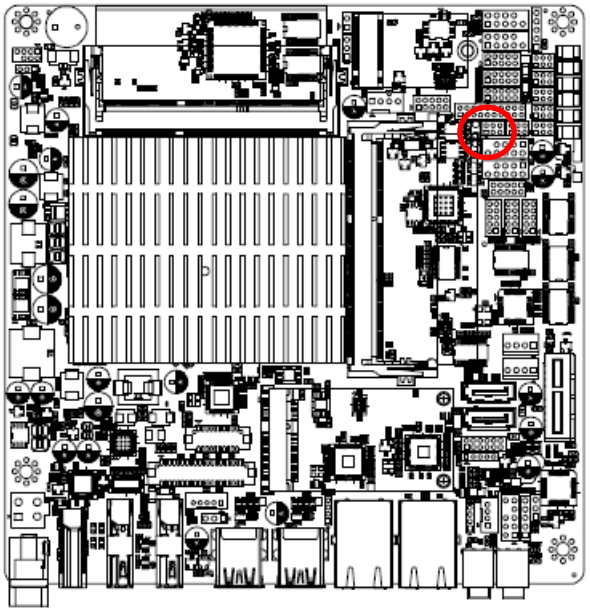




Signal	PIN	PIN	Signal
485TX-	1	2	422RX-
485TX+	3	4	422RX+
GND	5	6	GND


2.4.11 General purpose I/O connector (DIO1)

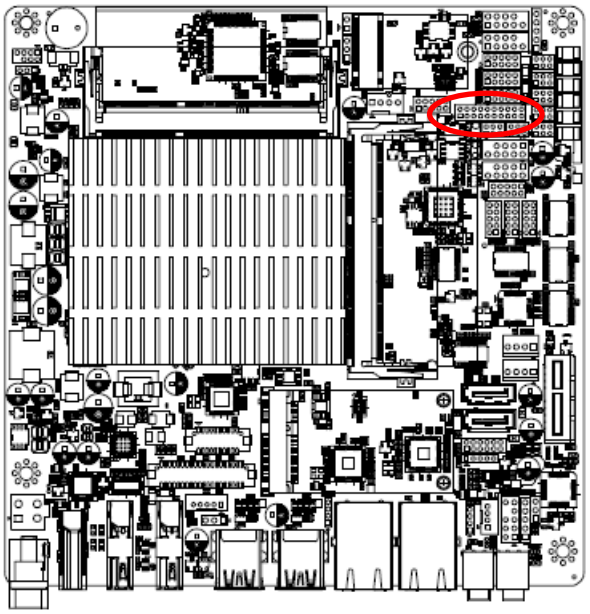


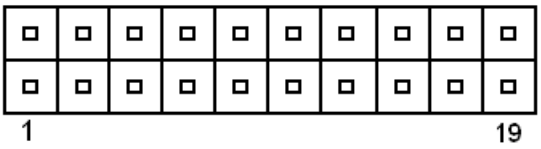

Signal	PIN	PIN	Signal
DI0	1	2	DO0
DI1	3	4	DO1
DI2	5	6	DO2
DI3	7	8	DO3
DI4	9	10	DO4
DI5	11	12	DO5
DI6	13	14	DO6
DI7	15	16	DO7
SMB_CLK	17	18	SMB_DATA
GND	19	20	+5V


2.4.12 SATA Power connector 1/2 (SPWR1/2)

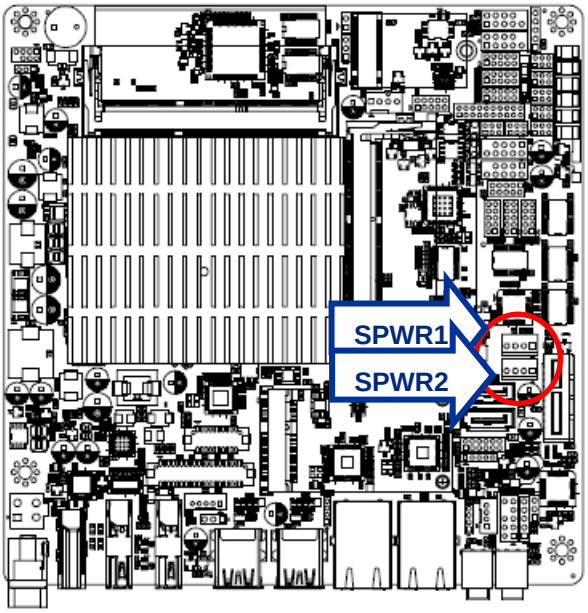




PIN	Signal
1	+V5S_SATA
2	GND
3	GND
4	+V12S_SATA


2.4.13 Power connector (PWR1)

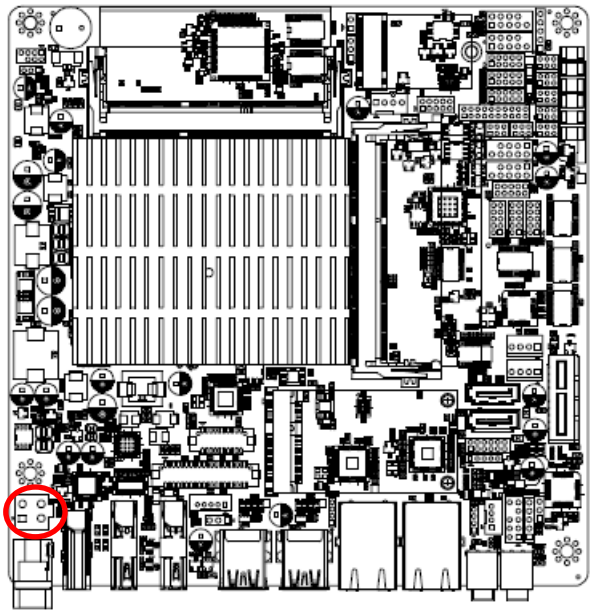




Signal	PIN	PIN	Signal
GND	1	2	GND
+V12-24_DCIN	3	4	+V12-24_DCIN


2.4.14 USB2.0 connector (USB3)

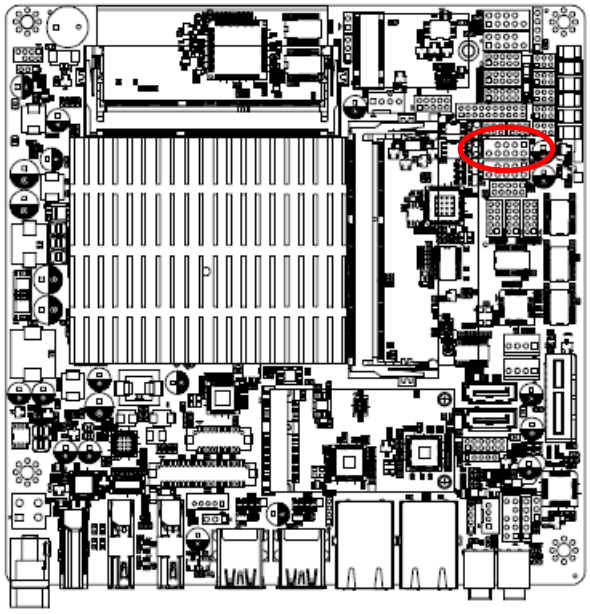




Signal	PIN	PIN	Signal
+5VSB	1	2	+5VSB
USBDN4	3	4	USBDN5
USBDP4	5	6	USBDP5
GND	7	8	GND
		10	NC


2.4.15 USB2.0 connector (USBH1)

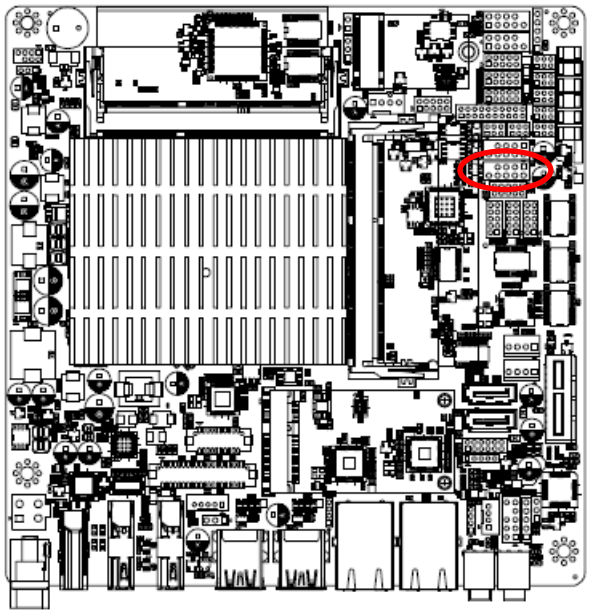




Signal	PIN	PIN	Signal
+5VSB	1	2	+5VSB
USB_HDN1	3	4	USB_HDN2
USB_ HDP1	5	6	USB_ HDP2
GND	7	8	GND
		10	NC


2.4.16 USB2.0 connector (USBH2)

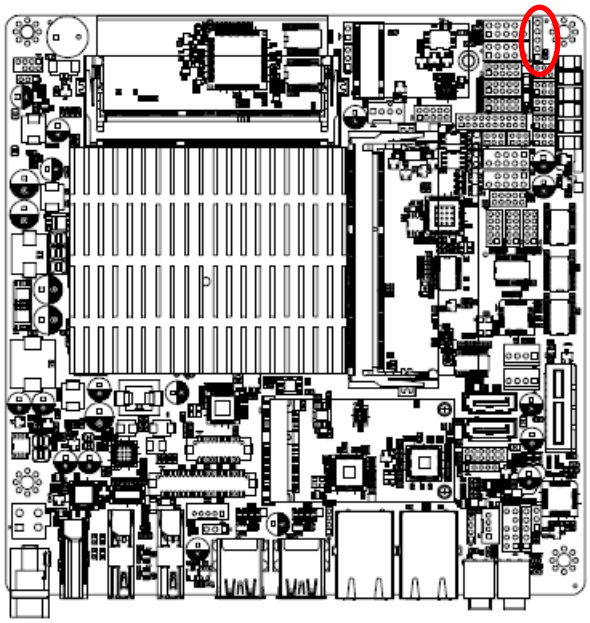




PIN	Signal
5	NC
4	GND
3	USB_ HDP4
2	USB_HDN4
1	+5VSB


2.4.17 LVDS connector (LVDS1)

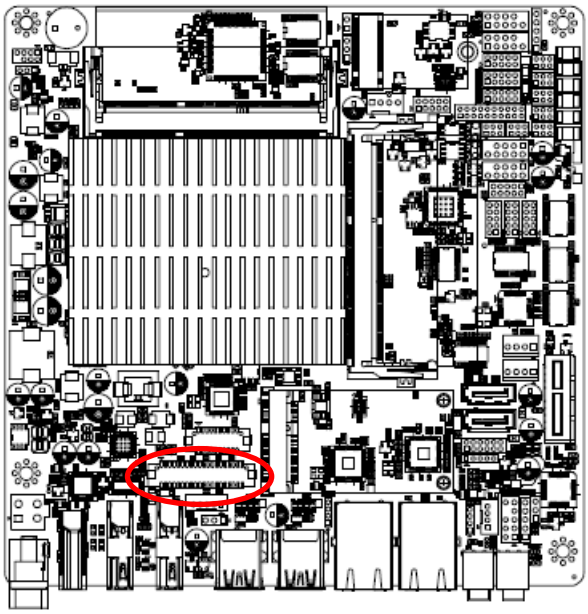




Signal	PIN	PIN	Signal
+3.3V	1	2	+5V
+3.3V	3	4	+5V
NC	5	6	NC
GND	7	8	GND
LVDS_DATAP1	9	10	LVDS_DATAP0
LVDS_DATAN1	11	12	LVDS_DATAN0
GND	13	14	GND
LVDS_DATAP3	15	16	LVDS_DATAP2
LVDS_DATAN3	17	18	LVDS_DATAN2
GND	19	20	GND
LVDS_DATAP5	21	22	LVDS_DATAP4
LVDS_DATAN5	23	24	LVDS_DATAN4
GND	25	26	GND
LVDS_DATAP7	27	28	LVDS_DATAP6
LVDS_DATAN7	29	30	LVDS_DATAN6
GND	31	32	GND
LVDS_CLK2P	33	34	LVDS_CLK1P
LVDS_ CLK2N	35	36	LVDS_ CLK1N
GND	37	38	GND
+12V	39	40	+12V


2.4.18 Battery connector (BT1)

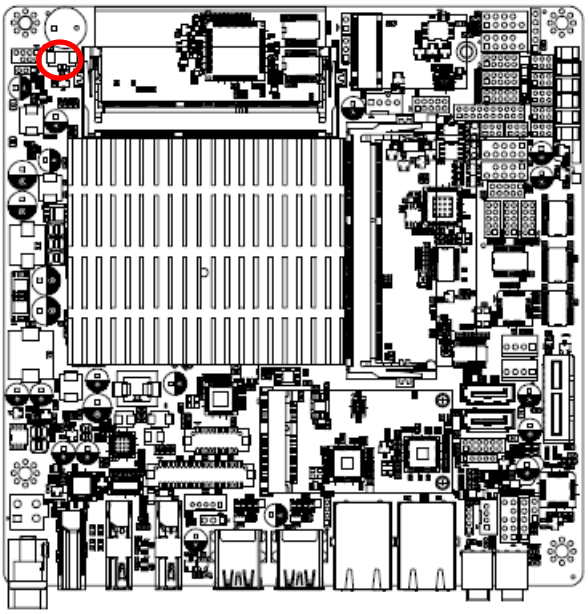




PIN	Signal
1	+3.3VSB
2	GND

2.4.19 Front Audio connector (FAUD1)

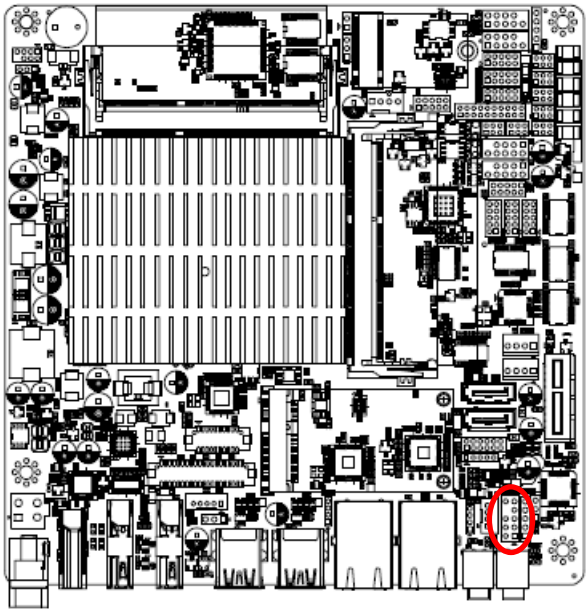





Signal	PIN	PIN	Signal
LINE2_JD	10	9	LINE2_L
		7	SENSE_B
MIC2_JD	6	5	LINE2_R
AUD_FRONT_DET	4	3	MIC2_R
GND	2	1	MIC2_L

2.4.19.1 Signal Description –Front Audio connector (FAUD1)

Signal	Signal Description
LINE2_JD	AUDIO IN (LINE_RIN/LIN)sense pin
MIC2_JD	MIC IN (MIC_RIN/LIN) sense pin


2.4.20 LPC connector (JLPC1)

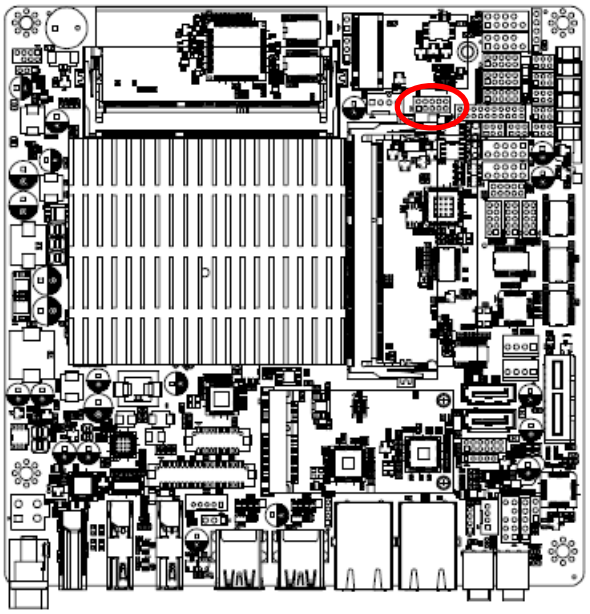




Signal	PIN	PIN	Signal
LPC_AD0	1	2	+3.3V
LPC_AD1	3	4	PLT_RST#
LPC_AD2	5	6	LPC_FRAME#
LPC_AD3	7	8	LPC_CLK_DEB
LPC_SERIRQ	9	10	GND


2.4.21 EC_Program (EC1)

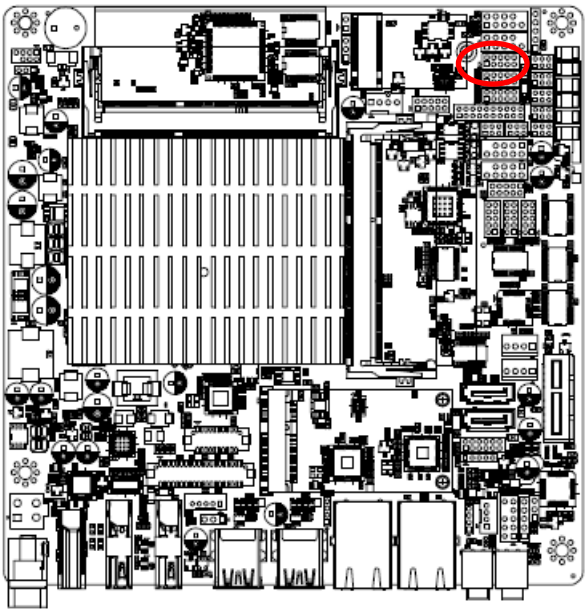




Signal	PIN	PIN	Signal
+3.3A_ECSPI	1	2	GND
EC_FSCE#	3	4	EC_FSCK
EC_FSMIOSO	5	6	EC_FSMOSI
EC_HOLD#	7	8	NC
EC_SMBCLK	9	10	EC_SMBDATA


2.4.22 SPI connector (SPI1)

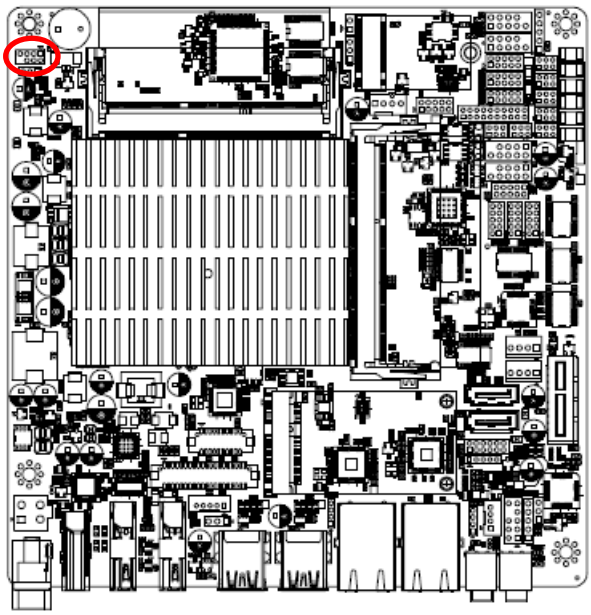




Signal	PIN	PIN	Signal
+1.8VSB	1	2	GND
SPI_CS0#	3	4	SPI_CLK
SPI_MISO	5	6	SPI_MOSI
SPI_HOLD#	7		


2.4.23 Sony/Philips Digital Interface (SPDIF1)

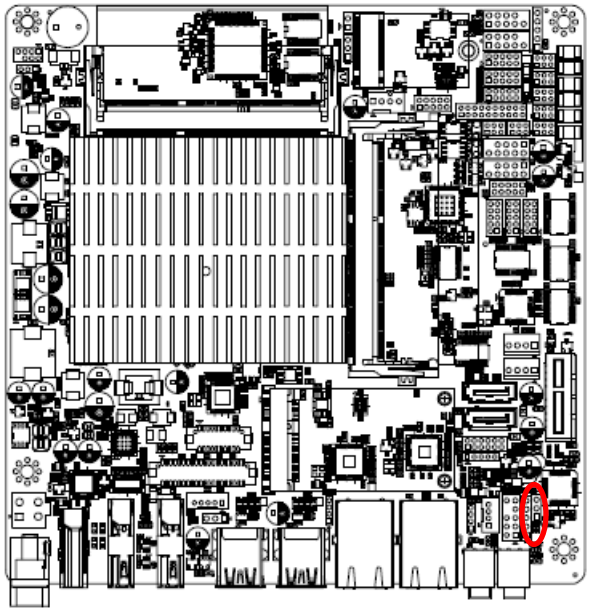



PIN	Signal
3	GND
2	SPDIF_OUT
1	+5V


2.4.24 Speaker connector (SPK1)

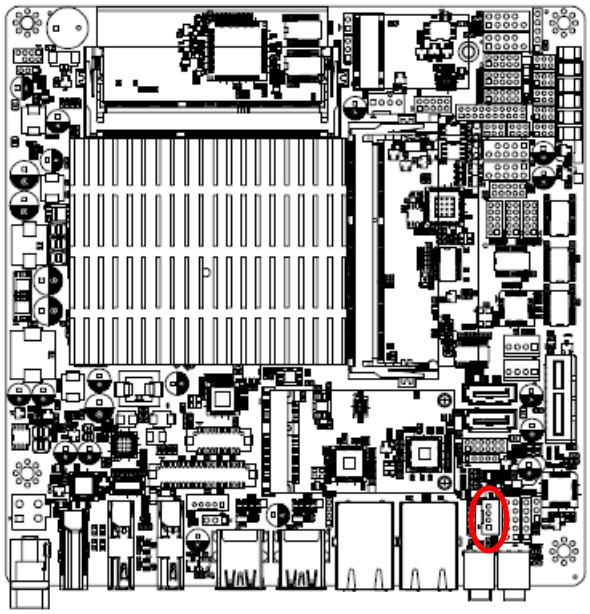




PIN	Signal
4	RSPK-
3	RSPK+
2	LSPK-
1	LSPK+


2.4.25 Front Panel connector 1 (FPT1)

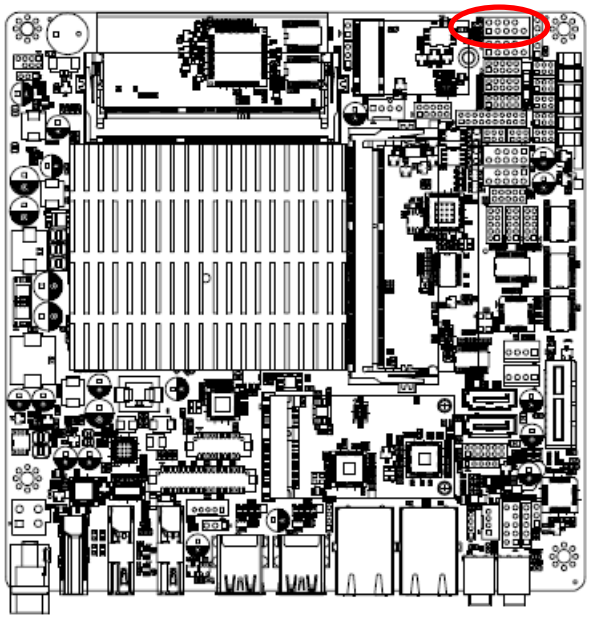




Signal	PIN	PIN	Signal
+HD_LED	1	2	+PWR_LED
-HD_LED	3	4	-PWE_LED
+Reset	5	6	+PWR_BNT
-Reset	7	8	-PWR_BNT
NC	9		

2.4.26 Front Panel connector 2 (FPT2)

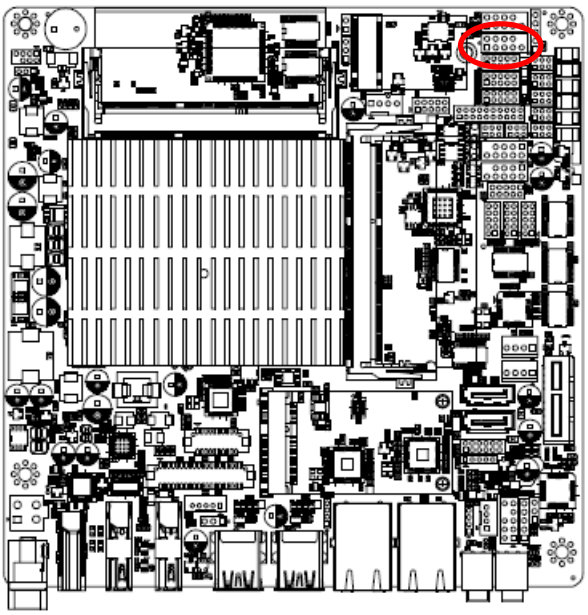




Signal	PIN	PIN	Signal
Speaker+	1	2	BLK_VR(10K)
NC	3	4	BLK_UP
NC	5	6	BLK_DN
Speaker-	7	8	GND
NC	9	10	

Note:

1. Pin2 with GND: Control LVDS Backlight by use Variable Resistor.
2. BLK_UP with GND/BLK_DN with GND: Step control LVDS Backlight by use button and BIOS must to be set “BR Button”. (Please refer to page.61)


2.4.27 LED indicator connector 1 (LED1)

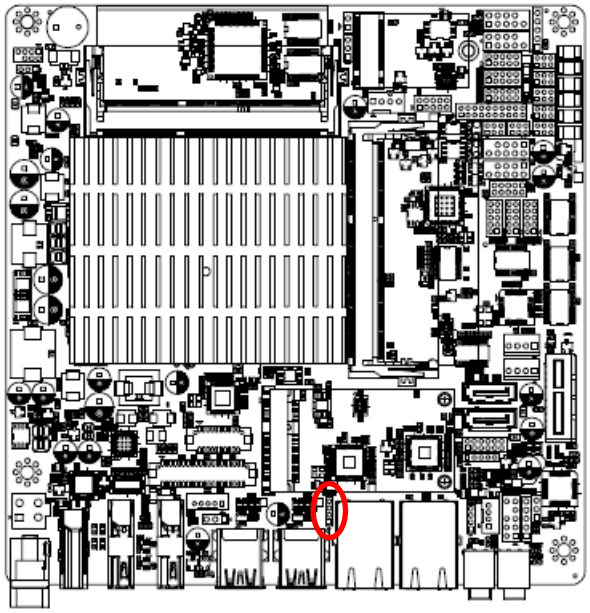



PIN	Signal
4	L1_1000#_LED
3	L1_100#_LED
2	L1_ACT_N
1	L1_ACT_P


2.4.28 LED indicator connector 2 (LED2)

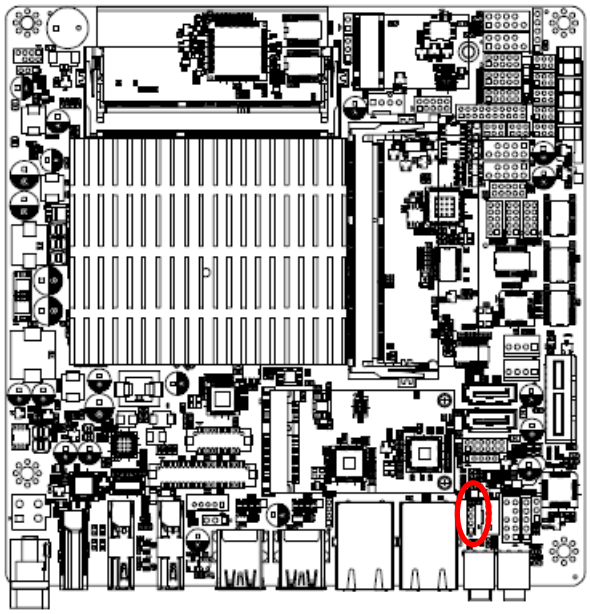




PIN	Signal
4	L2_1000#_LED
3	L2_100#_LED
2	L2_ACT_N
1	L2_ACT_P


2.4.29 CPU fan connector (FAN1)

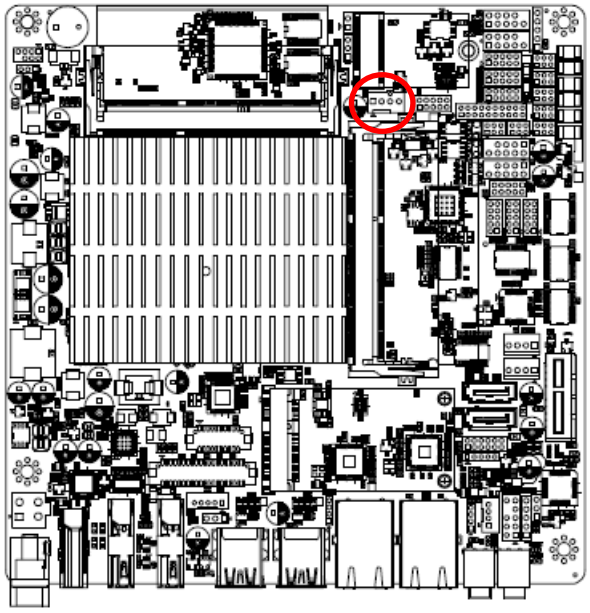




PIN	Signal
1	GND
2	+12V
3	CPU_FANIN
4	CPU_FANOUT


2.4.30 Digital Microphone connector (DMIC1)

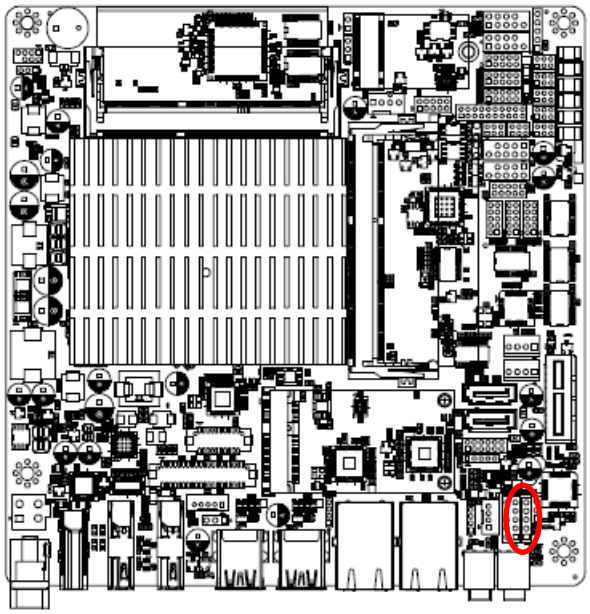




PIN	Signal
5	
4	DMIC_CLK
3	GND
2	DMIC_DAT
1	+3.3VSB


2.4.31 eDP connector (EDP1)

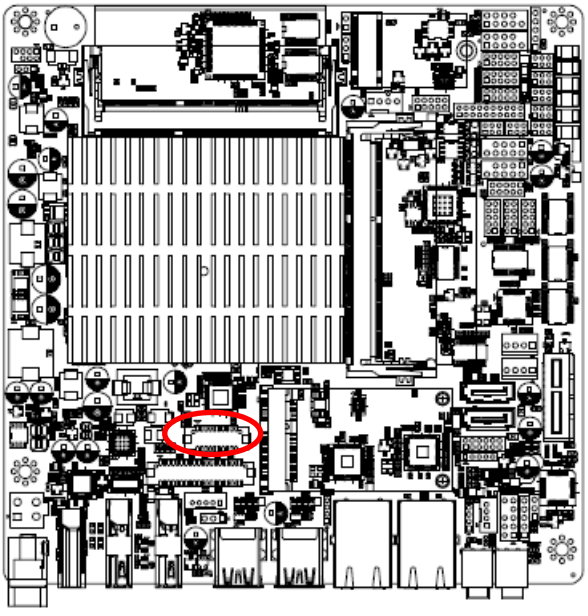




Signal	PIN	PIN	Signal
GND	1	2	GND
EDP_TXN0	3	4	EDP_TXN3
EDP_TXP0	5	6	EDP_TXP3
GND	7	8	NC
EDP_TXN1	9	10	GND
EDP_TXP1	11	12	EDP_AUXN
GND	13	14	EDP_AUXP
EDP_TXN2	15	16	GND
EDP_TXP2	17	18	EDP_C_HPD
EDP_VCC_PAL	19	20	EDP_VCC_PAL

2.4.32 I2C connector (I2C1)

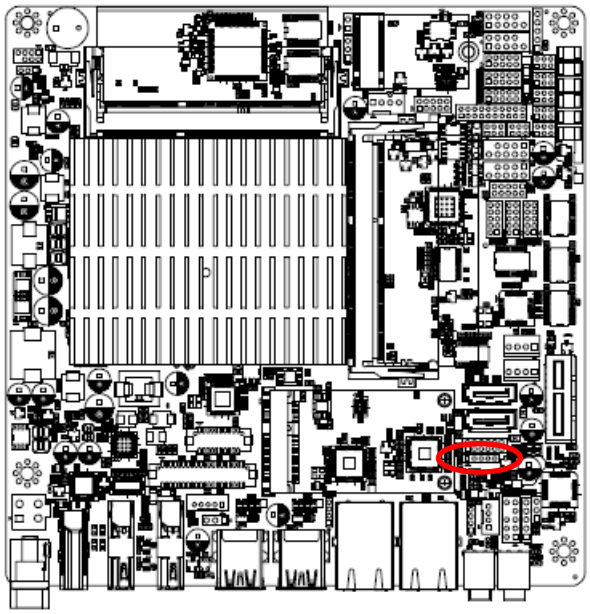



PIN	Signal
1	+3.3V
2	I2C5_INT#
3	I2C5_LS_CLK
4	I2C5_LS_DATA
5	GND

3.BIOS Setup

3.1 Introduction

The BIOS setup program allows users to modify the basic system configuration. In this following chapter will describe how to access the BIOS setup program and the configuration options that may be changed.

3.2 Starting Setup

The AMI BIOS™ is immediately activated when you first power on the computer. The BIOS reads the system information contained in the NVRAM and begins the process of checking out the system and configuring it. When it finishes, the BIOS will seek an operating system on one of the disks and then launch and turn control over to the operating system.

While the BIOS is in control, the Setup program can be activated in one of two ways:
By pressing <Del> or <F2> immediately after switching the system on, or
By pressing the <Del> or <F2> key when the following message appears briefly at the left-top of the screen during the POST (Power On Self Test).

Press <Del> or <F2> to enter SETUP

If the message disappears before you respond and you still wish to enter Setup, restart the system to try again by turning it OFF then ON or pressing the "RESET" button on the system case. You may also restart by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys. If you do not press the keys at the correct time and the system does not boot, an error message will be displayed and you will again be asked to.

Press F1 to Continue, DEL to enter SETUP

3.3 Using Setup

In general, you use the arrow keys to highlight items, press <Enter> to select, use the PageUp and PageDown keys to change entries, press <F1> for help and press <Esc> to quit. The following table provides more detail about how to navigate in the Setup program using the keyboard.

Button	Description
↑	Move to previous item
↓	Move to next item
←	Move to the item in the left hand
→	Move to the item in the right hand
Esc key	Main Menu -- Quit and not save changes into NVRAM Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
+ key	Increase the numeric value or make changes
- key	Decrease the numeric value or make changes
F1 key	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2 key	Previous Values.
F3 key	Optimized defaults
F4 key	Save & Exit Setup

- **Navigating Through The Menu Bar**

  Use the left and right arrow keys to choose the menu you want to be in.



Note: Some of the navigation keys differ from one screen to another.

- **To Display a Sub Menu**

  Use the arrow keys to move the cursor to the sub menu you want. Then press <Enter>. A "➢" pointer marks all sub menus.

3.4 Getting Help

Press F1 to pop up a small help window that describes the appropriate keys to use and the possible selections for the highlighted item. To exit the Help Window press <Esc> or the F1 key again.

3.5 In Case of Problems

If, after making and saving system changes with Setup, you discover that your computer no longer is able to boot, the AMI BIOS supports an override to the NVRAM settings which resets your system to its defaults.


The best advice is to only alter settings which you thoroughly understand. To this end, we strongly recommend that you avoid making any changes to the chipset defaults. These defaults have been carefully chosen by both BIOS Vendor and your systems manufacturer to provide the absolute maximum performance and reliability. Even a seemingly small change to the chipset setup has the potential for causing you to use the override.


3.6 BIOS setup

Once you enter the Aptio Setup Utility, the Main Menu will appear on the screen. The Main Menu allows you to select from several setup functions and exit choices. Use the arrow keys to select among the items and press <Enter> to accept and enter the sub-menu.

3.6.1 Main Menu

This section allows you to record some basic hardware configurations in your computer and set the system clock.

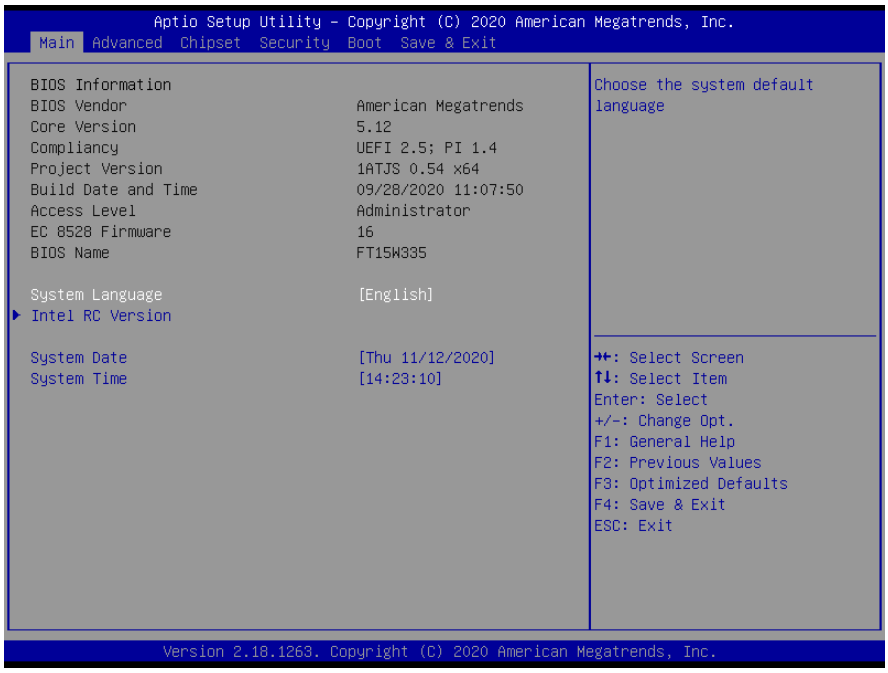

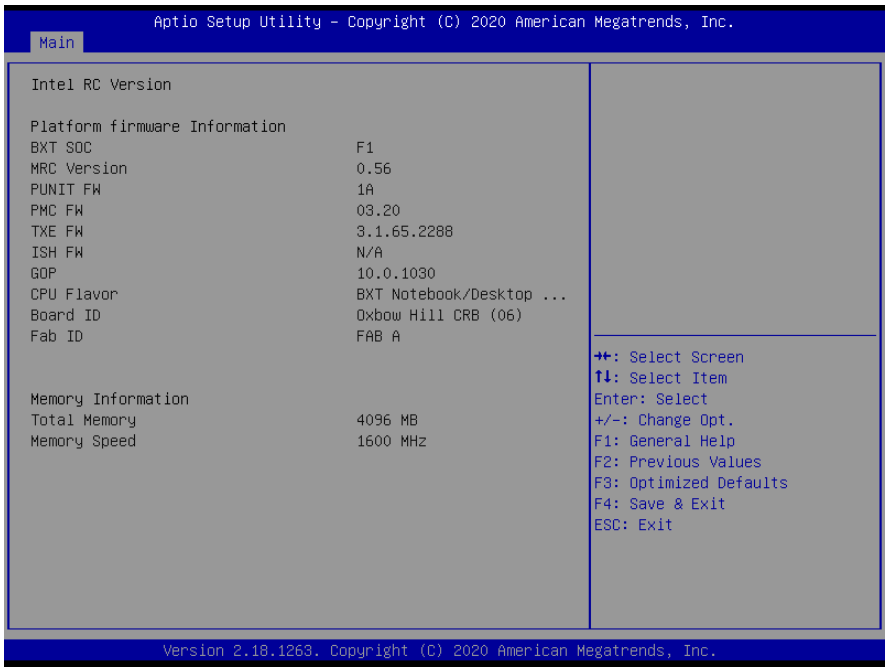

3.6.1.1 System Language

This option allows choosing the system default language.

3.6.1.2 System Date

Use the system date option to set the system date. Manually enter the month, day and year.


3.6.1.3 System Time

Use the system time option to set the system time. Manually enter the hours, minutes and seconds.


Note: The BIOS setup screens shown in this chapter are for reference purposes only, and may not exactly match what you see on your screen.
Visit the Avalue website (www.avalue.com) to download the latest product and BIOS information.

3.6.2 Advanced Menu

This section allows you to configure your CPU and other system devices for basic operation through the following sub-menus.

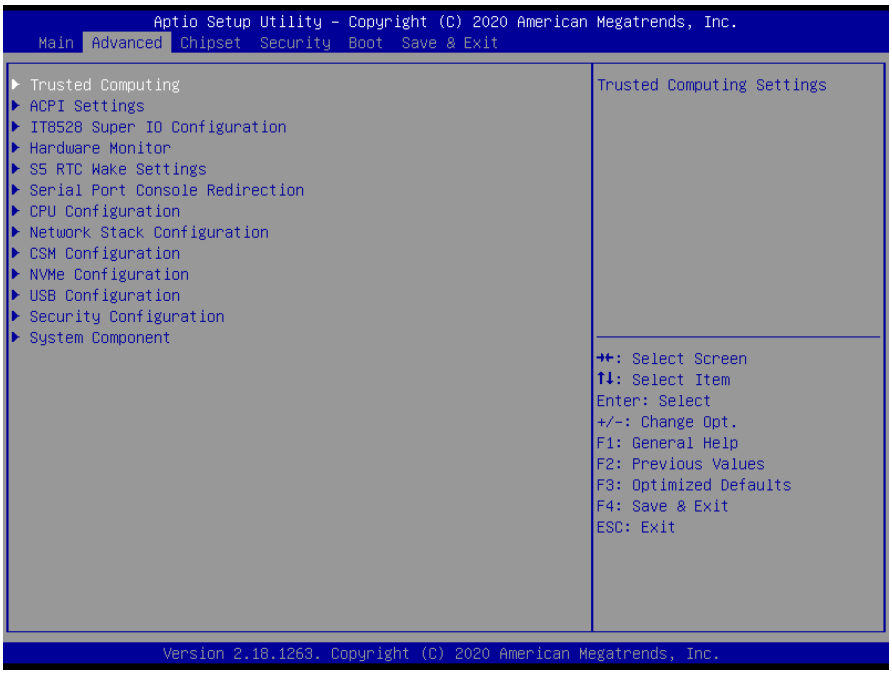


3.6.2.1 Trusted Computing

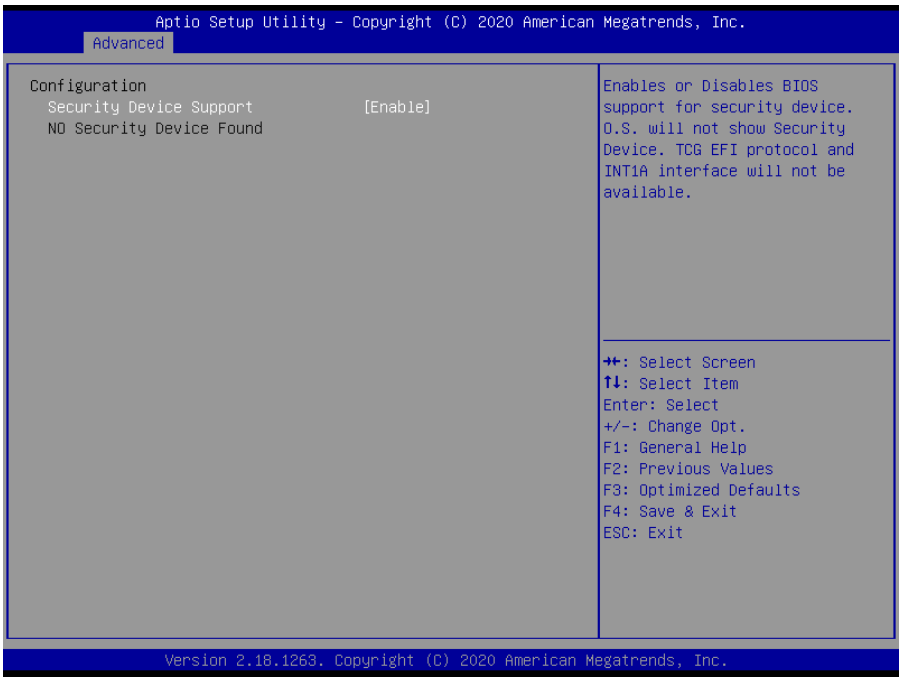

Item	Options	Description
Security Device Support	Disable, Enable**[Default]**	Enables or Disables BIOS support for security device. O.S. will not show Security Device. TCG EFI protocol and INT1Ainterface will not be available.

3.6.2.2 ACPI Settings

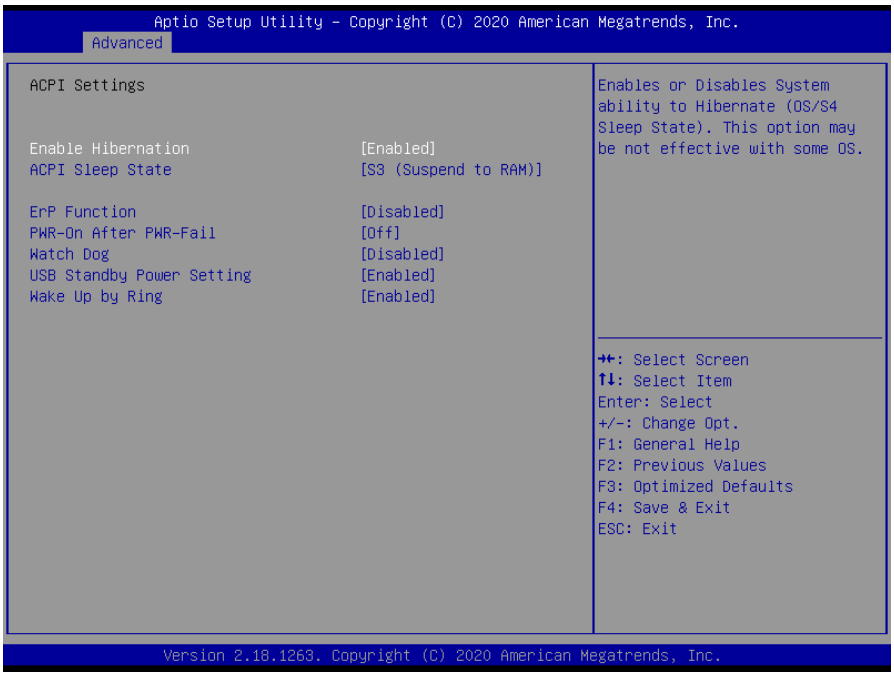


Item	Options	Description
Enable Hibernation	Disabled Enabled**[Default]**,	Enables or Disables System ability to Hibernate (OS/S4 Sleep State). This option may be not effective with some

		OS.
ACPI Sleep State	Suspend Disabled, S3 (Suspend to RAM)**[Default]**	Select the highest ACPI sleep state the system will enter when the SUSPEDN button is pressed.
ErP Function	Disabled**[Default]**, Enabled	ErP Function (Deep S5).
PWR-On After PWR-Fail	Off**[Default]** On Last state	AC loss resume.
Watch Dog	Disabled**[Default]**, 30 sec 40 sec 50 sec 1 min 2 min 10 min 30 min	Select WatchDog.
USB Standby Power Setting	Disabled Enabled**[Default]**,	Enabled/Disabled USB Standby Power during S3/S4/S5.
Wake Up by Ring	Disabled Enabled**[Default]**,	Wake Up by Ring from S3/S4/S5.

3.6.2.3 IT8528 Super IO Configuration


You can use this item to set up or change the IT8528 Super IO configuration for serial ports. Please refer to 3.6.2.3.1~ 3.6.2.3.5 for more information.

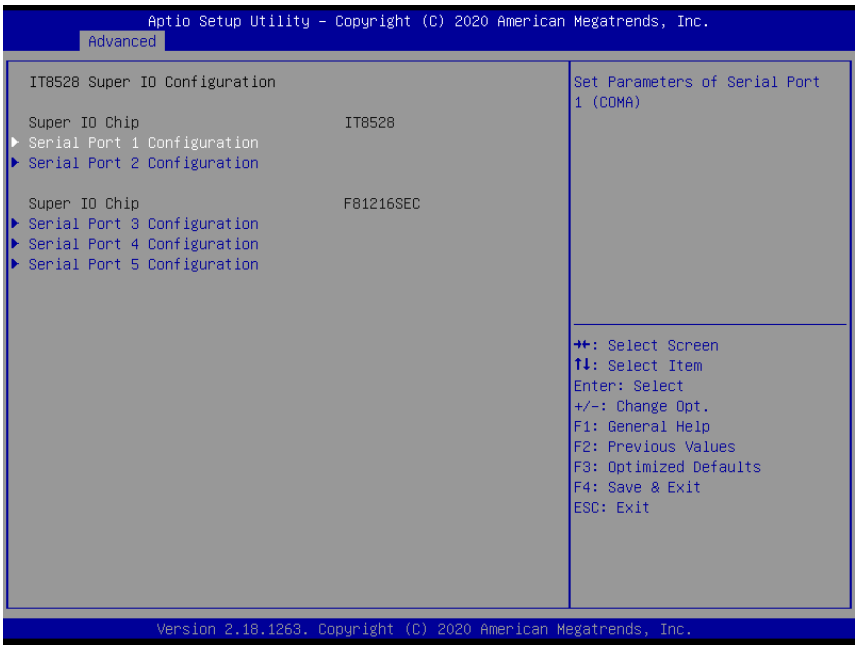

Item	Description
Serial Port 1 Configuration	Set Parameters of Serial Port 1 (COMA).


Serial Port 2 Configuration	Set Parameters of Serial Port 2 (COMB).
Serial Port 3 Configuration	Set Parameters of Serial Port 3 (COMC).
Serial Port 4 Configuration	Set Parameters of Serial Port 4 (COMD).
Serial Port 5 Configuration	Set Parameters of Serial Port 5 (COME).

3.6.2.3.1 Serial Port 1 Configuration

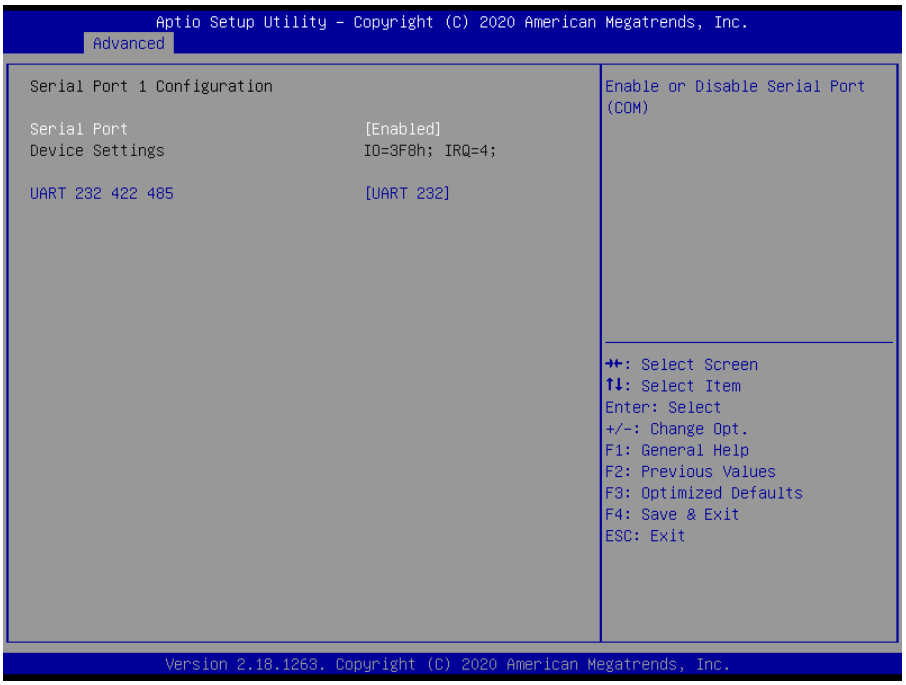


Item	Option	Description
Serial Port	Enabled**[Default]**, Disabled	Enable or Disable Serial Port (COM).
UART 232 422 485	UART 232**[Default]**, UART 422, UART 485	Change the Serial Port as RS232/422/485.

3.6.2.3.2 Serial Port 2 Configuration

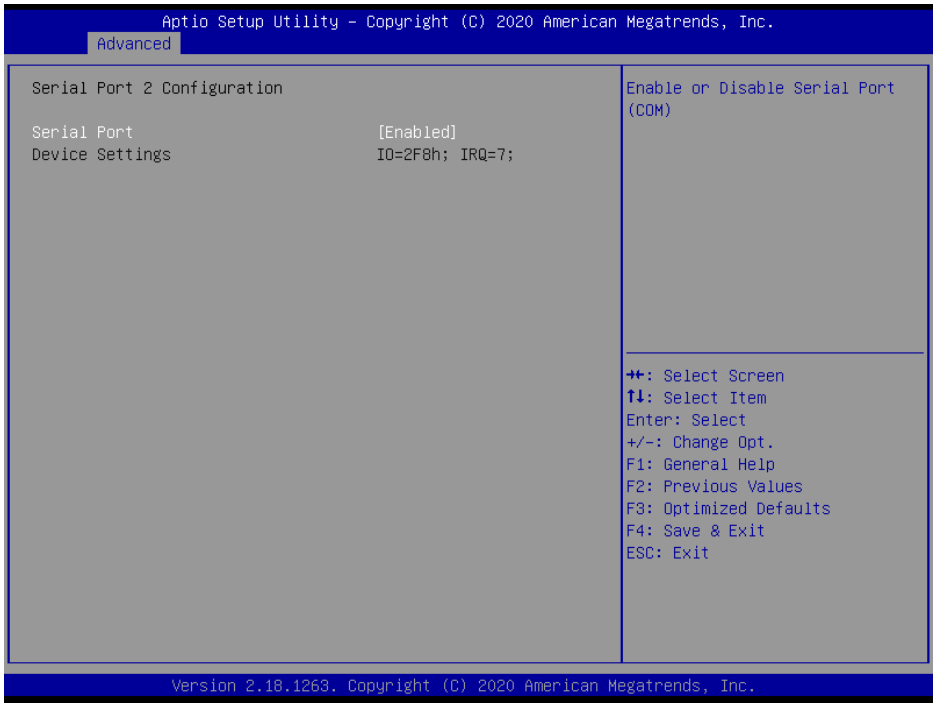


Item	Option	Description
Serial Port	Enabled**[Default]**, Disabled	Enable or Disable Serial Port (COM).

3.6.2.3.3 Serial Port 3 Configuration

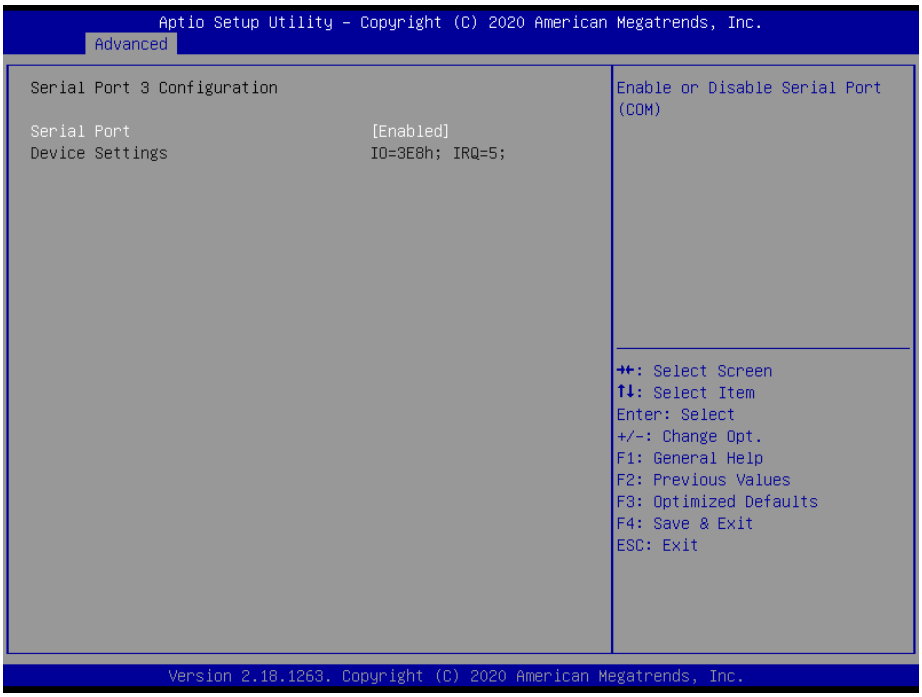


Item	Option	Description
Serial Port	Enabled**[Default]**, Disabled	Enable or Disable Serial Port (COM).

3.6.2.3.4 Serial Port 4 Configuration

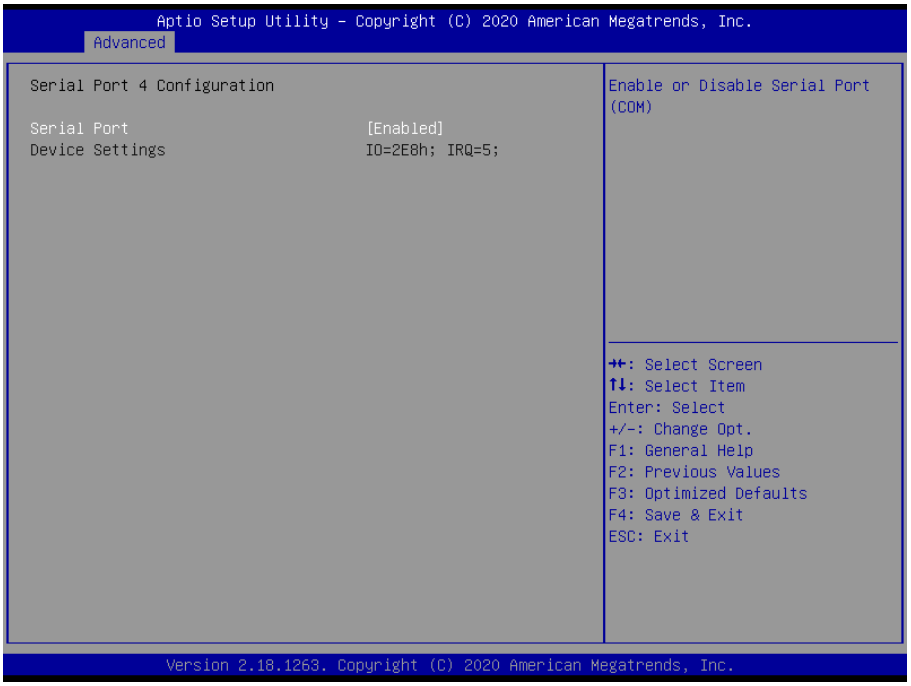


Item	Option	Description
Serial Port	Enabled**[Default]**, Disabled	Enable or Disable Serial Port (COM).

3.6.2.3.5 Serial Port 5 Configuration

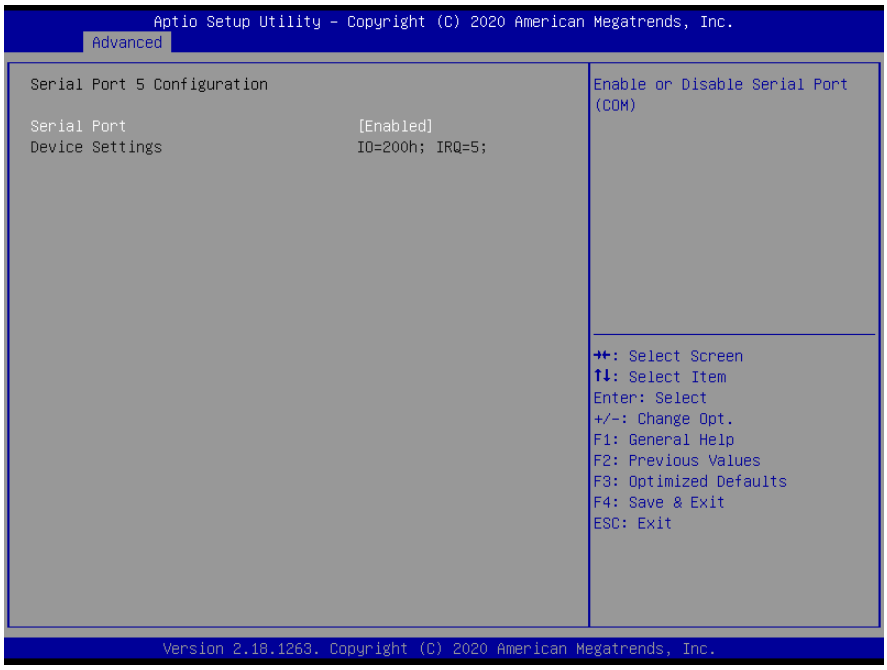


Item	Option	Description
Serial Port	Enabled**[Default]**, Disabled	Enable or Disable Serial Port (COM).

3.6.2.4 H/W Monitor

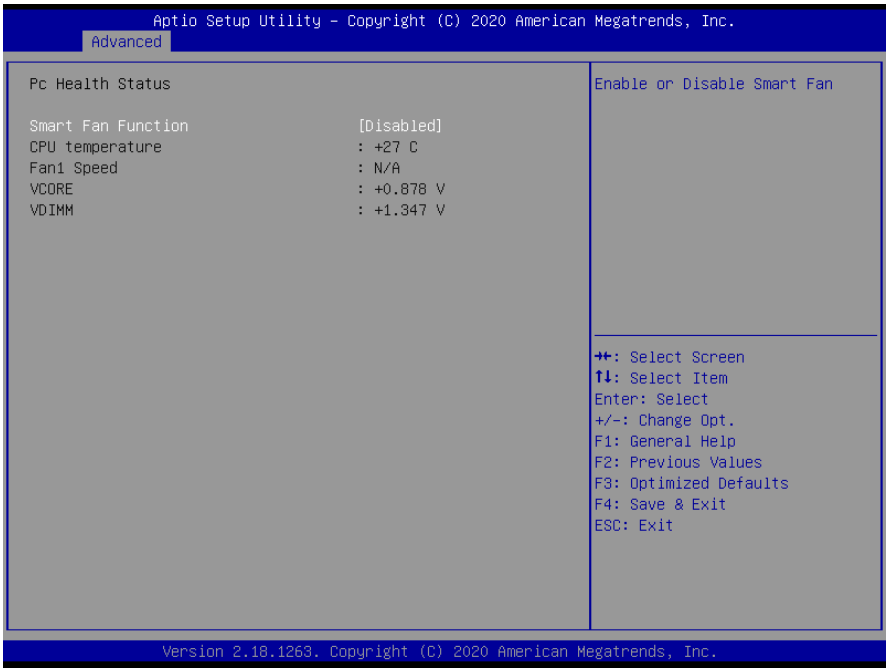

Item	Options	Description
Smart Fan Function	Enabled, Disabled**[Default]**	Enable or Disable Smart Fan.


3.6.2.4.1 Smart Fan Mode Configuration

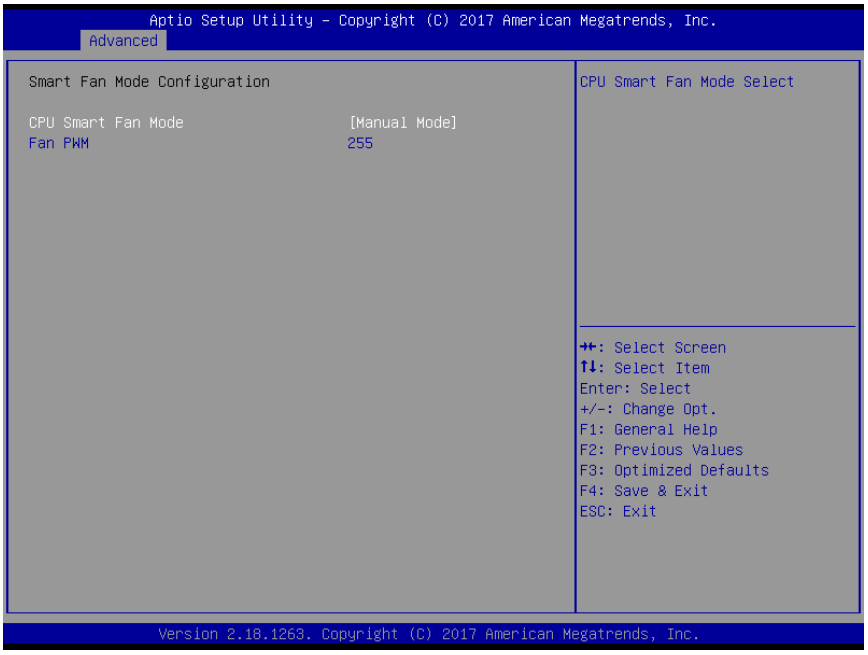


Item	Option	Description
CPU Smart Fan Mode	Manual Mode**[Default]**/Mode 01/Mode 02/Mode 03/Mode 04/Mode 05/Mode 06/Mode	CPU Smart Fan Mode Select.

	07/Mode 08/Mode 09/Mode 10/Mode 11/Mode 12/Mode 13/Mode 14/Mode 15/Mode 16/Mode 17/Mode 18/Mode 19/Mode 20	
Fan PWM	0-255	Fan PWM duty.

3.6.2.5 S5 RTC Wake Settings

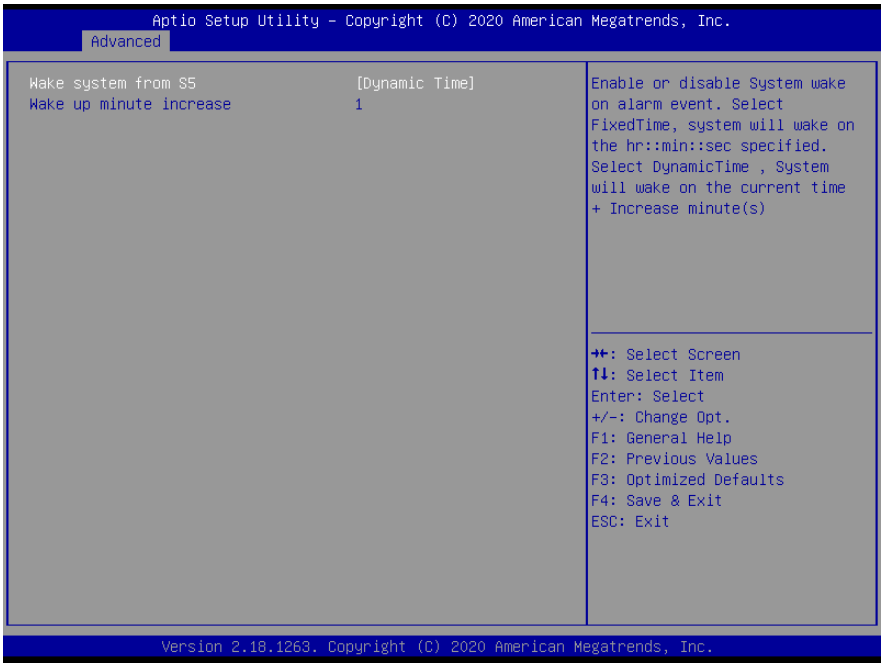


Item	Options	Description
Wake system from S5	Disabled**[Default]**, Fixed Time Dynamic Time	Enable or disable System wake on alarm event. Select Fixed Time, system will wake on the hr::min::sec specified. Select Dynamic Time, System will wake on the current time + Increase minute(s).
Wake up minute increase	1-5	Wake up minute increase.

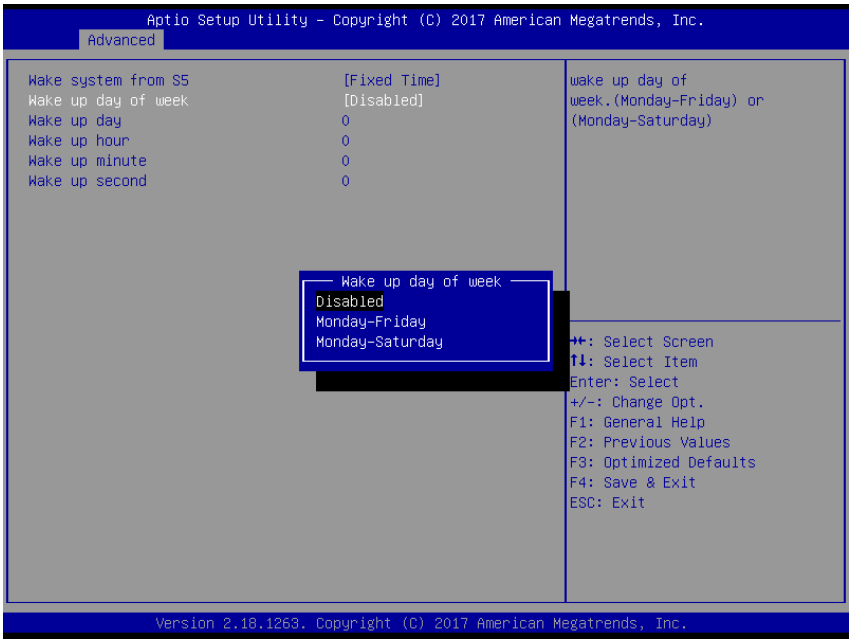

Item	Options	Description
Wake system from S5	Disabled, Fixed Time**[Default]** Dynamic Time	Enable or disable System wake on alarm event. Select Fixed Time, system will wake on the hr::min::sec specified. Select Dynamic Time, System will wake on the current time + Increase minute(s).
Wake up day of week	Disabled**[Default]** Monday-Friday Monday-Saturday	Wake up day of week. (Monday-Friday) or (Monday-Saturday).
Wake up day	1-31	Select 0 for daily system wake up 1-31 for which day of the month that you would like the system to wake up.
Wake up hour	0-23	Select 0-23 For example enter 3 for 3am and 15 for 3pm.
Wake up minute	0-23	Select 0-23 For example enter 3 for 3am and 15 for 3pm.
Wake up second	0-23	Select 0-23 For example enter 3 for 3am and 15 for 3pm.


3.6.2.6 Serial Port Console Redirection

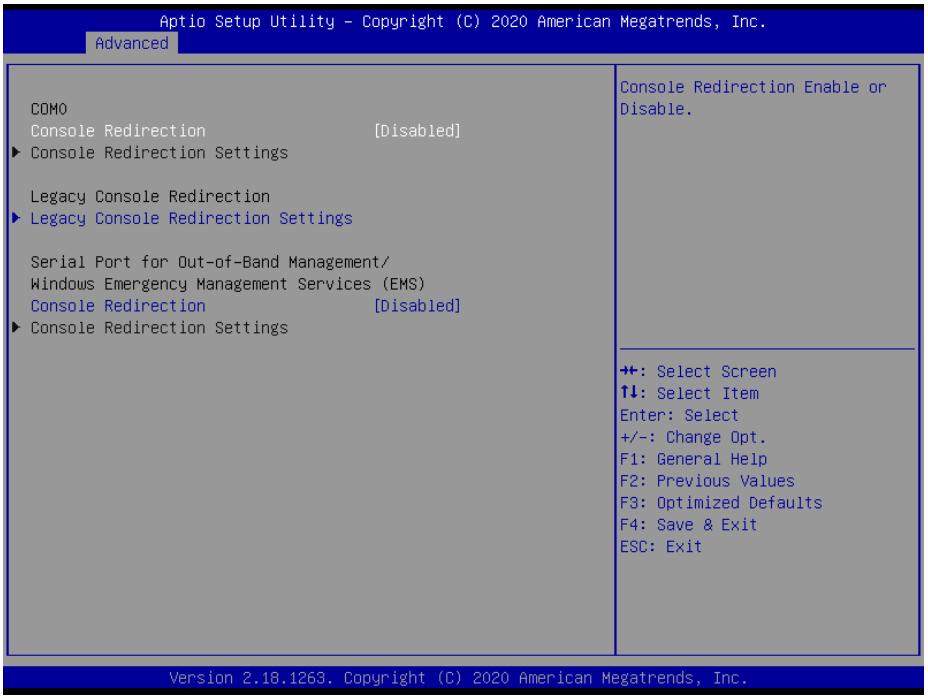

Item	Options	Description
Console Redirection	Disabled**[Default]**, Enabled	Console Redirection Enable or Disable.


3.6.2.7 CPU Configuration

Use the CPU configuration menu to view detailed CPU specification and configure the CPU.

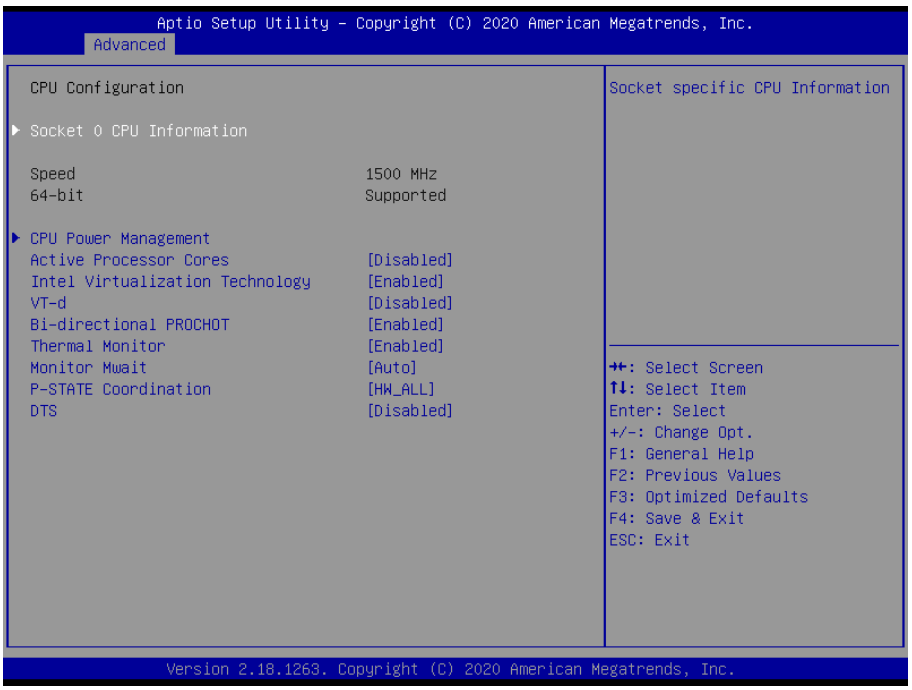


Item	Options	Description
Active Processor Cores	Disabled**[Default]**, Enabled	Number of cores to enable in each processor package.
Intel Virtualization Technology	Disabled, Enabled**[Default]**	When enabled, a VMM can utilize the additional hardware capabilities provided by Virtualization Technology.
VT-d	Disabled**[Default]**, Enabled	Enable/Disable CPU VT-d.
Bi-directional PROCHOT	Disabled, Enabled**[Default]**	When a processor thermal sensor trips (either core), the PROCHOT# will be driven. If bi-direction is enabled, external agents can drive PROCHOT# to throttle the processor.
Thermal Monitor	Disabled, Enabled**[Default]**	Enable/Disable Thermal Monitor.
Monitor Mwait	Disabled, Enabled Auto**[Default]**	Enable/Disable Monitor Mwait.
P-STATE Coordination	HW_ALL**[Default]** SW_ALL SW_ANY	Change P-STATE Coordination type.
DTS	Disabled**[Default]**, Enabled	Enable/Disable Digital Thermal Sensor.

3.6.2.7.1 Socket 0 CPU Information

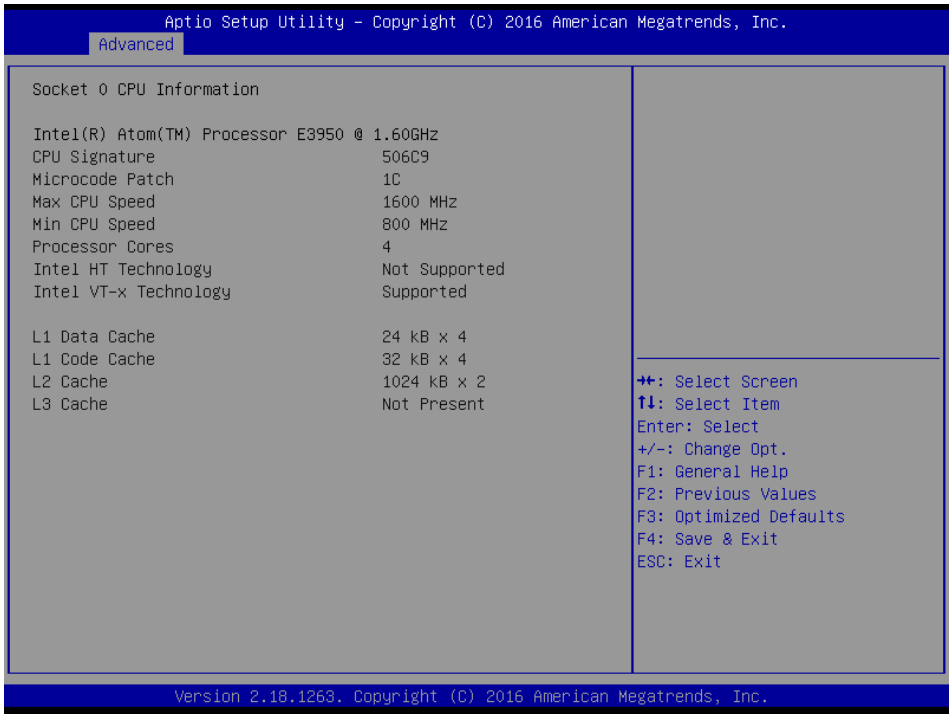


3.6.2.7.2 CPU Power Management Configuration

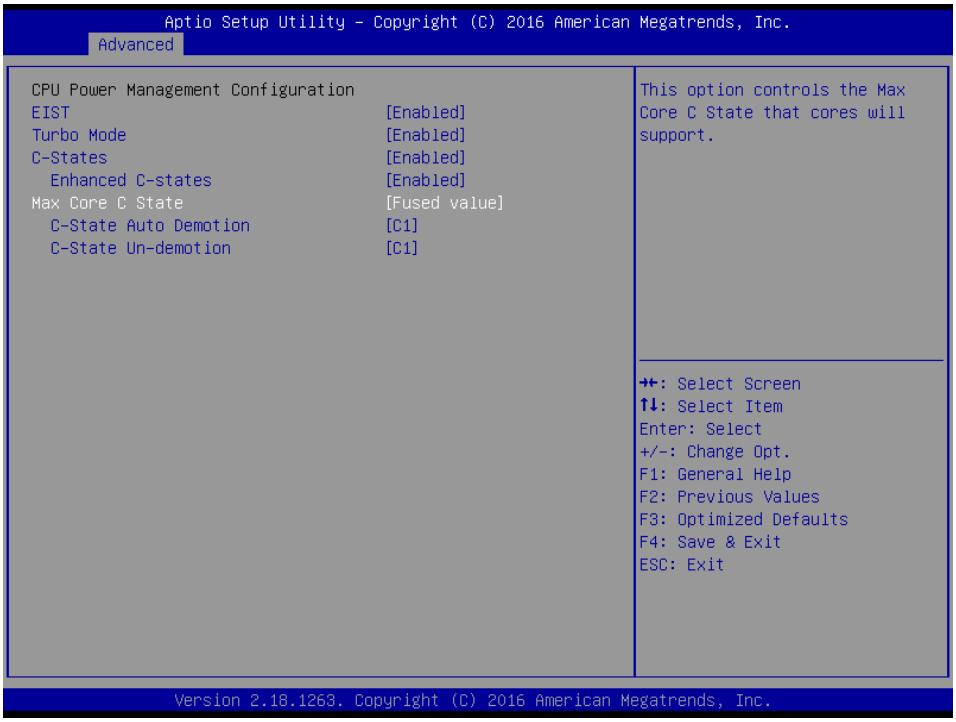


Item	Options	Description
EIST	Disabled, Enabled**[Default]**	Enable/Disable Intel SpeedStep.
Turbo Mode	Disabled, Enabled**[Default]**	Turbo Mode.
C-States	Disabled, Enabled**[Default]**	Enable/Disable C State.
Enhanced C-states	Disabled, Enabled**[Default]**	Enable/Disable C1E. When enabled, CPU will switch to minimum speed when all cores enter C-State.
Max Core C State	Fused value**[Default]** Core C10 Core C9 Core C8 Core C7 Core C6 Core C1 Unlimited	This option controls the Max Core C State that cores will support.
C-State Auto Demotion	Disabled C1**[Default]**	Configure C-State Auto Demotion.
C-State Un-demotion	Disabled C1**[Default]**	Configure C-State Un-demotion.

3.6.2.8 Network Stack Configuration

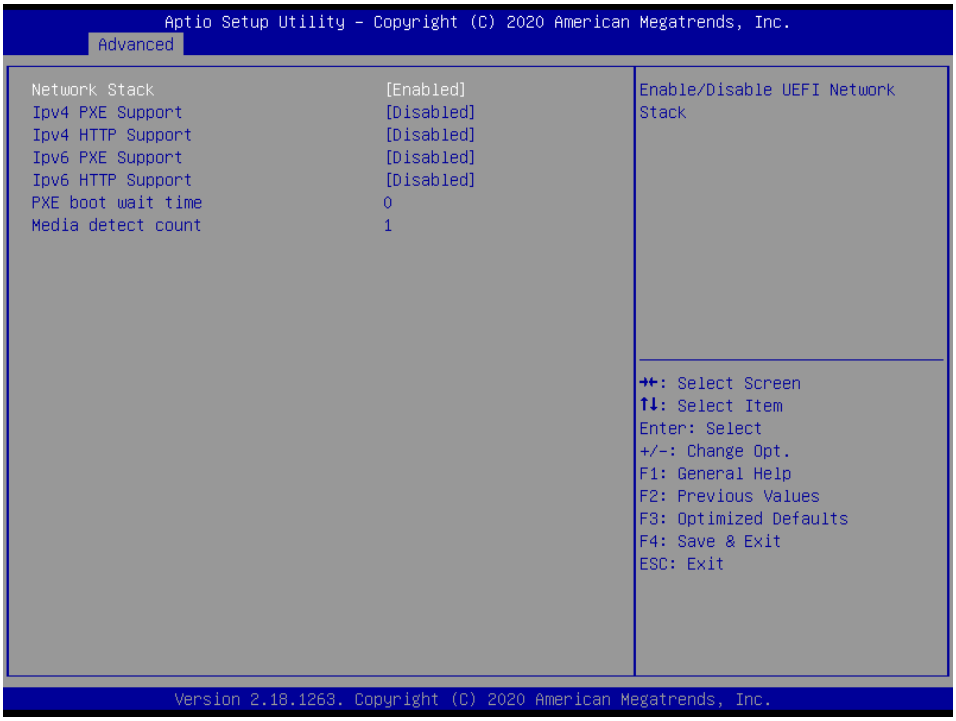


Item	Options	Description
Network Stack	Disabled**[Default]** Enabled	Enable/Disable UEFI Network Stack.
Ipv4 PXE Support	Disabled**[Default]** Enabled	Enable Ipv4 PXE Boot Support. If disabled IPV4 PXE boot option will not be created.
Ipv4 HTTP Support	Disabled**[Default]** Enabled	Enable Ipv4 HTTP Boot Support. If disabled IPV4 HTTP boot option will not be created.
Ipv6 PXE Support	Disabled**[Default]** Enabled	Enable Ipv6 PXE Boot Support. If disabled IPV6 PXE boot option will not be created.
Ipv6 HTTP Support	Disabled**[Default]** Enabled	Enable Ipv6 HTTP Boot Support. If disabled IPV6 HTTP boot option will not be created.
PXE boot wait time	0	Wait time to press ESC key to abort the PXE boot.
Media detect count	1	Number of times presence of media will be checked.

3.6.2.9 NVMe Configuration

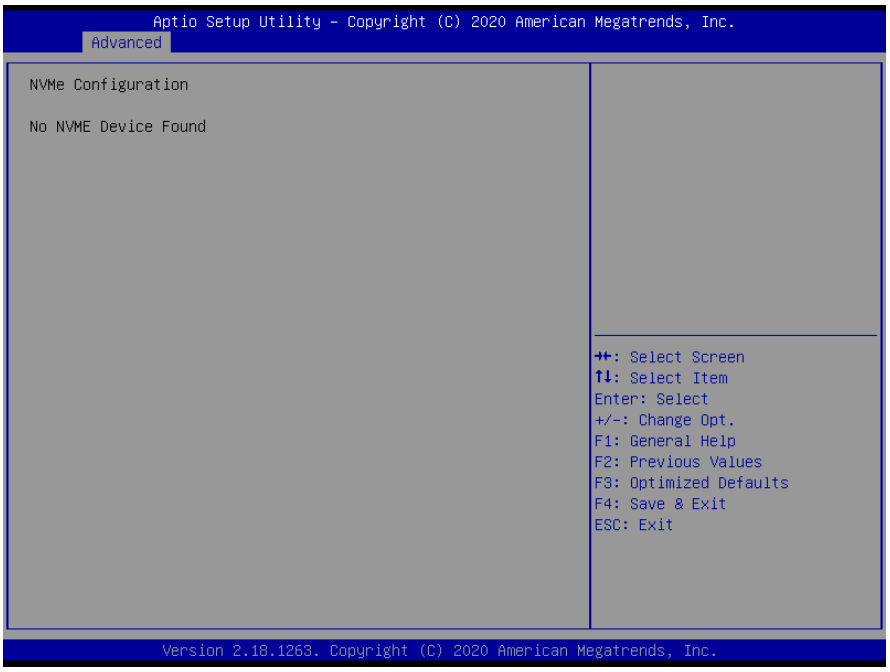

3.6.2.10 CSM Configuration

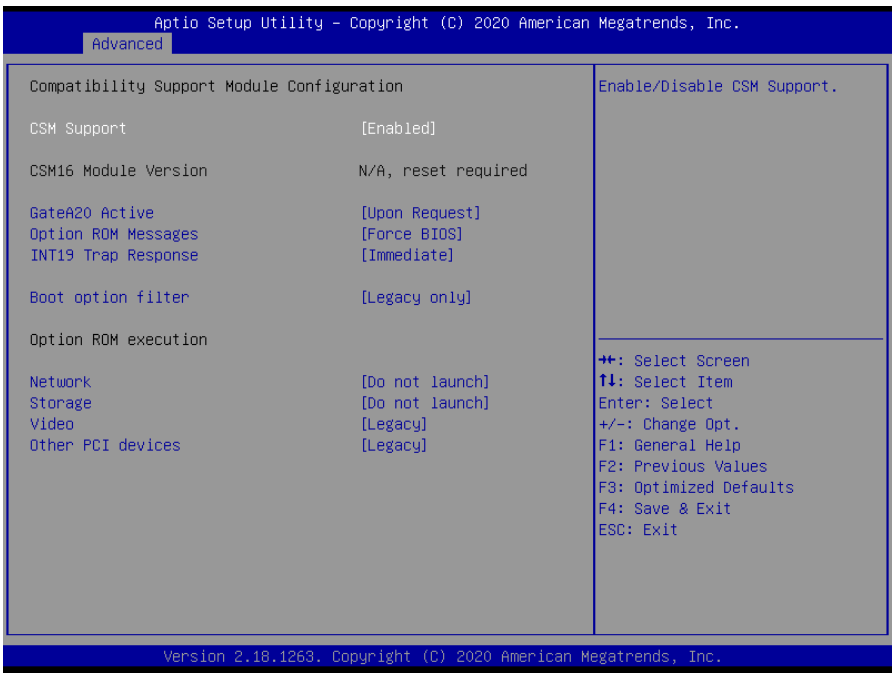


Item	Options	Description
CSM Support	Disabled**[Default]**, Enabled	Enable/Disable CSM Support.
GateA20 Active	Upon Request**[Default]** Always	UPON REQUEST – GA20 can be disabled using BIOS services. ALWAYS – do not allow disabling GA20; this option is useful when any RT code is executed above 1MB.

Option ROM Messages	Force BIOS Keep Current**[Default]**	Set display mode for Option ROM.
INT19 Trap Response	Immediate**[Default]** Postponed	BIOS reaction on INT19 trapping by Option ROM: IMMEDIATE – execute the trap right away; POSTPONED – execute the trap during legacy boot.
Boot option filter	UEFI and Legacy Legacy only**[Default]** UEFI only	This option controls Legacy/UEFI ROMs priority.
Network	Do not launch**[Default]** UEFI Legacy	Controls the execution of UEFI and Legacy PXE OpROM.
Storage	Do not launch**[Default]** UEFI Legacy	Controls the execution of UEFI and Legacy Storage OpROM.
Video	Do not launch UEFI Legacy**[Default]**	Controls the execution of UEFI and Legacy Video OpROM.
Other PCI devices	Do not launch UEFI Legacy**[Default]**	Determines OpROM execution policy for devices other than Network, Storage, or Video.

3.6.2.11 USB Configuration


The USB Configuration menu helps read USB information and configures USB settings.

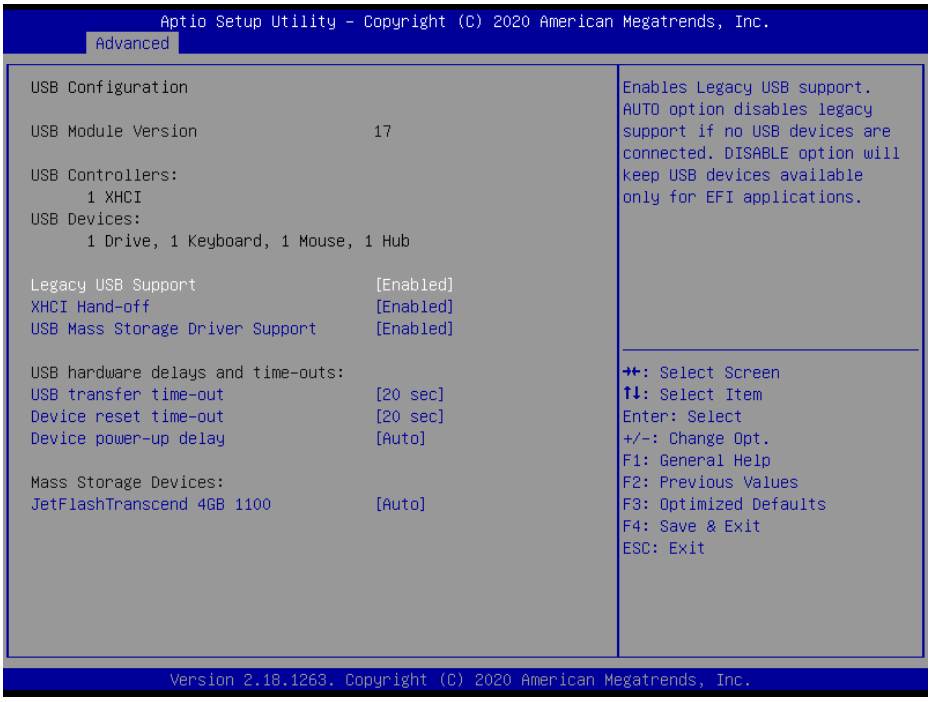

Item	Options	Description
Legacy USB Support	Enabled**[Default]** Disabled Auto	Enables Legacy USB support. AUTO option disables legacy support if no USB devices are connected. DISABLE option will keep USB devices available only for EFI applications.


XHCI Hand-off	Enabled**[Default]** Disabled	This is a workaround for OSew without XHCI hand-off support. The XHCI ownership change should be claimed by XHCI driver.
USB Mass Storage Driver Support	Disabled Enabled**[Default]**	Enable/Disable USB Mass Storage Driver Support.
USB transfer time-out	1 sec 5 sec 10 sec 20 sec**[Default]**	The time-out value for Control, Bulk, and Interrupt transfers.
Device reset time-out	10 sec 20 sec**[Default]** 30 sec 40 sec	USB mass storage device Start Unit command time-out.
Device power-up delay	Auto**[Default]** Manual	Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses default value: for a Root port it is 100ms, for a Hub port the delay is taken form Hub descriptor.
Mass Storage Devices	Auto**[Default]** Floppy Forced FDD Hard Disk CD-ROM	Mass storage device emulation type 'AUTO' enumerates devices according to their media format. Optical drives are emulated as 'CDROM', drives with no media will be emulated according to a drive type.

3.6.2.12 Security Configuration

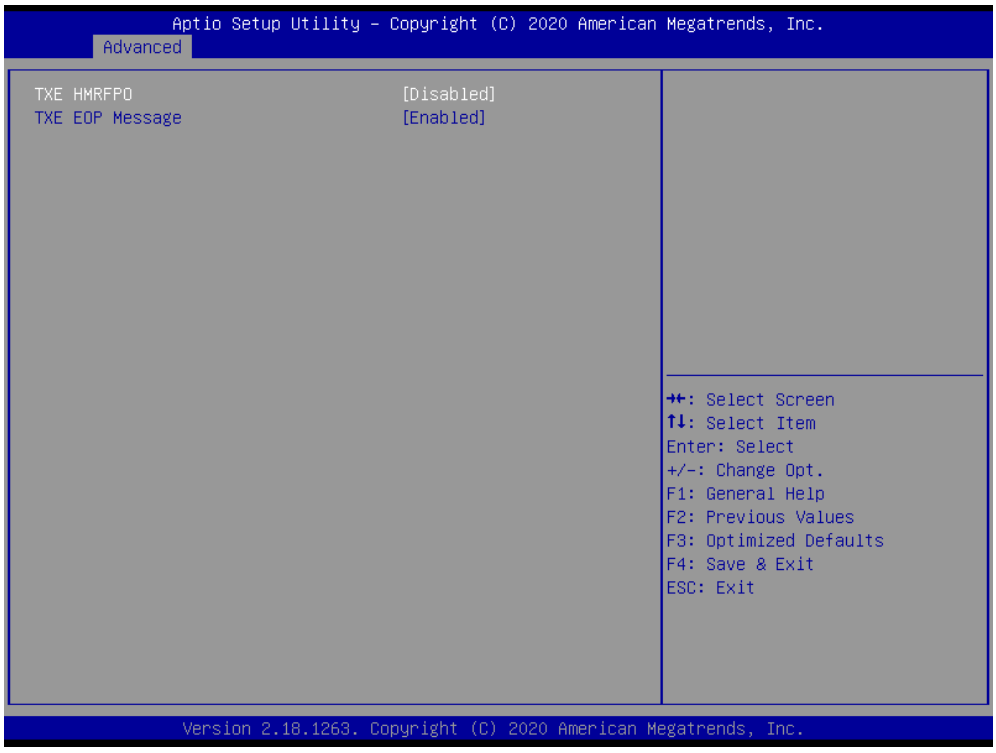


Item	Options	Description
TXE HMRFPO	Enabled, Disabled**[Default]**	TXE HMRFPO.
TXE EOP Message	Enabled**[Default]**, Disabled	Send EOP Message Before Enter OS.

3.6.2.13 System Component

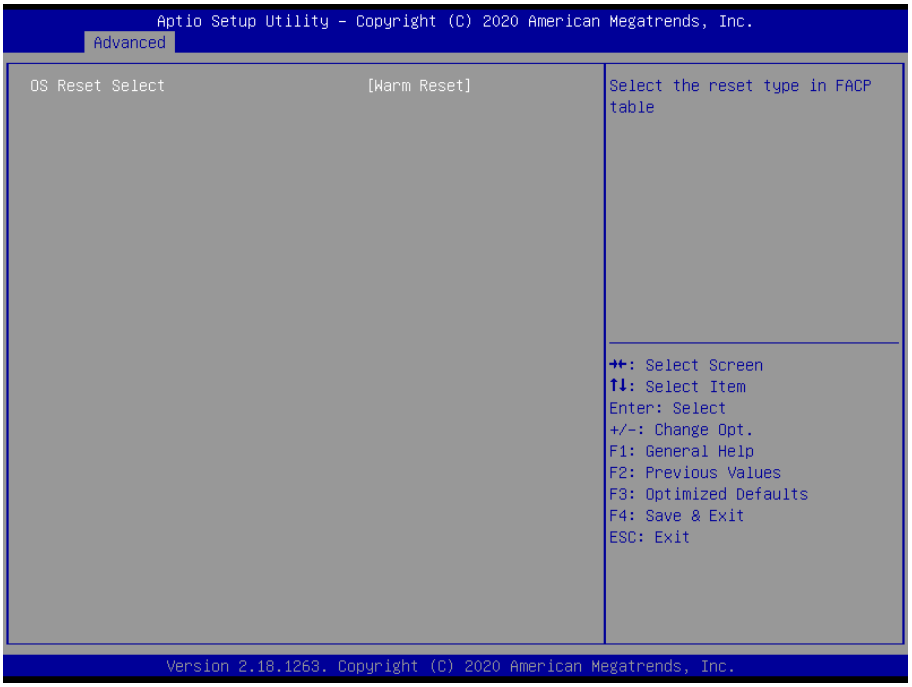

Item	Options	Description
OS Reset Select	Warm Reset**[Default]** Cold Reset	Select the reset type in FACP table.

3.6.3 Chipset

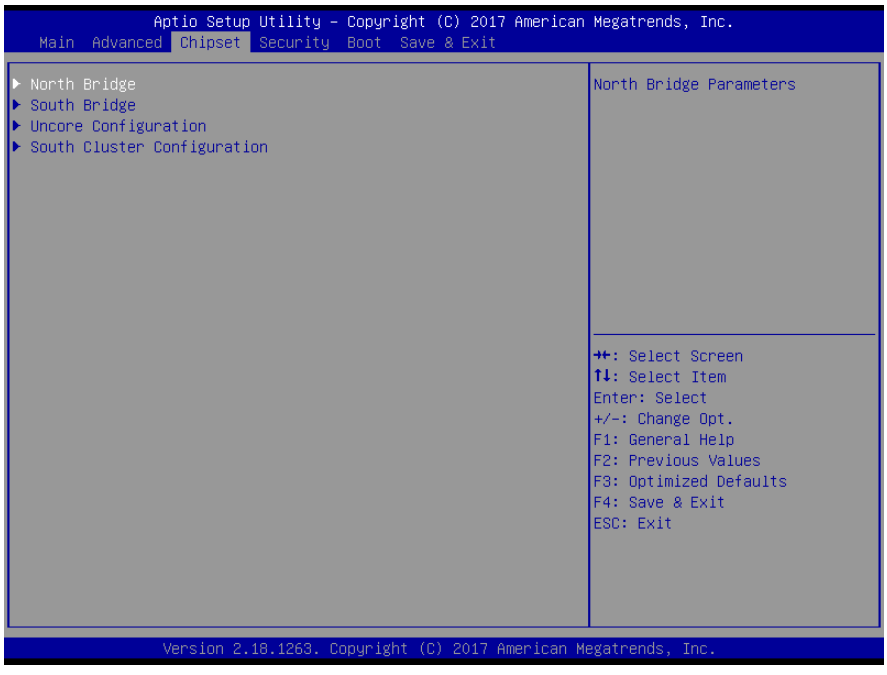


3.6.3.1 North Bridge




Item	Option	Description
Max TOLUD	2 GB**[Default]** 2.25 GB 2.5 GB 2.75 GB	Maximum Value of TOLUD.
Above 4GB MMIO BIOS assignment	Enabled Disabled**[Default]**	Enable/Disabel above 4GB MemoryMappedIO BIOS assignment This is disabled automatically when Aperture Size is set to 2048MB.

3.6.3.2 South Bridge

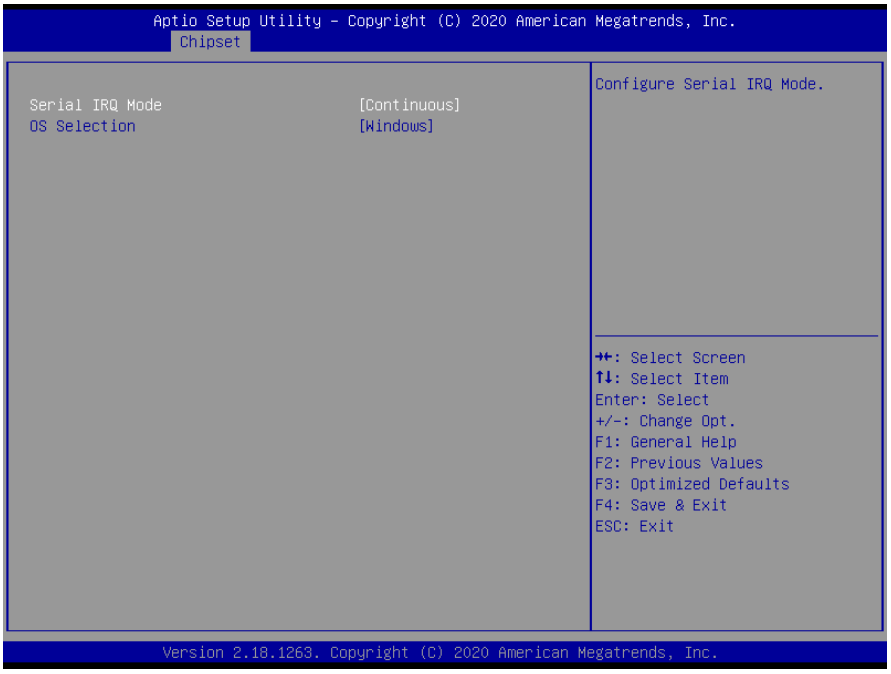

Item	Option	Description
Serial IRQ Mode	Quiet Continuous**[Default]**	Configure Serial IRQ Mode.
OS Selection	Windows**[Default]** Android Intel Linux	Select the target OS.

3.6.3.3 Uncore Configuration

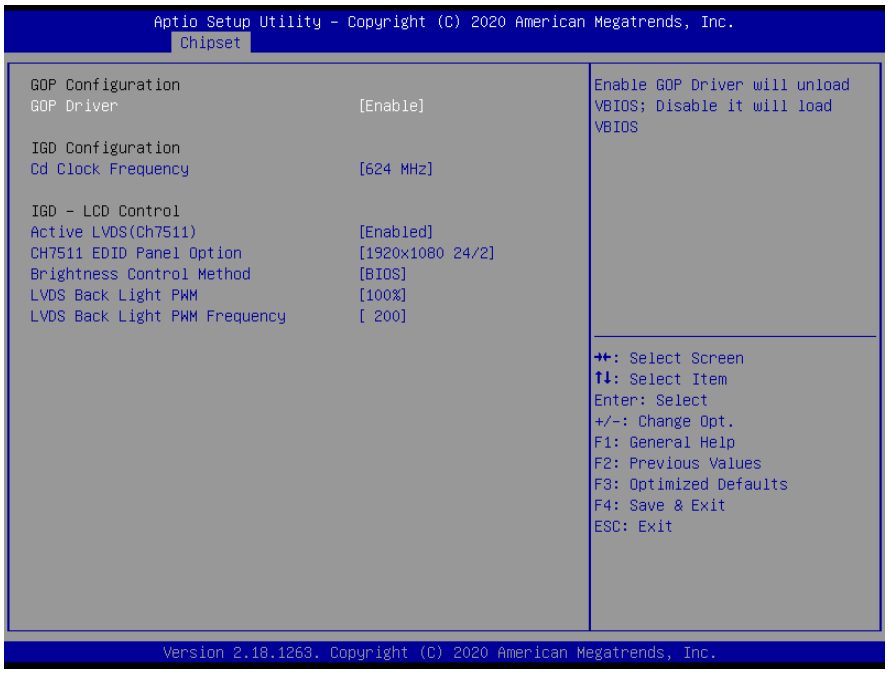


Item	Option	Description
GOP Driver	Enable**[Default]** Disable	Enable GOP Driver will unload VBIOS; Disabled it will load VBIOS.
Cd Clock Frequency	144 MHz 288 MHz 384 MHz 576 MHz 624 MHz**[Default]**	Select the highest Cd Clock frequency supported by the platform.
Active LVDS (Ch7511)	Disabled**[Default]** Enabled	Active Internal LVDS(eDP->Ch7511-to-LVDS).
CH7511 EDID Panel Option	1024x768 24/1 800x600 18/1 1024x768 18/1 1366x768 18/1 1024x600 18/1 1280x800 18/1 1920x1200 24/2 1920x1080 18/2 1280x1024 24/2 1440x900 18/2 1600x1200 24/2 1366x768 24/1 1920x1080 24/2**[Default]** 1680x1050 24/2	Port1-EDP to LVDS(Chrotel 7511) Panel EDID Option.
Brightness Control Method	BIOS**[Default]** BR Button VR OS Driver	LVDS Brightness Control Method. 1.BIOS 2.Brightness Button 3.Variable Resistor 4.OS Driver.
LVDS Back Light PWM	00% 25% 50% 75% 100%**[Default]**	Select LVDS back light PWM duty.
LVDS Back Light PWM Frequency	200**[Default]** 300 400 500 700 1k 2k 3k 5k 10k 20k	Select LVDS back light PWM Frequency.

3.6.3.4 South Cluster Configuration




3.6.3.4.1 HD-Audio Configuration

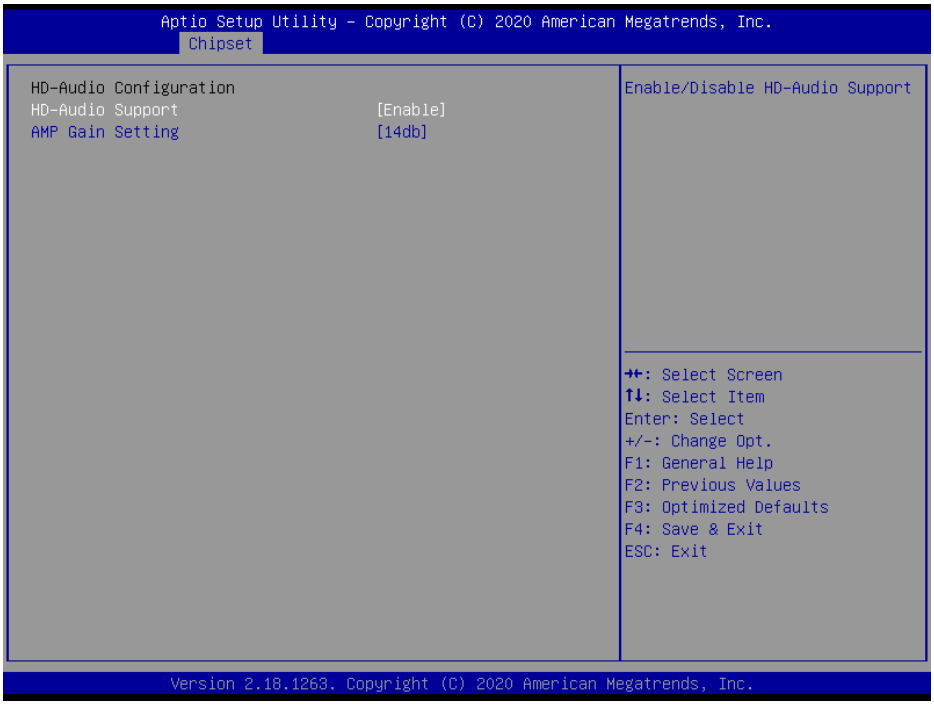


Item	Option	Description
HD-Audio Support	Disable Enable**[Default]**,	Enable/Disable HD-Audio Support.

AMP Gain Setting	11db 14db**[Default]** 19db 25db	Select AMP Gain db.


3.6.3.4.2 PCI Express Configuration

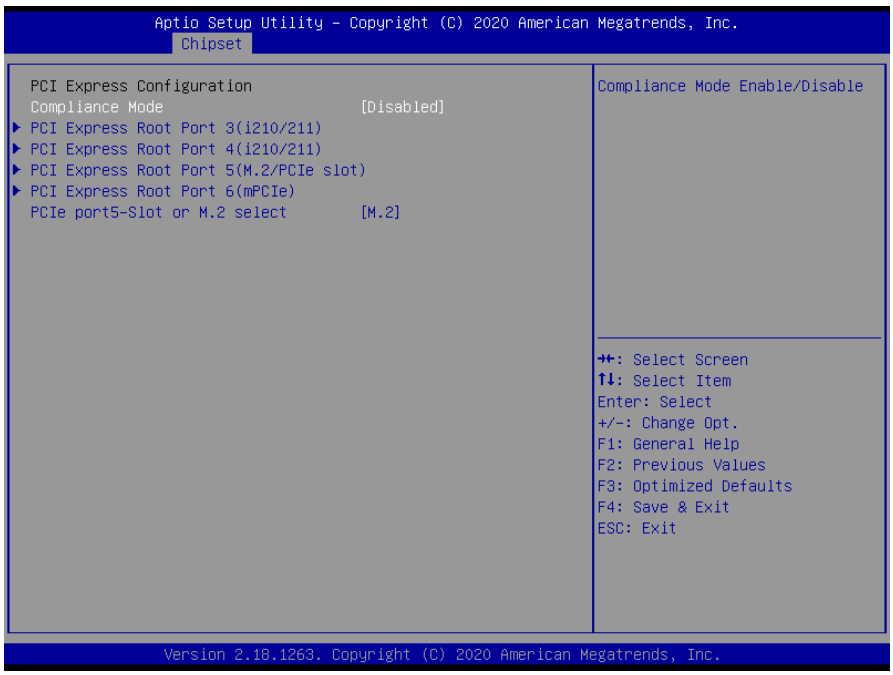

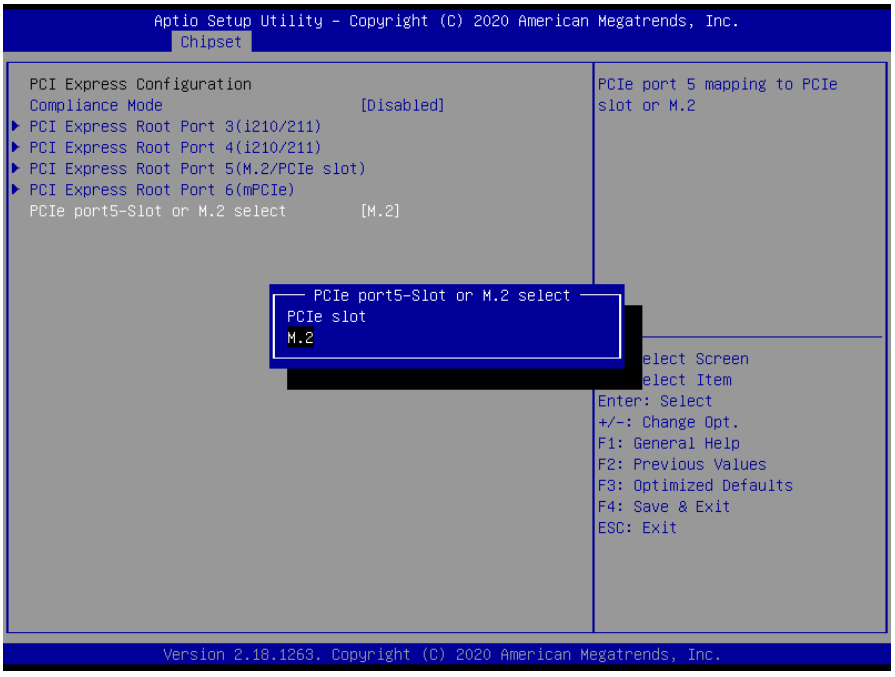


Item	Option	Description
PCIe port5-Slot or M.2 select	PCIe slot M.2**[Default]**,	PCIe port5 mapping to PCIe slot or M.2.

3.6.3.4.2.1 PCI Express Root Port 3(i210/211)

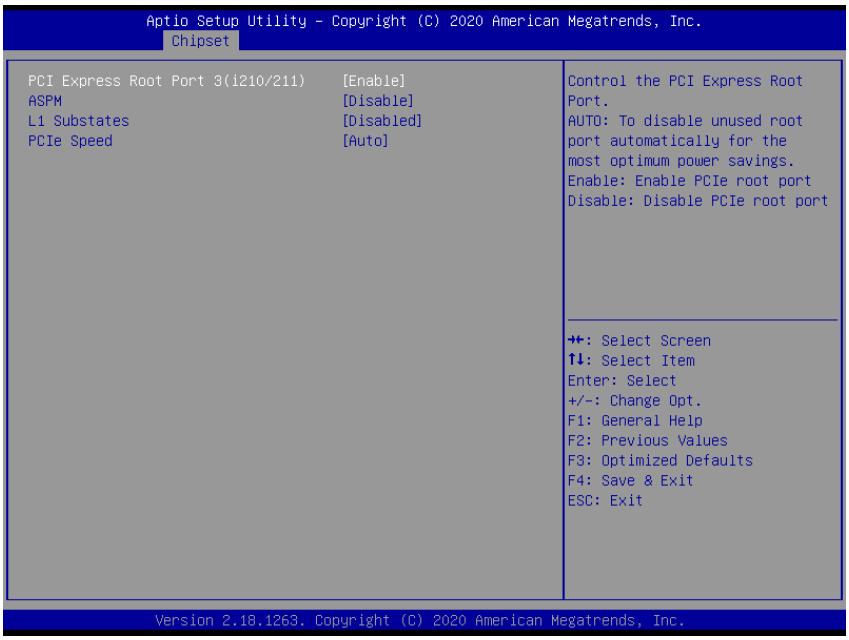


Item	Option	Description
PCI Express Root Port 3(i210/211)	Disable Enable**[Default]**	Control the PCI Express Root Port. AUTO: To disable unused root port automatically for the most optimum power savings. Enable: Enable PCIe root port Disable: Disable PCIe root port.
ASPM	Disable**[Default]** L0s L1 L0sL1 Auto	PCI Express Active State Power Management settings.
L1 Substates	Disabled**[Default]** L1.1 L1.2 L1.1 & L1.2	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2	Configure PCIe Speed.

3.6.3.4.2.2 PCI Express Root Port 4(i210/211)

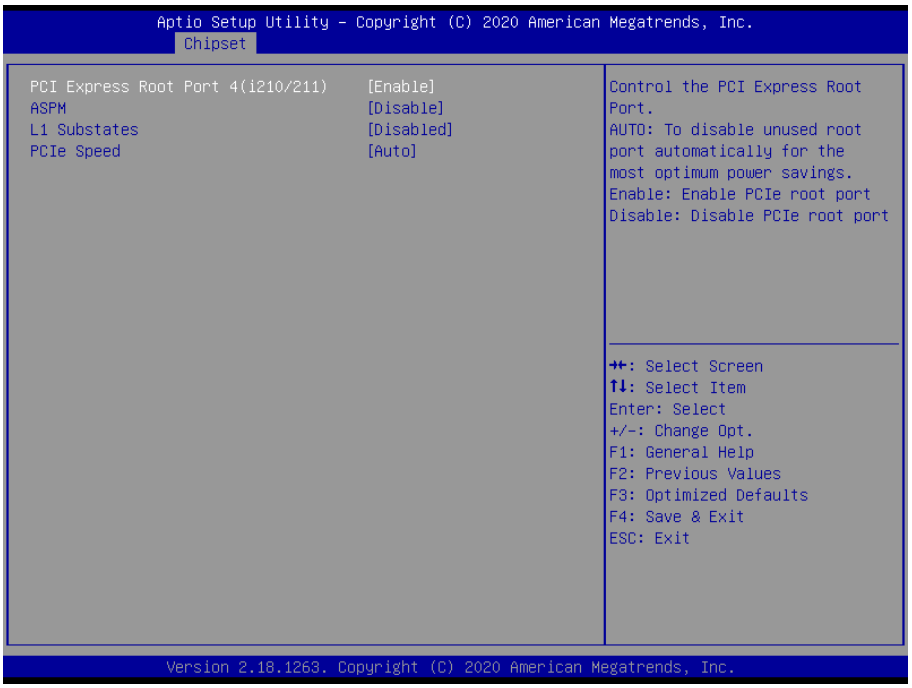


Item	Option	Description
PCI Express Root Port 4(i210/211)	Disable Enable**[Default]**	Control the PCI Express Root Port. AUTO: To disable unused root port automatically for the most optimum power savings. Enable: Enable PCIe root port Disable: Disable PCIe root port.
ASPM	Disable**[Default]** L0s L1 L0sL1 Auto	PCI Express Active State Power Management settings.
L1 Substates	Disabled**[Default]** L1.1 L1.2 L1.1 & L1.2	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2	Configure PCIe Speed.

3.6.3.4.2.3 PCI Express Root Port 5(M.2/PCIe slot)

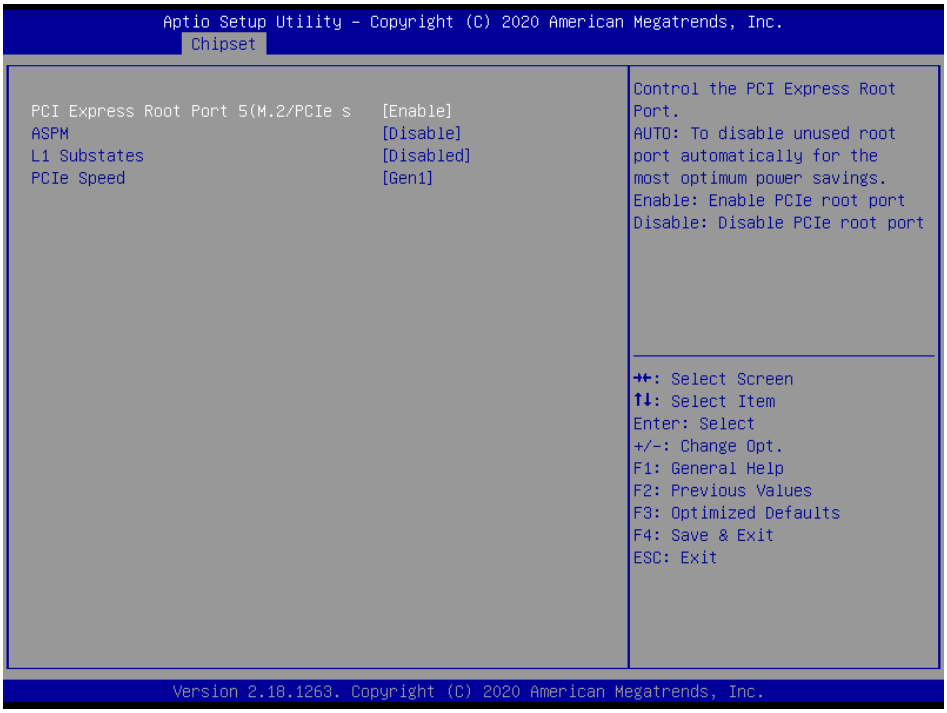


Item	Option	Description
PCI Express Root Port 5(M.2/PCIe slot)	Disable Enable**[Default]**	Control the PCI Express Root Port. AUTO: To disable unused root port automatically for the most optimum power savings. Enable: Enable PCIe root port Disable: Disable PCIe root port.
ASPM	Disable**[Default]** L0s L1 L0sL1 Auto	PCI Express Active State Power Management settings.
L1 Substates	Disabled**[Default]** L1.1 L1.2 L1.1 & L1.2	PCI Express L1 Substates settings.
PCIe Speed	Auto Gen 1**[Default]** Gen 2	Configure PCIe Speed.

3.6.3.4.2.4 PCI Express Root Port 6(mPCIe)

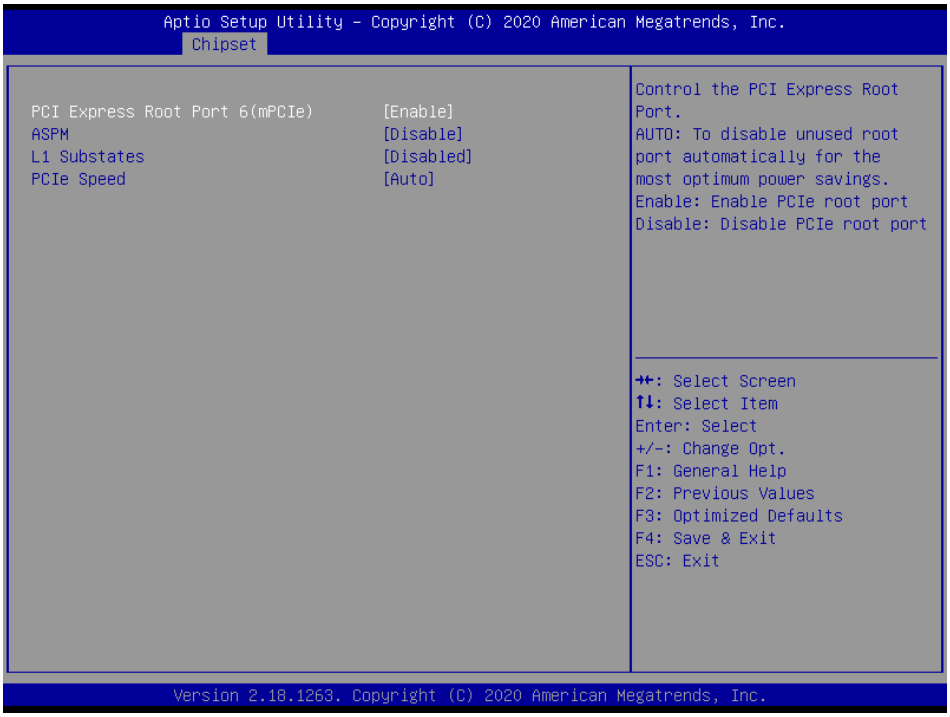


Item	Option	Description
PCI Express Root Port 6(mPCIe)	Disable Enable**[Default]**	Control the PCI Express Root Port. AUTO: To disable unused root port automatically for the most optimum power savings. Enable: Enable PCIe root port Disable: Disable PCIe root port.
ASPM	Disable**[Default]** L0s L1 L0sL1 Auto	PCI Express Active State Power Management settings.
L1 Substates	Disabled**[Default]** L1.1 L1.2 L1.1 & L1.2	PCI Express L1 Substates settings.
PCIe Speed	Auto**[Default]** Gen 1 Gen 2	Configure PCIe Speed.

3.6.3.4.3 SATA Drives

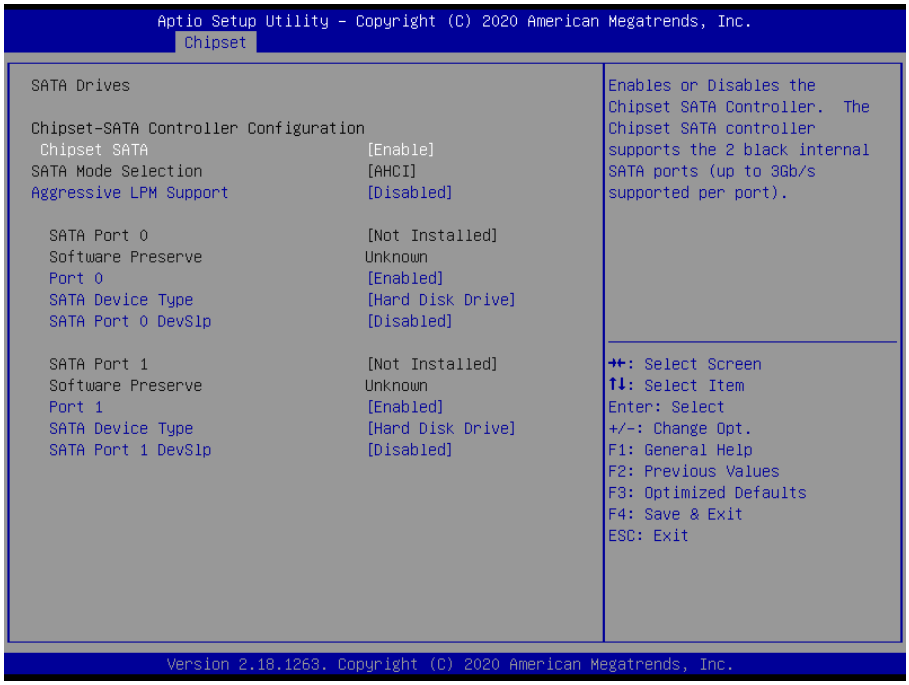


Item	Option	Description
Chipset SATA	Enable**[Default]**, Disable	Enables or Disables the Chipset the SATA Controller. The Chipset SATA controller supports the 2 black internal SATA ports (up to 3Gb/s supported per port).
Aggressive LPM Support	Disabled**[Default]** Enabled	Enable PCH to aggressively enter link power state.
Port 0/1	Disabled Enabled**[Default]**	Enable or Disable SATA Port.
SATA Device Type	Hard Disk Drive**[Default]** Solid State Drive	Identify the SATA port is connected to Solid State Driver or Hard Disk Drive.
SATA Port 0/1 DevSlp	Disabled**[Default]** Enabled	Enable/Disable SATA Port 0/1 DevSlp. Board rework for LP needed before enable.

3.6.3.4.4 SCC Configuration

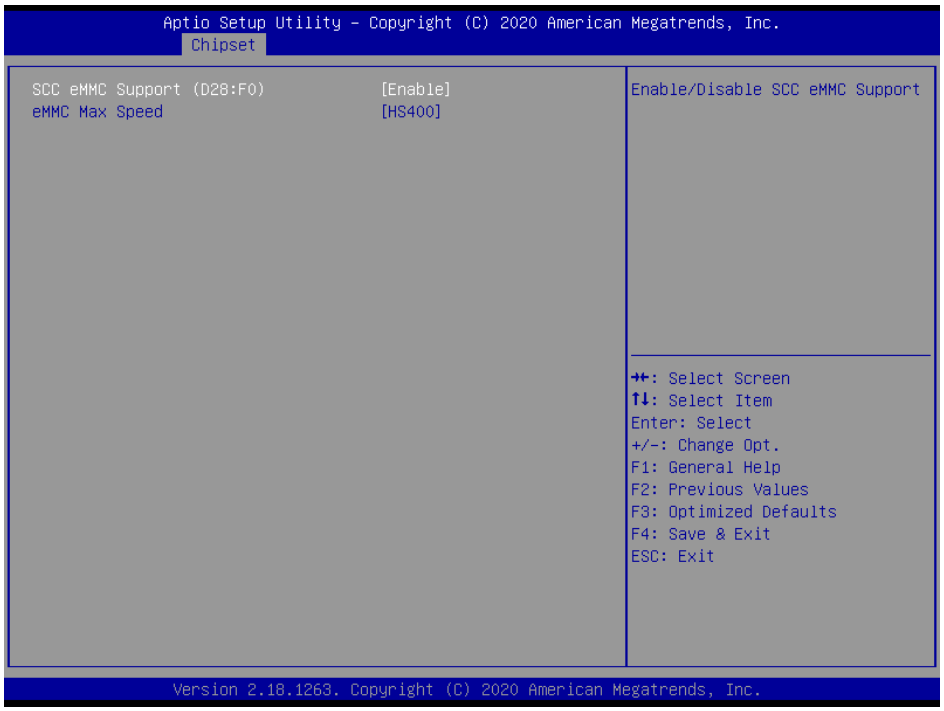


Item	Option	Description
SCC eMMC Support (D28:F0)	Disable Enable**[Default]**,	Enable/Disable SCC eMMC Support.
eMMC Max Speed	HS400**[Default]**, HS200 DDR50	Select the eMMC max Speed allowed.

3.6.3.4.5 USB Configuration

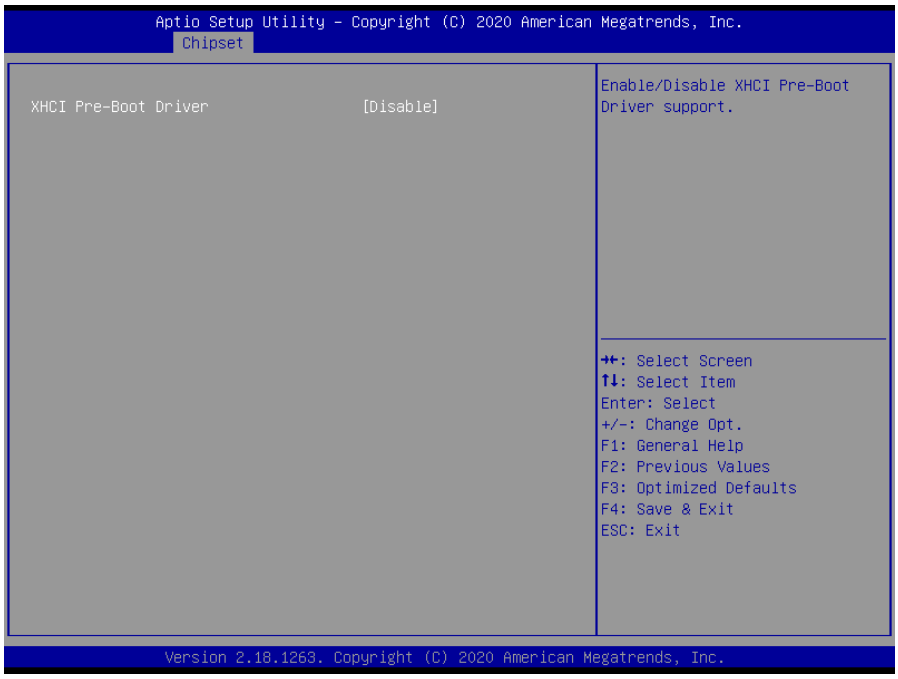

Item	Option	Description
XHCI Pre-Boot Driver	Enable, Disable**[Default]**	Enable/Disable XHCI Pre-Boot Driver support.

3.6.4 Security

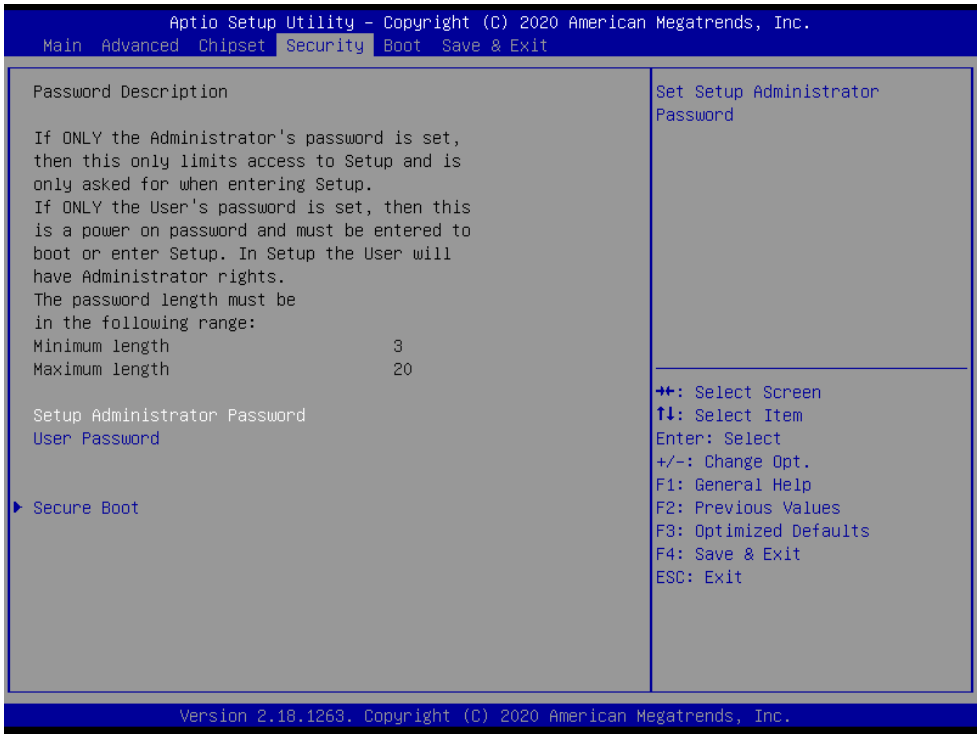


- **Setup Administrator Password**

Set setup Administrator Password

- **User Password**


Set User Password

3.6.4.1 Secure Boot

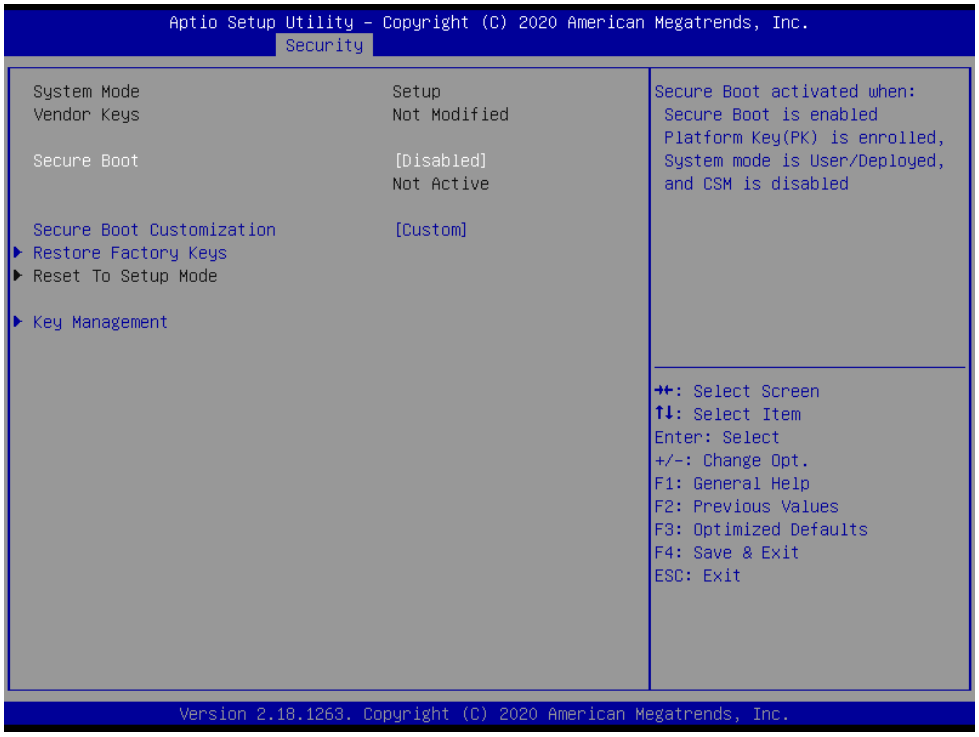


Item	Option	Description
Secure Boot Mode	Disabled**[Default]** Enabled	Secure Boot activated when:Secure Boot is enabled, Platform Key(PK) is enrolled, System mode is User/Deployed, and CSM is disabled.
Secure Boot Customization	Standard Custom**[Default]**	Secure Boot Mode –Custom_Standard, Set UEFI Secure Boot Mode to STANDARD mode or CUSTOM mode or CUSTOM mode, this change is effect after save. And after reset, the mode will return to STANDARD mode.

3.6.5 Boot

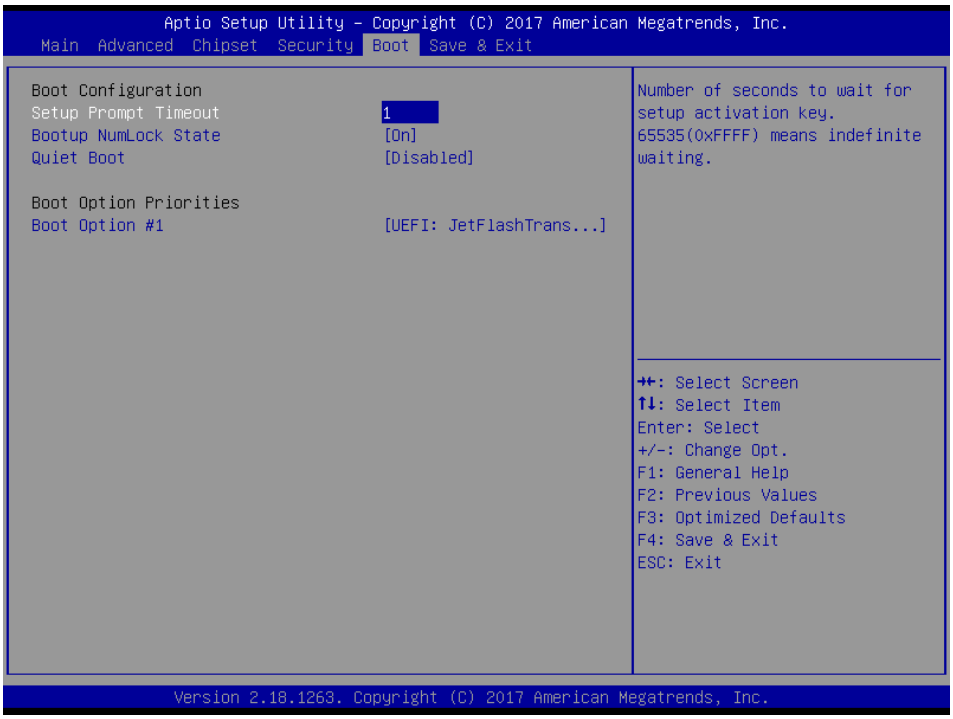

Item	Option	Description
Setup Prompt Timeout	1~ 65535	Number of seconds to wait for setup activation key. 65535(0xFFFF) means indefinite waiting.
Bootup NumLock State	On**[Default]** Off	Select the Keyboard NumLock state
Quiet Boot	Disabled**[Default]** Enabled	Enables or disables Quiet Boot option
Boot Option #1	Set the system boot order.	

3.6.6 Save and exit

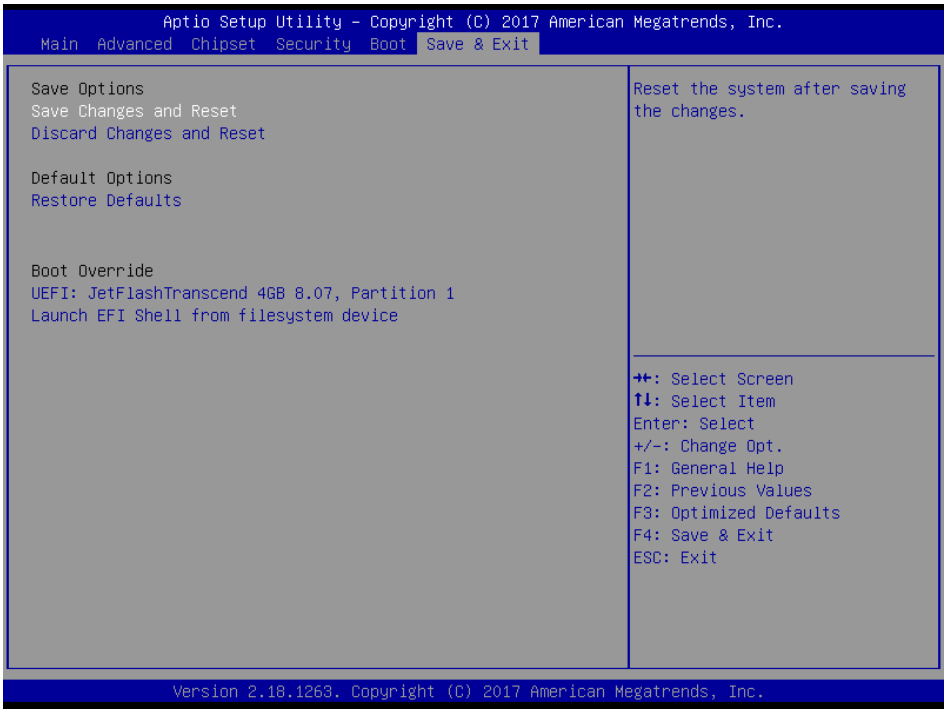

3.6.6.1 Save Changes and Reset

Reset the system after saving the changes.

3.6.6.2 Discard Changes and Reset

Any changes made to BIOS settings during this session of the BIOS setup program are discarded. The setup program then exits and reboots the controller.

3.6.6.3 Restore Defaults

This option restores all BIOS settings to the factory default. This option is useful if the controller exhibits unpredictable behavior due to an incorrect or inappropriate BIOS setting.

3.6.6.4 Launch EFI Shell from filesystem device

Attempts to Launch EFI Shell application (Shellx64.efi) from one of the available filesystem devices.

4. Drivers Installation




Note: Installation procedures and screen shots in this section are for your reference and may not be exactly the same as shown on your screen.

4.1 Install Chipset Driver

All drivers can be found on the Avalue Official Website:
www.avalue.com.


Note: The installation procedures and screen shots in this section are based on Windows 10 operation system. If the warning message appears while the installation process, click Continue to go on.

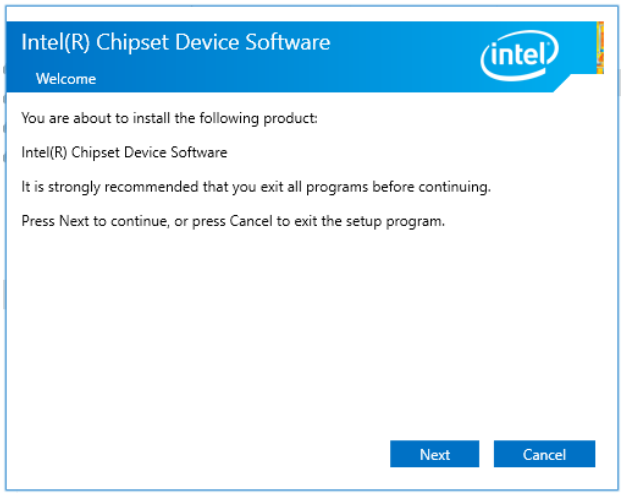

Step1. Click **Next**.



Step 2. Click **Accept**.

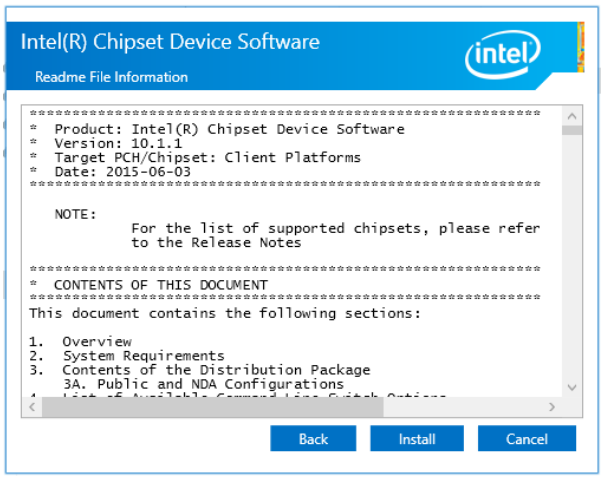

Step 3. Click **Install**.




Step 4. Click **Finish** to complete setup.


4.2 Install VGA Driver

All drivers can be found on the Avalue Official Website:
www.avalue.com.


Note: The installation procedures and screen shots in this section are based on Windows 10 operation system. If the warning message appears while the installation process, click Continue to go on.

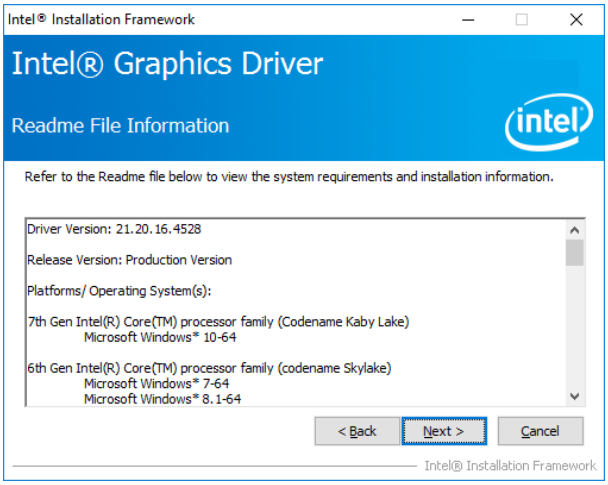


Step 3. Click **Next.**

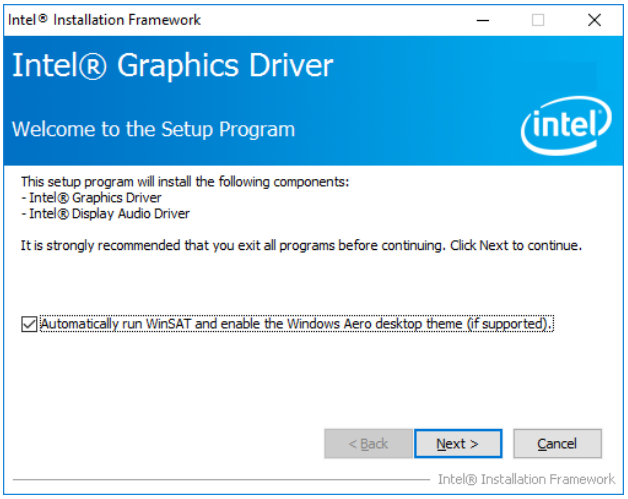

Step 1. Click **Next** to continue installation.

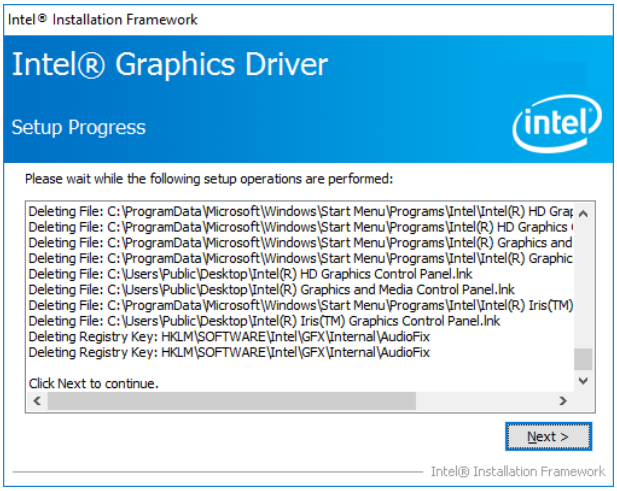


Step 4. Click **Next**.

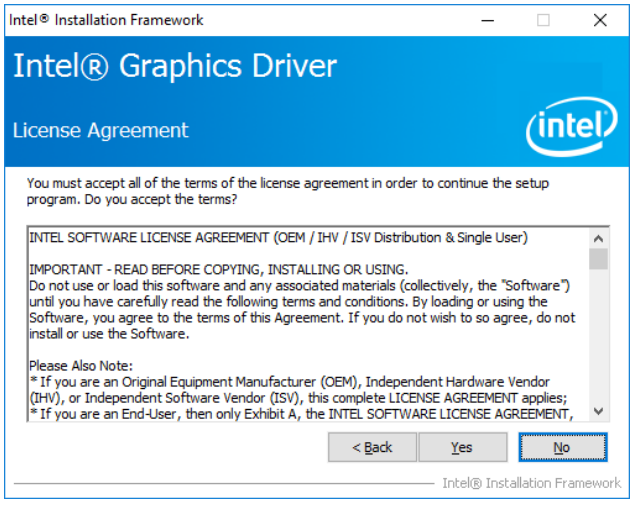

Step 2.

Click **Yes** to accept license agreement.

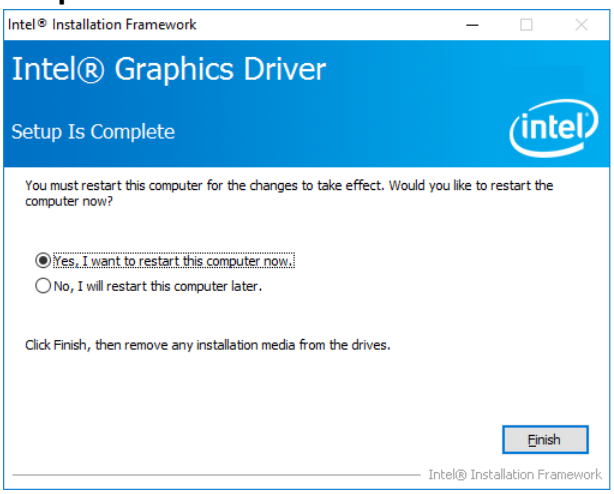


Step 5. Click **Finish** to complete setup.

4.3 Install Serial IO Driver


All drivers can be found on the Avalue Official Website:

www.avalue.com.


Note: The installation procedures and screen shots in this section are based on Windows 10 operation system. If the warning message appears while the installation process, click Continue to go on.

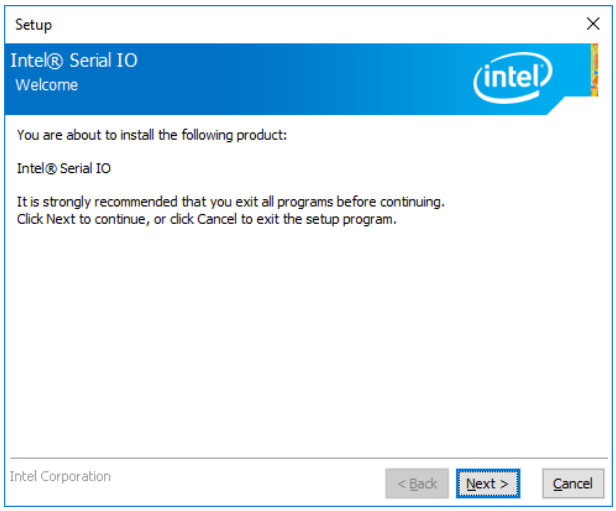


Step 1. Click **Next** to continue setup.

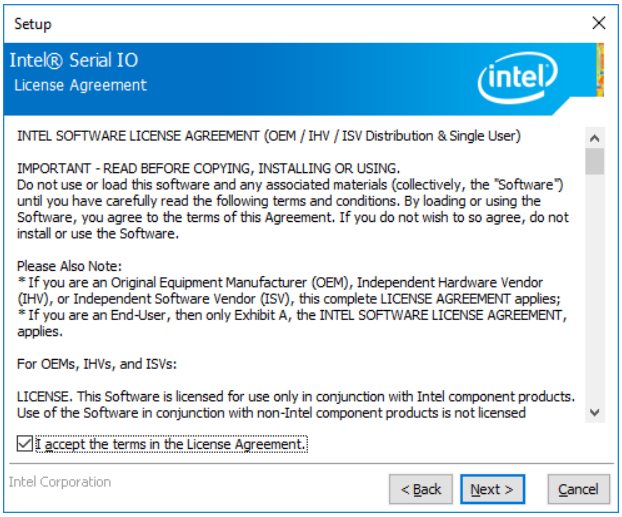


Step 2. Click **Next**.

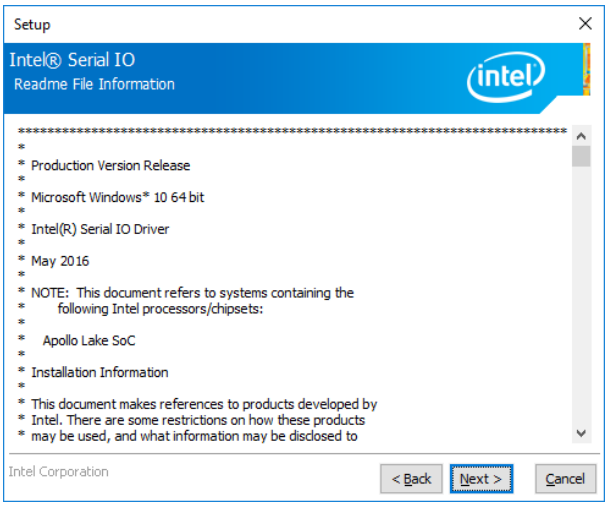

Step 3. Click **Next**.

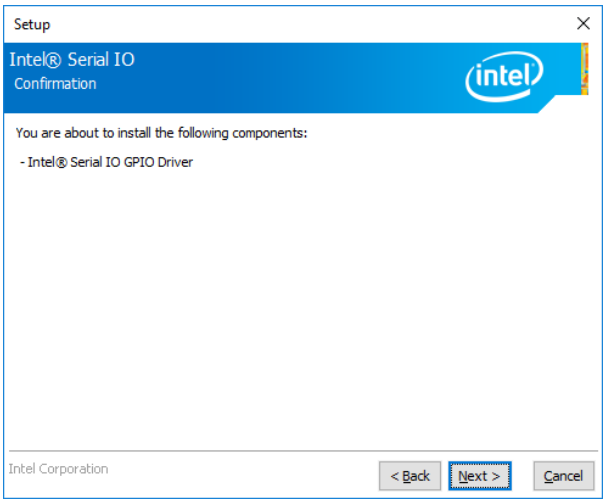

Step 4. Click **Next**.

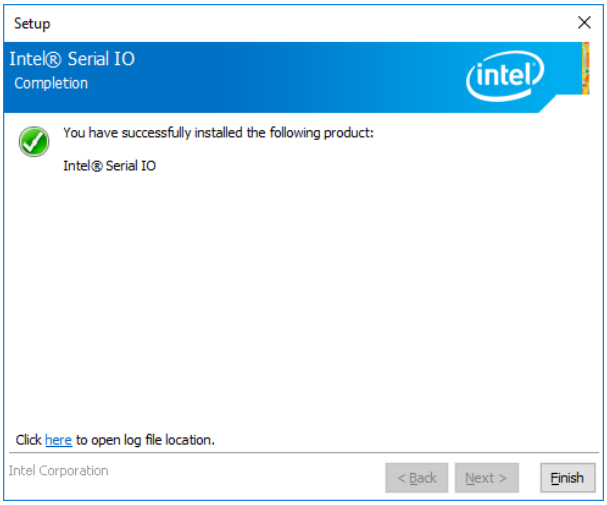


Step 5. Click **Finish** to complete the setup.


4.4 Install TXE Driver

All drivers can be found on the Avalue Official Website: **www.avalue.com**.


Note: The installation procedures and screen shots in this section are based on Windows 10 operation system. If the warning message appears while the installation process, click Continue to go on.

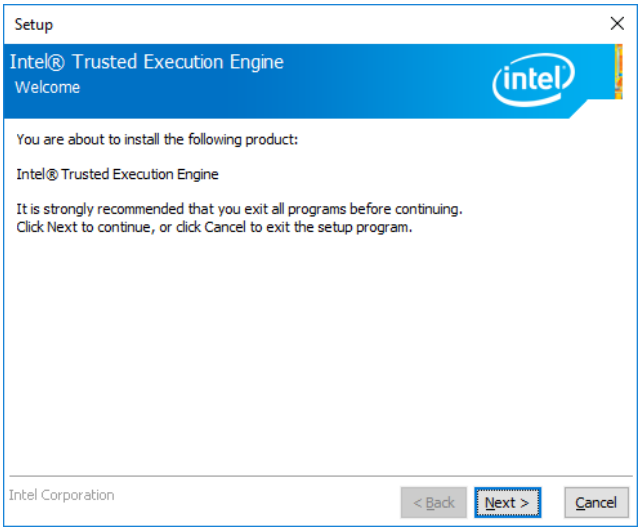


Step 1. Click **Next** to continue setup.

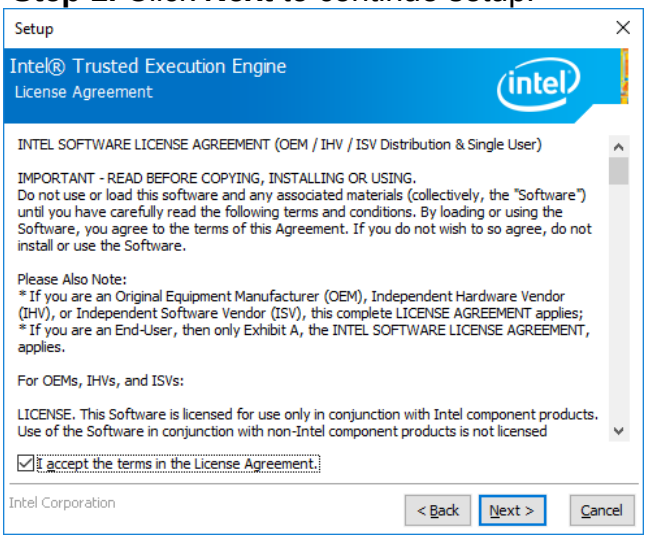

Step 2. Click **Next**.

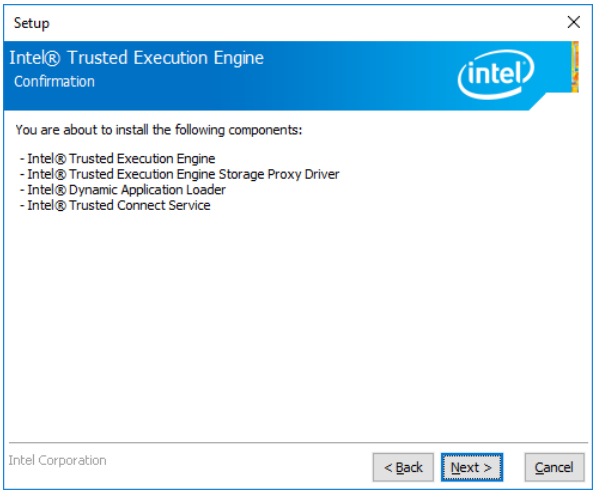

Step 3. Click **Next**.

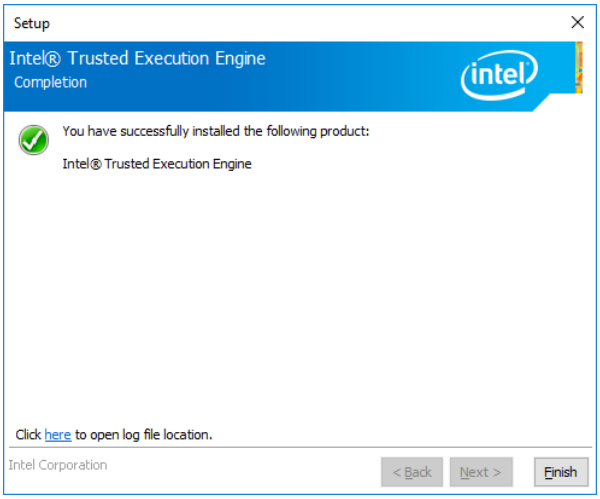


Step 4. Click **Finish** to complete the setup.


4.5 Install Audio Driver (For Realtek ALC662 HD Audio)

All drivers can be found on the Avalue Official Website:
www.avalue.com.

Note: The installation procedures and screen shots in this section are based on Windows 10 operation system. If the warning message appears while the installation process, click Continue to go on.

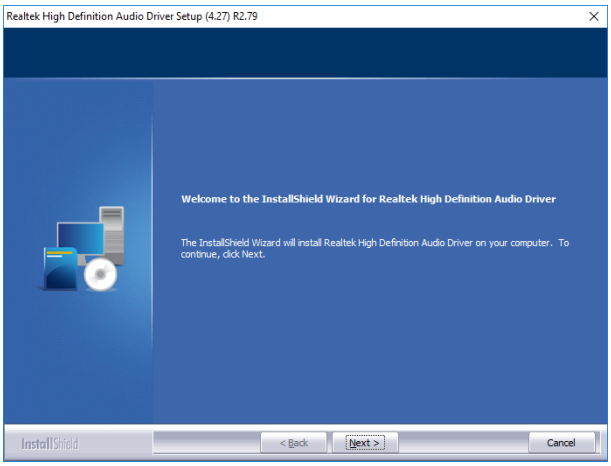

Step1. Click **Next** to Install.

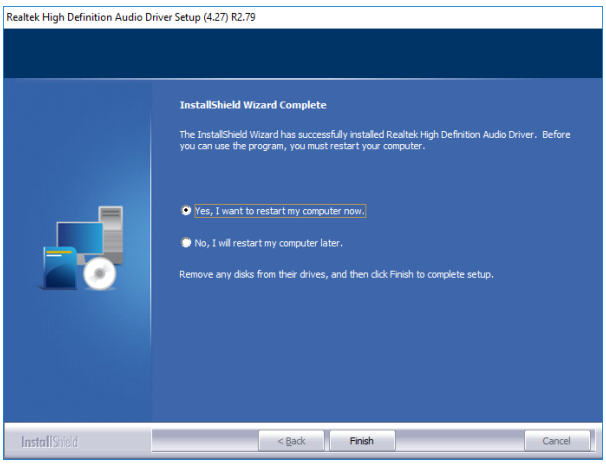


Step 2. Select **Finish** to complete Installation.


4.6 Install LAN Driver (For Intel I211AT)

All drivers can be found on the Avalue Official Website: www.avalue.com.


Note: The installation procedures and screen shots in this section are based on Windows 10 operation system. If the warning message appears while the installation process, click Continue to go on.

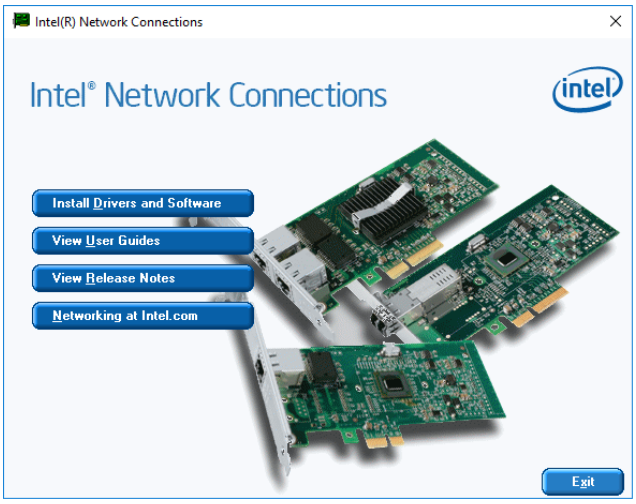


Step 1. Click **Install Drivers and Software**.

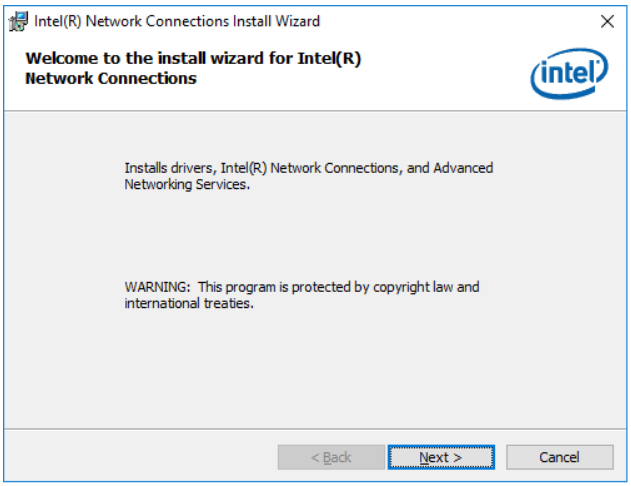


Step 2. Click **Next**.

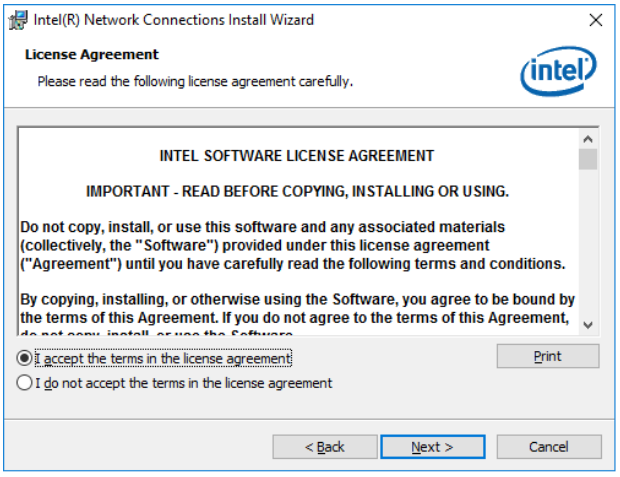


Step 3. Click **Next**.

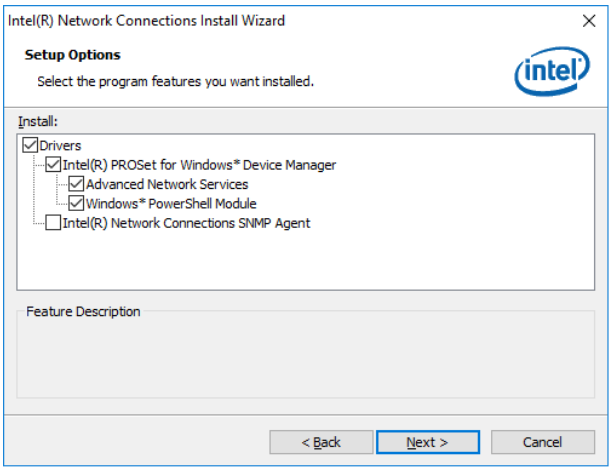


Step 4. Click **Next**.

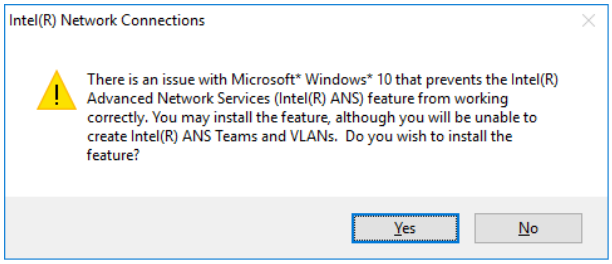

Step 5. Click **Yes**.

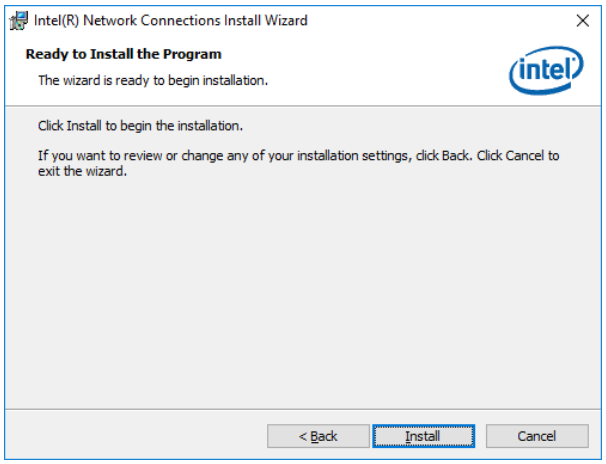

Step 6. Click **Install**.

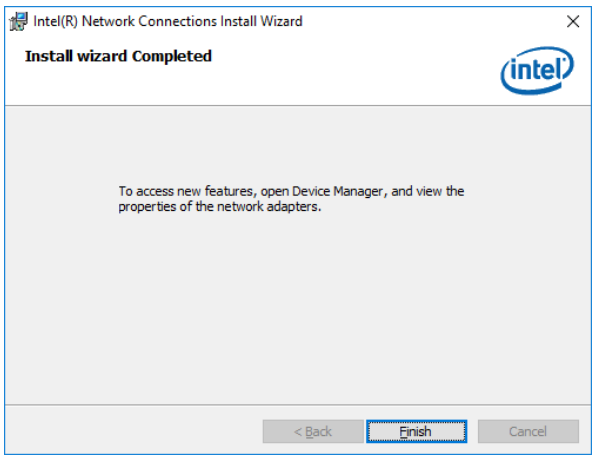

Step 7. Click **Finish** to complete setup.

5. Development Resource

Here you can find development resource for OFP-15W33

Datasheet

LCD Datasheet(eDP)

Touch Screen Datasheet

Adapter Datasheet

CE/FCC test Report (Product Design Verification Report)

Here you can find information for Software development

How to flash Android image file



Note: If you need more information, please visit our website:

www.avalue.com